



### IMPORTANT SAFETY PRECAUTIONS

**Before you begin, read these instructions completely and carefully.**

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire's ventilation by covering with material that will cause luminaire to overheat and potentially shorten the life span.
- Ensure LED luminaire has the correct polarity before installation.




**WARNING:** To reduce the risk of personal injury or property damage from fire, electrical shock, falling parts, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions.

This product should be installed, inspected and maintained by a qualified and licensed electrician. Installation of luminaire must be in accordance with NEC and local code requirements.


**SAVE THESE INSTRUCTIONS**

## ELECTRICAL CONNECTIONS

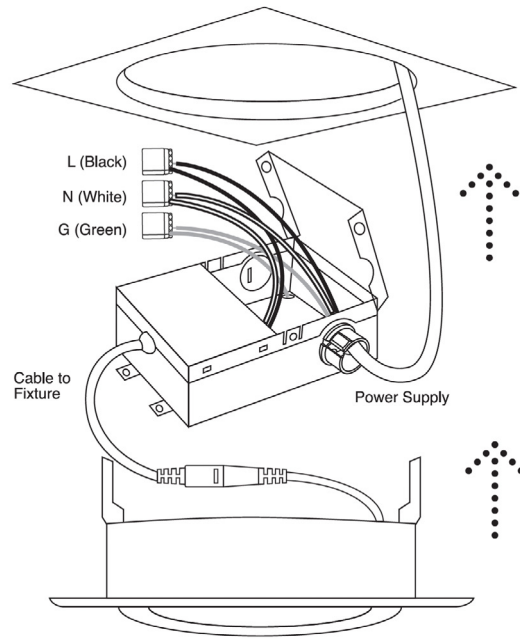

Figure

## INSTALLATION INSTRUCTIONS

- A) Cut a hole in the ceiling in accordance to the hole dimensions mentioned above (approximate size).
- B) Open the junction box cover and remove knock-outs.
- C) AC-120v 50/60Hz - Feed your cable (Romex (NMD90) or AC90 (BX)) through the junction box and secure cable with proper Romex I BX connectors (not provided).
- D) Using wire nut / push fit connector to connect the following cables. Connect the Ground cable (G) green, with the ground cable. Connect the White cable (N) to the white wire in the box. Connect the Black cable (L) to the black wire in the box (see figure).
- E) Ensure all cables are in the junction box, and screw lid closed.
- F) Secure box in a suitable position, such as a stud, joist, mounting plate or similar fixed structure.
- G) Connect the slim gimbal to the hardware by inserting the male and female connectors together.
- H) Hold spring clips against fixture and gently guide into mounting hole until spring clips snap into place. Fixture should be flush with ceiling.
- I) Once assembly is complete turn on power to confirm fixture is working correctly.
- J) Installation is complete. 

## NOTE

It is recommended to keep each slim gimbal matched with the junction box that it comes with when installing multiple gimbals.  
 Suitable for Damp location. Access above ceiling required.