

## IMPORTANT SAFETY PRECAUTIONS

**Before you begin, read these instructions completely and carefully.**

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire's ventilation by covering with material that will cause luminaire to overheat and potentially shorten the life span.
- Ensure LED luminaire has the correct polarity before installation.



**WARNING:** To reduce the risk of personal injury or property damage from fire, electrical shock, falling parts, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions.


This product should be installed, inspected and maintained by a qualified and licensed electrician. Installation of luminaire must be in accordance with NEC and local code requirements.

**SAVE THESE INSTRUCTIONS**




## DIMENSIONS


**RPR-FR-4-F**

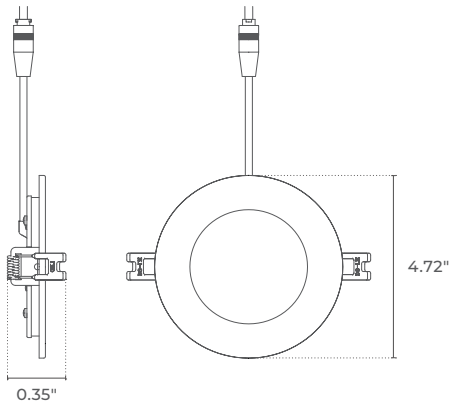

**RPR-FR-4-R**

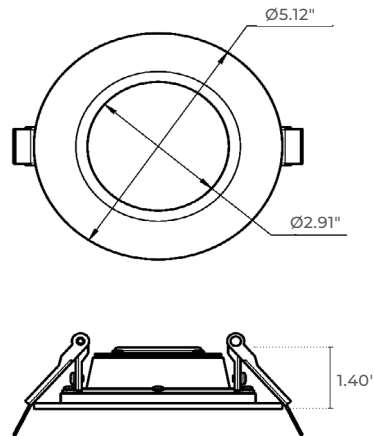


**RPR-FR-6-R**

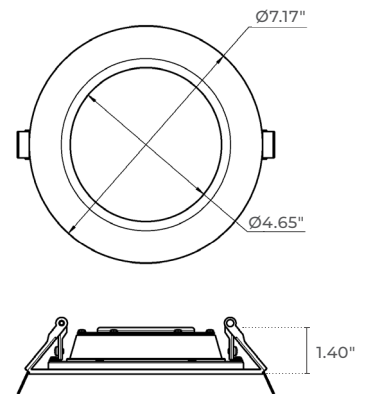

## INSTALLATION INSTRUCTIONS

**A)** Determine the location for installation and cut ceiling hole in accordance with cut-hole dimensions. (Ceiling thickness range 1/2 ~ 1-1/2 inch).




### ROUND CUT-HOLE

3-Inch	Ø3.14"
4-Inch	Ø4.25"
5-Inch	Ø5.19"
6-Inch	Ø6.22"


### SQUARE CUT-HOLE

3-Inch	3.14" x 3.14"
4-Inch	4.25" x 4.25"
5-Inch	5.19" x 5.19"
6-Inch	6.22" x 6.22"


**D)** Push spring-loaded clips on the fixture upwards and insert fixture base in to the mounting hole. Release the clips and fixture will be pulled flush to the ceiling.

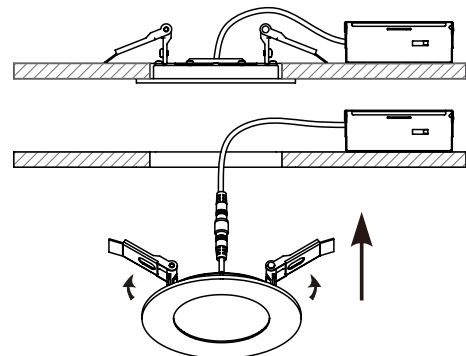

**B)** Open the junction box cover and remove the appropriate knockout(s) on the side panel. Insert the electrical supply cable through the knockout and secure with a cable connector (sold separately). Using quick-connect push-in terminals, connect the ground wire to the green wire terminal; black wire to the black wire terminal; white wire to the white wire terminal.

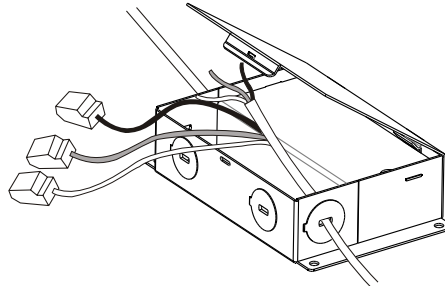

**C)** Place all wiring and connections back in to the box and close cover. Connect the driver to the light panel. Choose the color temperature you want. Inset junction box through the mounting hole.

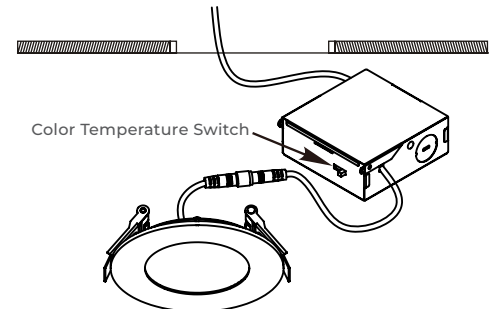

**E)** Installation is complete. 

**SAVE THESE INSTRUCTIONS**

