



PROJECT  DATE

COMMENTS



IN STOCK



#### ENERGY CHART

SIZE	DIAMETER inches	LUMENS	WATTAGE	EFFICACY lm/w
3	3	390	6	65
4	4	675	9	75
6	6	960	12	80
		1200	15	80
8	8	1440	18	80
12	12	1920	24	80

#### ORDERING LOGIC

EX: RPR-3

FAMILY	SIZE	WATTAGE
For 6" Product Only		
<b>RPR</b>		
	<b>3 3"</b>	<b>12</b> 12W
	<b>4 4"</b>	<b>15</b> 15W
	<b>6</b> 6"	
	<b>8</b> 8"	
	<b>12</b> 12"	

## RPR RECESSED PANEL ROUND LED

The RPR Series offers a low-profile, high output recessed mount LED luminaire that meets Energy Star's efficiency standards.

- Residential
- Commercial
- Hospitality

#### PHYSICAL

Material	Die-Cast Aluminum
Mounting	Recessed
Lens	Polycarbonate Diffuser
Finish	White
CCT	Field Selectable 5CCT: 2700K, 3000K, 3500K, 4000K, 5000K
CRI	90+
Beam Angle	120°






#### PERFORMANCE

Warranty	5 years
Certifications	Wet Location, IC Rated, Title 24, CETL Energy Star
Rated Life	L70 50,000 hours
Operating Temperature	-20°C to 40°C (-4°F to 104°F)

#### ELECTRICAL

Wattage	6W, 9W, 12W, 15W, 18W, 24W
Voltage	120V
Power Factor	>0.90
Dimmable	Triac Dimming

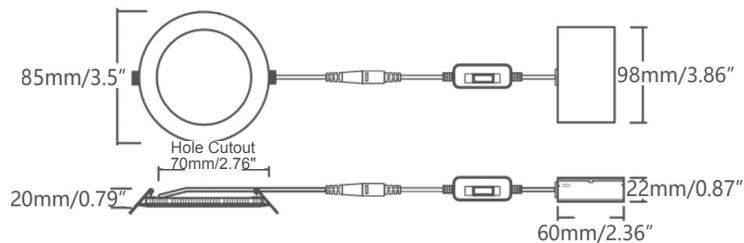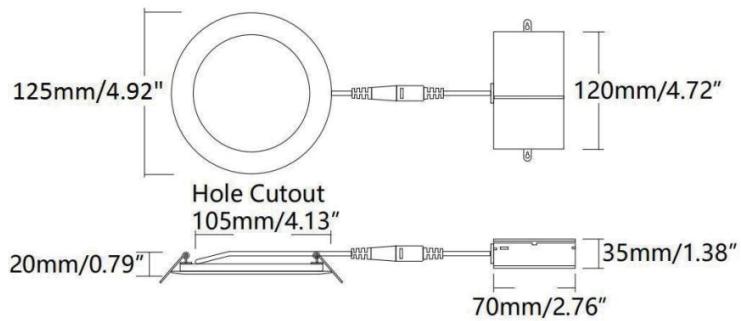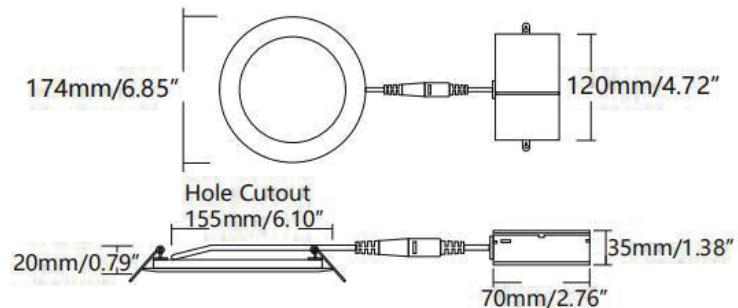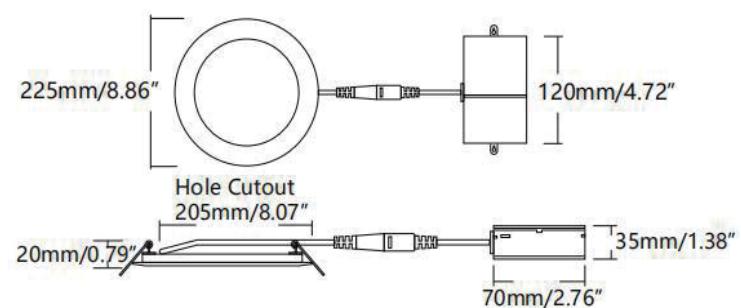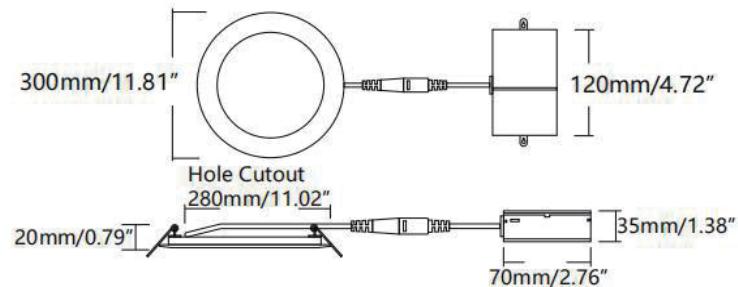

**DIMENSIONS**
**3" Product**

**4" Product**

**6" Product**

**8" Product**

**12" Product**

**RECOMMENDED MOUNTING PLATE**
**NCP-346** NEW CONSTRUCTION PLATE FOR 3/4/6" DOWNLIGHT
