



IMPORTANT SAFETY PRECAUTIONS

Before you begin, read these instructions completely and carefully.

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire's ventilation by covering with material that will cause luminaire to overheat and potentially shorten the life span.



WARNING: To reduce the risk of personal injury or property damage from fire, electrical shock, falling parts, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions.

This product should be installed, inspected and maintained by a qualified and licensed electrician. Installation of luminaire must be in accordance with NEC and local code requirements.

SAVE THESE INSTRUCTIONS



TOOLS REQUIRED

- A) Screwdriver
- B) Wire strippers
- C) UL-listed wire connectors
- D) Electrical tape

INSTALLATION INSTRUCTIONS

STEP 1 — SHUT OFF POWER

Turn off power at the circuit breaker panel.

STEP 2 — REMOVE EXISTING FIXTURE (IF APPLICABLE)

Remove the existing fixture.
Disconnect wiring.
Expose supply wires from the junction box.

STEP 3 — MOUNT THE CROSSBAR

Attach the crossbar to the junction box using the provided screws.
Ensure the crossbar is level and secure.

STEP 4 — MAKE ELECTRICAL CONNECTIONS

Connect fixture wires to supply wires as follows:
White (Neutral) → White (Neutral)
Black (Hot) → Black (Hot)
Green or Bare Copper (Ground) → Ground wire in junction box

Secure connections using UL-listed wire connectors.
Wrap connections with electrical tape if required by local code.

For fixtures with ribbed/smooth wire identification:
Ribbed wire = Neutral (White)
Smooth wire = Hot (Black)

Carefully tuck wires into the junction box.
Separate black wires to one side and white wires to the opposite side of the box.

STEP 5 — ATTACH FIXTURE BODY

Secure the fixture body to the mounted crossbar using provided screws.
Tighten hex nuts (if applicable) to ensure fixture is firmly secured.

STEP 6 — INSTALL ACRYLIC LENS

Position the acrylic lens properly.
Secure with provided screws.


STEP 7 — CCT ADJUSTMENT (IF APPLICABLE)

HALO includes a CCT Adjustable Switch located inside the fixture housing.

Before fully securing the lens:
Select desired color temperature.
Confirm switch position.
Reinstall and secure lens.

STEP 8 — RESTORE POWER

Turn power back on at the circuit breaker.
Verify fixture operates properly.

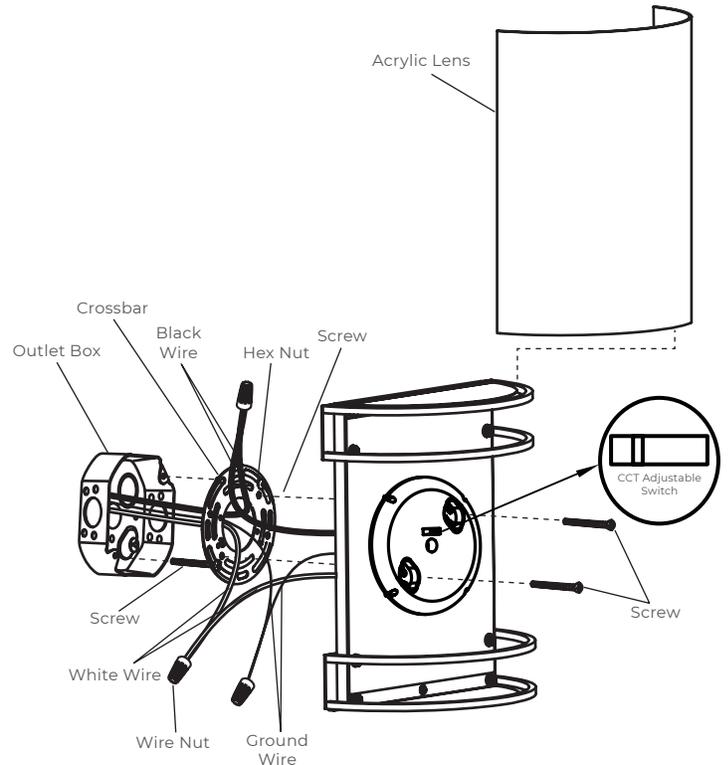

TROUBLESHOOTING


If fixture does not illuminate:

- Confirm breaker is ON.
- Verify wiring connections.
- Ensure CCT switch is properly positioned.
- Confirm supply voltage matches fixture rating.

CARE & MAINTENANCE

- Clean fixture with a soft, dry cloth.
- Do not use abrasive cleaners.
- Ensure power is OFF before servicing.

DIMENSIONS

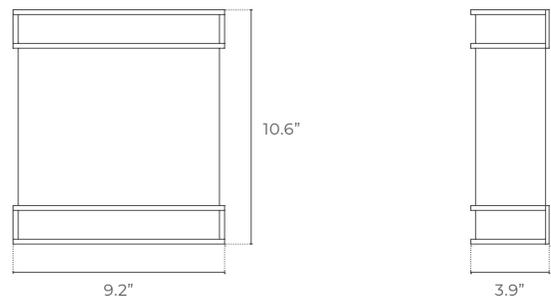

SAVE THESE INSTRUCTIONS

