



IMPORTANT SAFETY PRECAUTIONS

Before you begin, read these instructions completely and carefully.

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire's ventilation by covering with material that will cause luminaire to overheat and potentially shorten the life span.
- Ensure LED luminaire has the correct polarity before installation.




WARNING: To reduce the risk of personal injury or property damage from fire, electrical shock, falling parts, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions.

This product should be installed, inspected and maintained by a qualified and licensed electrician. Installation of luminaire must be in accordance with NEC and local code requirements.


SAVE THESE INSTRUCTIONS




DIMENSIONS

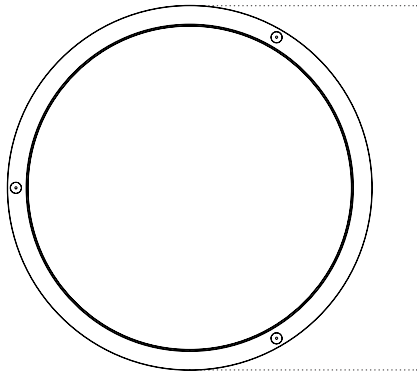


SIZE 12: Ø12"
SIZE 14: Ø14"
SIZE 16: Ø16"



INSTALLATION INSTRUCTIONS

- A)** Tools needed: screwdriver, pliers, wire nuts, electrical tape, and gloves.
- B)** To prevent the possibility of electrical shock, we recommend using rubber sole shoes.
- C)** Take care when handling the fixture to avoid cuts or abrasions. Gloves are recommended.
- D)** Fasten included junction box mounting screws into junction box (approximately two complete rotations).
- E)** Make sure electricity is turned off. Connect green or bare copper wire to ground screw. Connect white wire to white/neutral supply wire and secure with wire nut. Connect black wire to black/hot supply wire and secure with wire nut. For extra security wrap the wire nuts with electrical tape.
- F)** Align the canopy base over the junction box mounting screws so that the screws come through each keyhole slot. Spin the canopy slightly until the screws are at the small end of the keyhole slots. Tighten the mounting screws until the canopy is flush to the ceiling.
- G)** Select the desired color temperature using the CCT dip switch.
- H)** Align the diffuser evenly on canopy, then place the metal ring on diffuser. Align the 3 decorative bars from the canopy with the metal ring. Twist the 3 decorative nuts to tighten the metal ring onto the diffuser and secure the assembly in place.
- I)** Turn power on.
- J)** Installation complete. 

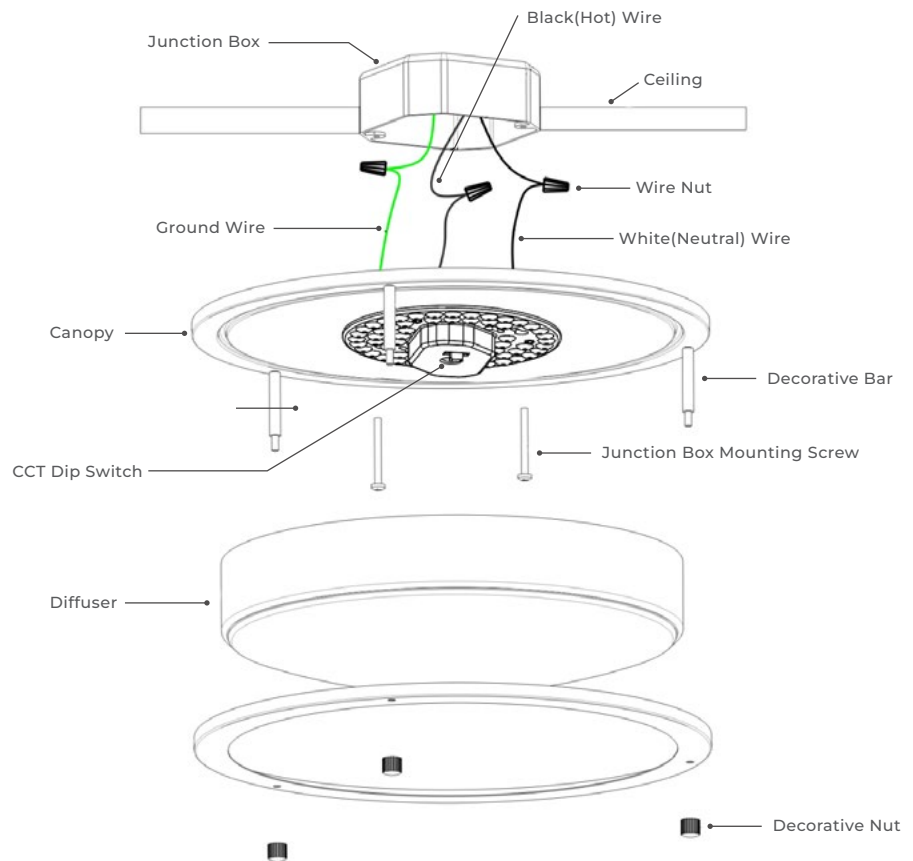

RECOMMENDED DIMMERS

LEVITON MODELS

- 6674
- IPL06
- TBL03

LUTRON MODELS

- CT-600P
- CTCL-153P
- 6333-P
- DVCL-153P
- DLC-03P
- AYCL-153P
- S-600P
- LGCL-153P
- MACL-153MR-WH
- TG-600RP
- SCL-153P

DIMMING NOTE

Triac dimmable and compatible with most dimmers from Lutron and Leviton

SAVE THESE INSTRUCTIONS

