




IMPORTANT SAFETY PRECAUTIONS

Before you begin, read these instructions completely and carefully.

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire’s ventilation by covering with material that will cause luminaire to overheat and potentially shorten the life span.
- Ensure LED luminaire has the correct polarity before installation.

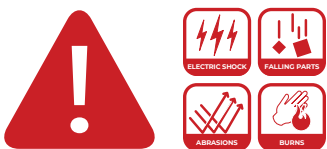


WARNING: To reduce the risk of personal injury or property damage from fire, electrical shock, falling parts, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions.

This product should be installed, inspected and maintained by a qualified and licensed electrician. Installation of luminaire must be in accordance with NEC and local code requirements.


SAVE THESE INSTRUCTIONS

DIMENSIONS

4-Inch

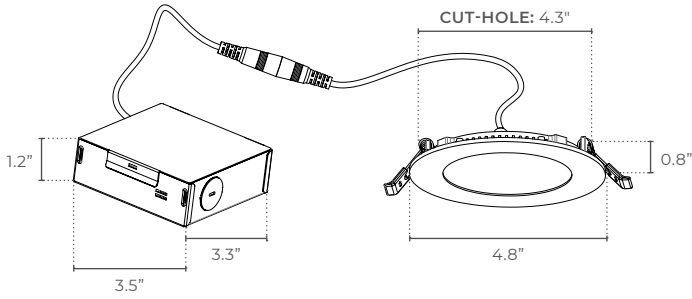


6-Inch

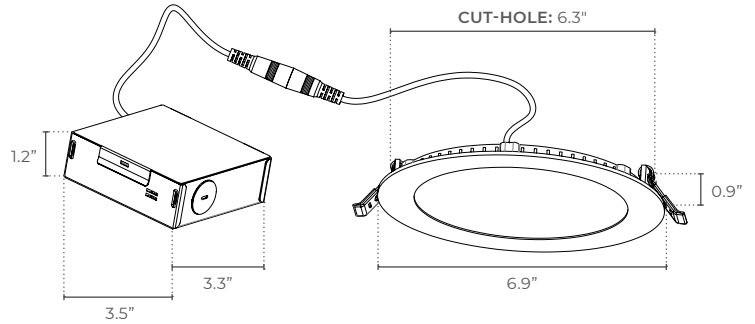

INSTALLATION INSTRUCTIONS

A) Use the circle template provided to measure the size of the hole required for installing the luminaire into the ceiling. See table below for hole sizes. Once hole is measured, cut with suitable tool.





CUT-HOLE


3-Inch	2.9"
4-Inch	4.3"
6-Inch	6.3"
8-Inch	8.2"

B) Open the junction box and remove the 3 wire nuts provided.


WIRE NUTS



C) Use a suitable tool to remove one of the knockout from the side of the junction box.




D) Once the knockout has been removed, insert line voltage supply wires from the circuit through the hole and into the junction box for wiring to the LED driver.




E) Make electrical connections using wire nuts.


N - White
L - Black
G - Ground



F) After connecting wires, close lid on junction box and insert through ceiling hole and place in plenum. Hold spring clips so they are pointed upwards towards the ceiling and push luminaire into the installation hole.

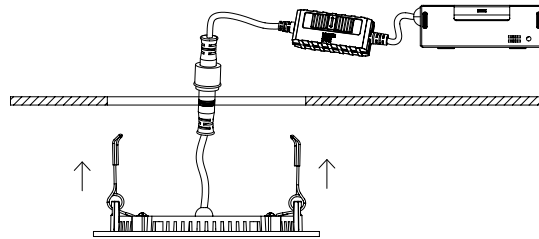

G) Release spring clips and push luminaire so it is flush against the ceiling.

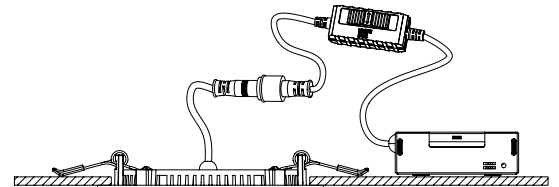

SAVE THESE INSTRUCTIONS