



## IMPORTANT SAFETY PRECAUTIONS

Before you begin, read these instructions completely and carefully.

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire's ventilation by covering with material that will cause luminaire to overheat and potentially shorten the life span.
- Ensure LED luminaire has the correct polarity before installation.




**WARNING:** To reduce the risk of personal injury or property damage from fire, electrical shock, falling parts, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions.

This product should be installed, inspected and maintained by a qualified and licensed electrician. Installation of luminaire must be in accordance with NEC and local code requirements.

**SAVE THESE INSTRUCTIONS**

1


**DIMENSIONS**

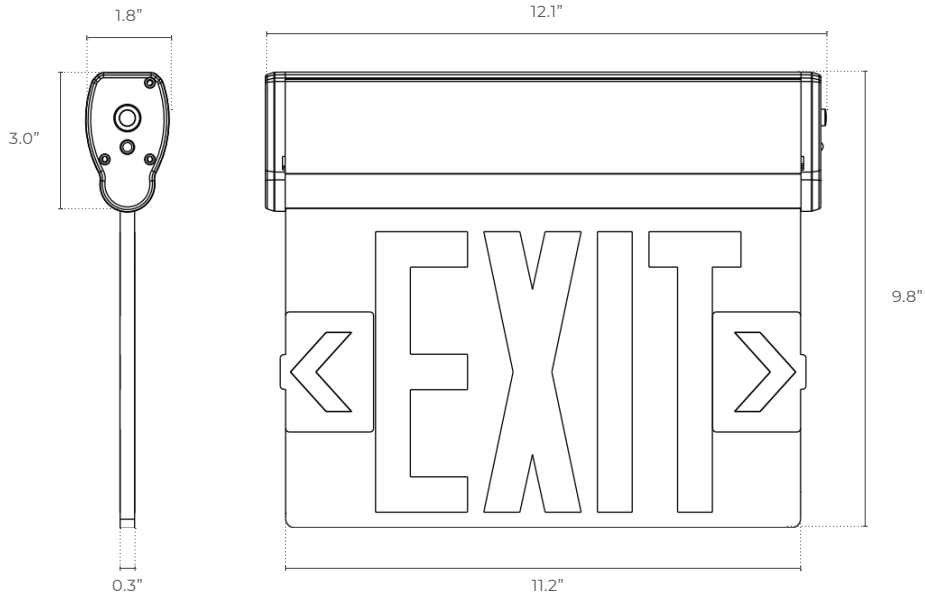


**ELECTRICAL CONNECTIONS**

Make the proper connections

- A) For 120-277VAC, connect the black and white wires to the black and white supply wires.
- B) Connect the green ground wire to the ground supply wire.

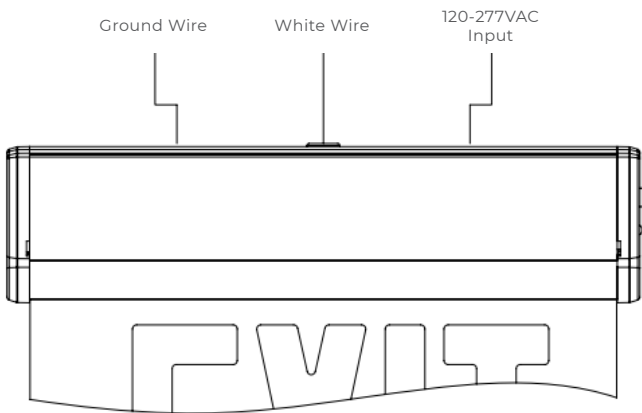

**ASSEMBLY DRAWING**

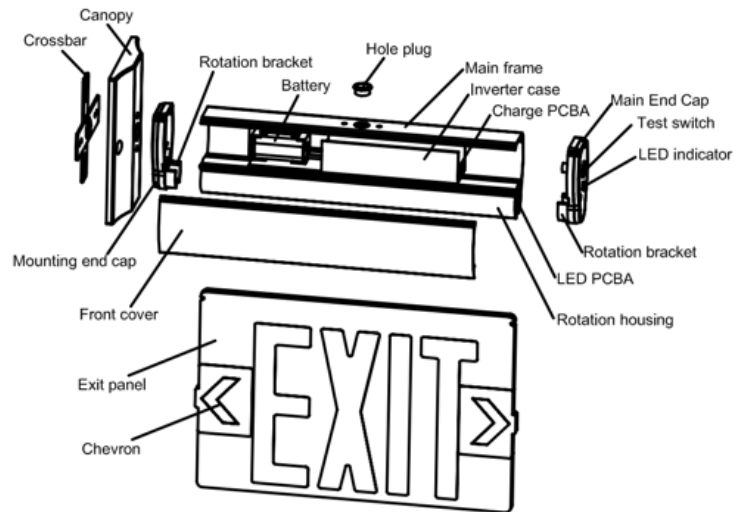

**SAVE THESE INSTRUCTIONS**


**SURFACE CEILING MOUNT INSTALLATION INSTRUCTIONS**

- A) Attach crossbar to junction box using screws if needed. Screws are not provided.
- B) Use screwdriver open front cover to connect battery connector (Figure 1).
- C) Feed AC supply wires through canopy center hole.
- D) Assemble canopy onto main body assembly with (2) PM4\*35 screws(supplied) and make proper wire connections.(See ELECTRICAL CONNECTIONS)
- E) Use (2) PM4-20 screws (supplied) tighten canopy to crossbar (Figure 2).
- F) Insert EXIT panel into main body assembly gently. If EXIT panel is for single face make sure EXIT letter direction is correct (Figure 3).
- G) Determine direction for chevron placement (See DETERMINE DIRECTION).
- H) The unit can be installed on any surface and you may rotate the EXIT panel in any angle from 0° to 180° for ceiling mounting and 90° for wall mounting.


**FIGURE 1**



**FIGURE 2**

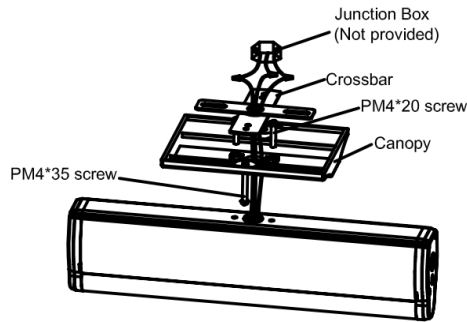


**FIGURE 3**

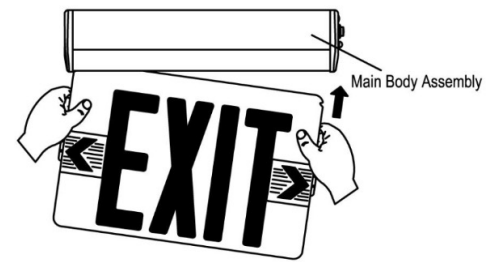


**SURFACE END MOUNT INSTALLATION INSTRUCTIONS**

- A) Attach crossbar to junction box using screws if needed. Screws are not provided.
- B) Use screwdriver open front cover to connect battery connector.
- C) Remove the hole plug from mounting end cap.
- D) Pull out all AC supply wires and feed wires through the center holes of mounting end cap and then canopy (Figure 3).
- E) Reference D-G steps in surface ceiling mount instructions above for completing installation.
- F) The unit can be installed on any surface and you may rotate the EXIT panel from 0° to 180° (Figure 4).

**FIGURE 3**

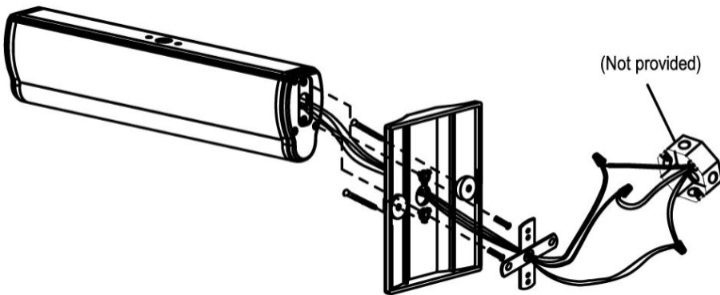

**FIGURE 4**

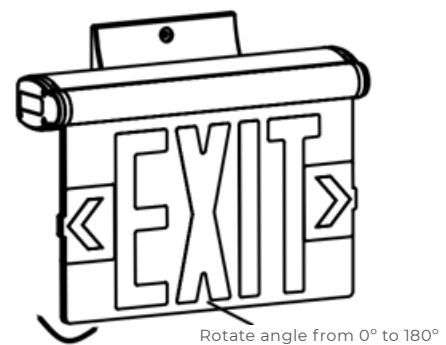

**SAVE THESE INSTRUCTIONS**