

PROJECT
DATE
COMMENTS

IN STOCK

ENERGY CHART

SIZE	LENGTH feet	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
2	2	2300	20	115
3	3	3450	30	115
4	4	4600	40	115
5	5	5750	50	115
6	6	6900	60	115
8	8	9200	80	115

DIMENSIONS

TYPE	LENGTH inches	WIDTH inches	HEIGHT inches
2	23.9	2.8	3.4
3	35.8	2.8	3.4
4	47.4	2.8	3.4
5	59.3	2.8	3.4
6	70.8	2.8	3.4
8	94.1	2.8	3.4

ALL3 ARCHITECTURAL LINEAR LED 3-INCH

The ALL3 series has architectural appeal in a simplified form allowing for versatility with suspended, surface, recessed or wall mounting. ALL3 can be utilized for new construction or retrofit applications and is suitable for damp locations.

- Commercial
- Hospitality
- Hallways & Stairwells
- Industrial

PHYSICAL

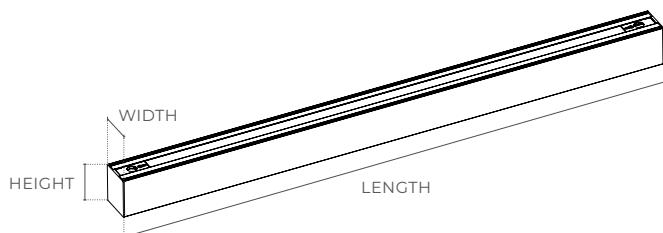
Material	Extruded Aluminum
Mounting	Recessed (Ceiling or Wall), Surface, Suspended, Wall
Lens	Poly碳酸ate
Finish	Matte Black, Matte Gray, Wood, Matte White

PERFORMANCE

Warranty	5 years
Certifications	Damp Location, UL, cULus, DLC
IP Rating	IP20
Rated Life	L70 50,000+ hours
Operating Temperature	-30°C to 40°C (-22°F to 104°F)
CCT	Field Selectable: 3000K, 3500K, 4000K
CRI	80+
Chromaticity	5 Step MacAdams

ELECTRICAL

Wattage	20W, 30W, 40W, 50W, 60W, 80W
Voltage	120-277V
Power Factor	>0.9
Dimmable	0-10V Dimming



SURFACE & SUSPENDED MOUNT ORDERING LOGIC

EX: ALL3-SM-2-DWC-BK

FAMILY	TYPE	SIZE	CEILING	FINISH	OPTIONS
ALL3					
	SM Surface Mount	2 2'	DWC Drywall/Concrete	BK Matte Black	EM Integral Emergency Battery
	SD Suspended Direct	4 4'	TB T-Bar	GR Matte Gray	OS Occupancy Sensor
	SDI Suspended Direct/Indirect	8 8"		WD Wood	
				WH Matte White	

RECESSED MOUNT ORDERING LOGIC

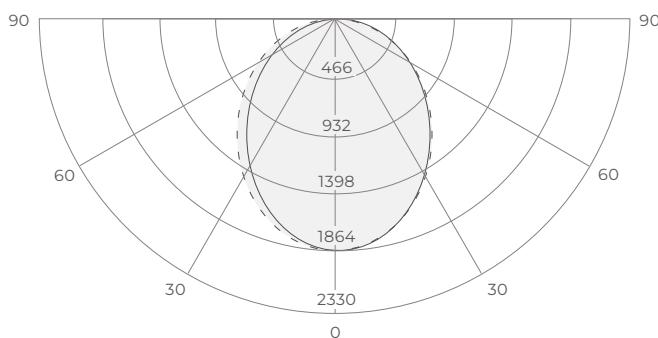
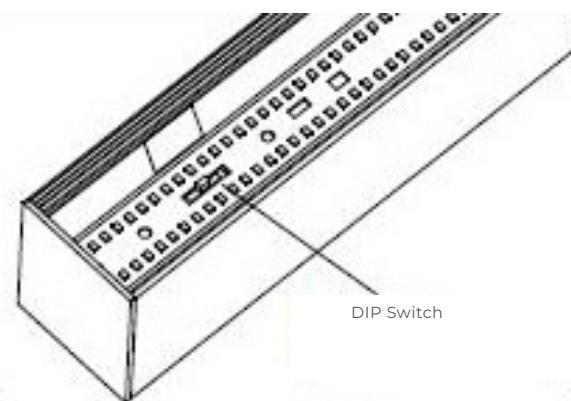
EX: ALL3-RF-2-30-BK





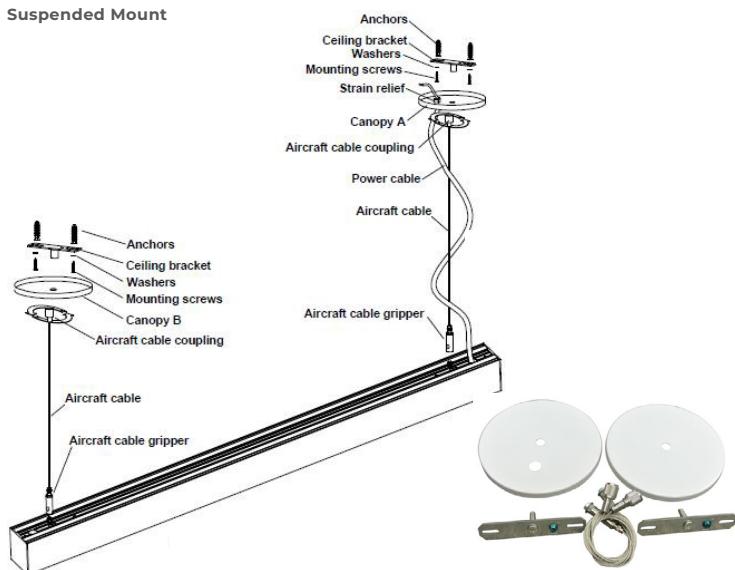
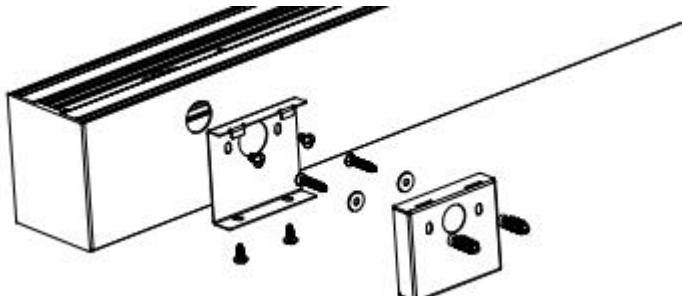
FAMILY	TYPE	SIZE	FINISH	OPTIONS
ALL3	RF			
	RF Recessed Flanged	2 2'	BK Matte Black	EM Integral Emergency Battery
		4 4'	GR Matte Gray	OS Occupancy Sensor
		8 8"	WD Wood	
			WH Matte White	

WALL MOUNT ORDERING LOGIC

EX: ALL3-WMD-2-BK

FAMILY	TYPE	SIZE	FINISH	OPTIONS
ALL3				
	WMD Wall Mount Direct	2 2'	BK Matte Black	EM Integral Emergency Battery
	WMDI Wall Mount Direct/Indirect	4 4'	GR Matte Gray	OS Occupancy Sensor
		8 8"	WD Wood	
			WH Matte White	

PHOTOMETRICS

DIP SWITCH


MOUNTING
Recessed Mount

Flanged

Mud-In Flange
Surface Mount

Drywall / Concrete

T-Bar
Suspended Mount

Wall Mount

ACCESSORIES
Integral Emergency Battery

Occupancy Sensor

SPECIFICATIONS

Universal Input Voltage	100-277VAC - 50-60Hz
AC Input Current	100mA Maximum
Output Power	10W
Emergency Time	≥1.5H
AC Input Power Rating	7.0W Maximum
Output Current & Voltage	200-400mA 25-48Vdc
Battery	Li-Ion - 11.1V/2000mAH

ADDITIONAL IMAGERY

Black Finish



Wood Finish

