

PROJECT  DATE

COMMENTS



**IN STOCK**



**ENERGY CHART**

SIZE	DIAMETER inches	LUMENS	WATTAGE	EFFICACY lm/w
4	4	675	9	75
6	6	960	12	80
8	8	1440	18	80

**RPR RECESSED PANEL ROUND LED**

The RPR Series offers a low-profile, high output recessed mount LED luminaire that meets Energy Star's efficiency standards.

- Residential
- Commercial
- Hospitality

**PHYSICAL**

Material	Die-Cast Aluminum
Mounting	Recessed
Lens	Polycarbonate Diffuser
Finish	White
CCT	Field Selectable 5CCT: 2700K, 3000K, 3500K, 4000K, 5000K
CRI	90+
Beam Angle	120°

**PERFORMANCE**

Warranty	5 years
Certifications	Wet Location, IC Rated, Title 24, CETL Energy Star
Rated Life	L70 50,000 hours
Operating Temperature	-20°C to 40°C (-4°F to 104°F)

**ELECTRICAL**

Wattage	9W, 12W, 18W
Voltage	120V
Power Factor	>0.90
Dimmable	Triac Dimming

**ORDERING LOGIC**


EX: RPR-4

FAMILY	SIZE
<b>RPR</b>	
	4 4"
	6 6"
	8 8"




**DIMENSIONS**


3" Product

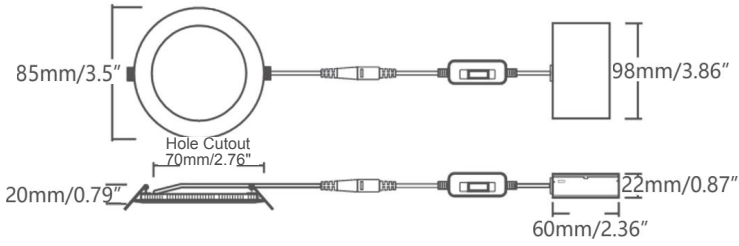


4" Product

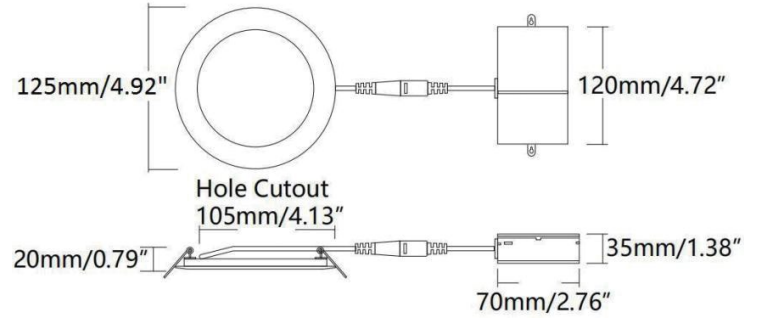


6" Product

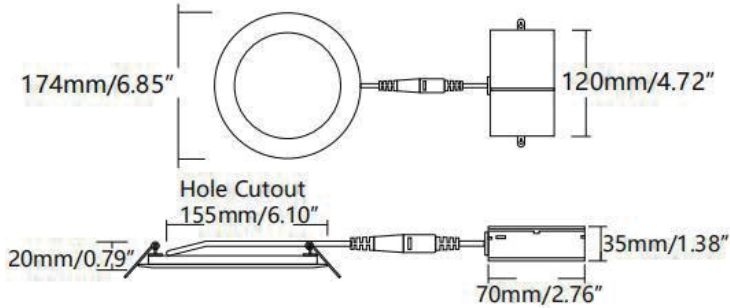

8" Product

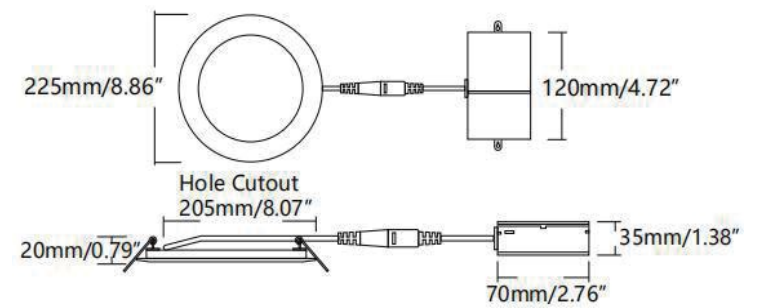

12" Product

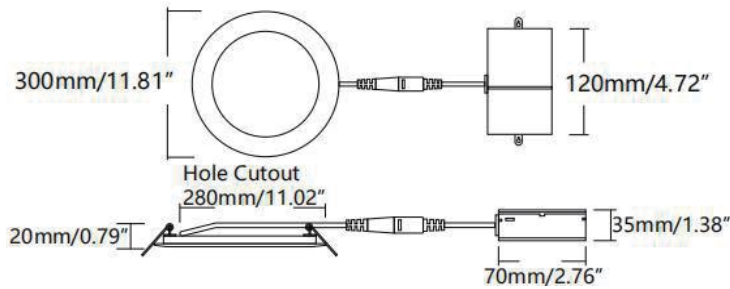

**RECOMMENDED MOUNTING PLATE**

NCP-346 NEW CONSTRUCTION PLATE FOR 3/4/6" DOWNLIGHT

