

PROJECT

DATE

COMMENTS



IN STOCK



ENERGY CHART

SIZE	TOTAL DIAMETER inches	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY lm/w
5	5.5	10	2700K	525	52.5
			3000K	551	55.1
			3500K	596	59.6
			4000K	650	65
			5000K	578	57.8
7	7.5	15	2700K	980	65.3
			3000K	1044	69.6
			3500K	1090	72.7
			4000K	1127	75.1
			5000K	1072	71.5
9	8.9	18	2700K	1042	57.9
			3000K	1129	62.7
			3500K	1214	67.4
			4000K	1240	68.9
			5000K	1179	65.5
11	10.89	22	2700K	2191	99.6
			3000K	2203	100.1
			3500K	2217	100.8
			4000K	2256	102.5
			5000K	2231	101.4
13	12.8.9	24	2700K	2386	99.4
			3000K	2405	100.2
			3500K	2427	101.1
			4000K	2431	101.3
			5000K	2419	100.8

ORDERING LOGIC

EX: SPR-WL-5-FS-WH

FAMILY	SIZE	CCT	FINISH*
SPR-WL		FS	WH
	5 5.5"	FS Field Selectable 2700K / 3000K / 3500K / 4000K / 5000K	WH White
	7 7.5"		
	9 8.9"		
	11 10.89"		
	13 12.8"		

*Additional trim finishes available as a separate accessory attachment, see page 2

SPR-WL SLIM PANEL ROUND LED WET LOCATION

The SPR-WL Series offers a low-profile, high output surface mount LED luminaire that is suitable for wet locations.

- Residential
- Commercial
- Hospitality

PHYSICAL

Mounting	2.75"/3"/4" J-Boxes All Sizes, 5"/6" Cans Sizes 7 & 9 Sizes Only
Finish	Black, Bronze, Brushed Nickel, White

PERFORMANCE

Warranty	5 years
Certifications	Wet Location, Energy Star, Title 24, Meets Section 410.16 of the NEC (NFPA 70-2017)
Rated Life	>50,000 hours
Operating Temperature	-10°C to 50°C (14°F to 122°F)
CCT	Field Selectable: 2700K/3000K/3500K/4000K/5000K
SDCM	≤6
CRI	90
R9	>50
Beam Angle	120°

ELECTRICAL

Wattage	10W, 15W, 18W, 22W, 24W
Voltage	120V
Power Factor	≥0.7
Dimmable	100% - 5% Triac Dimming
THD	<30%

TRIM FINISHES



SEE ACCESSORIES ORDERING LOGIC ON PAGE 2



ACCESSORIES ORDERING LOGIC (ORDER SEPARATELY)

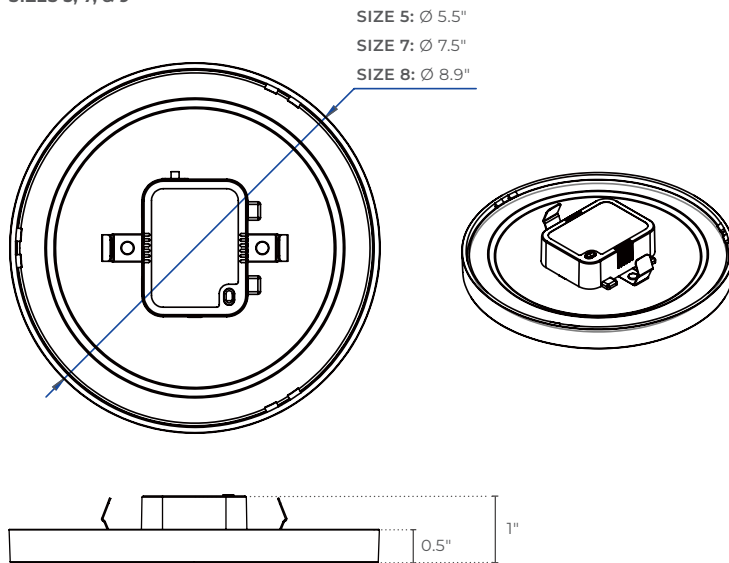
EX: SPR-WL-5-30-BK

TRIM	SIZE	FINISH	EMERGENCY
SPR-WL-TRIM			
	5 5"	BK Black	
	7 7"	BZ Bronze	
	9 9"	BN Brushed Nickel	
	11 11"		
	13 13"		

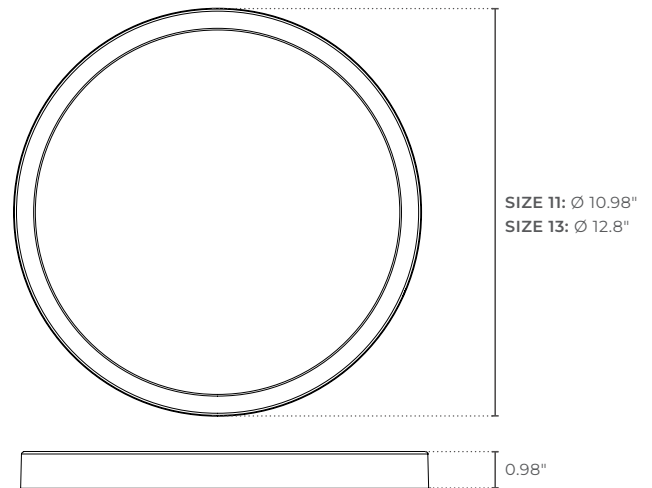
JBEM Junction Box Emergency Backup
MAXIMUM FIXTURE WATTAGE 18W, ONLY COMPATIBLE WITH 5", 7", AND 9"

DIMENSIONS

SIZES 5, 7, & 9



SIZES 11 & 13


RECOMMENDED DIMMERS
LEVITON MODELS

- 6672
- 6674
- DSL06
- RNL06
- IPL06

LUTRON MODELS

- TG-600PR-WH
- S-600PR-WH
- CTCL-153PDH-WH

- TGCL-153PH-LA
- SLV-600P-AL
- DV-600PR-WH

- SCL-153PH-WH
- GT-600P
- DVCL-153P

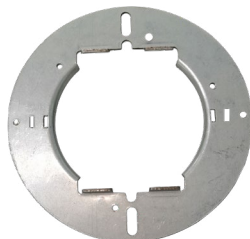
- MSCL-OP153M
- MACL-153M/MA-R
- PD-6WCL

ADDITIONAL IMAGERY

SIZES 5, 7, & 9 BACK



SIZES 5, 7, & 9 MOUNTING BRACKET




SIZES 11 & 13 CCT DIP SWITCH



SIZES 11 & 13 MOUNTING BRACKET

2.75" Junction Box Installation Hole



3.5" Junction Box Installation Hole



TRIMS
SPR-WL-TRIM-5-BK

SPR-WL-TRIM-5-BZ

SPR-WL-TRIM-5-BN

SPR-WL-TRIM-7-BK

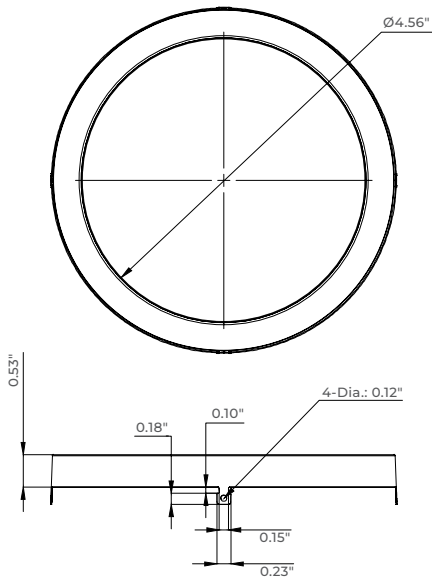
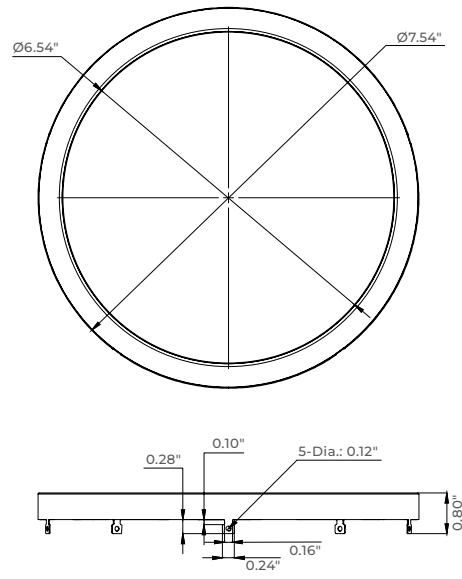
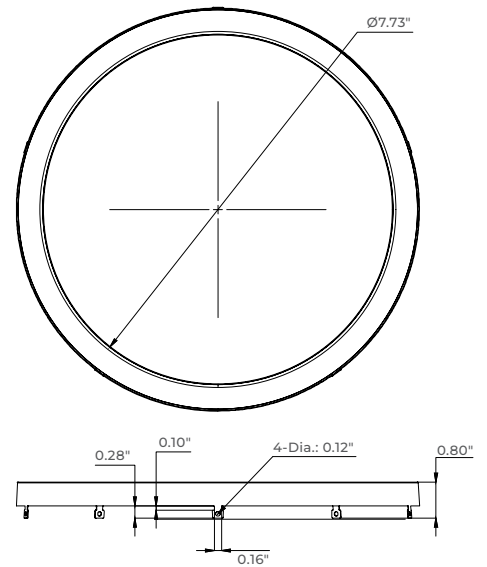
SPR-WL-TRIM-7-BZ

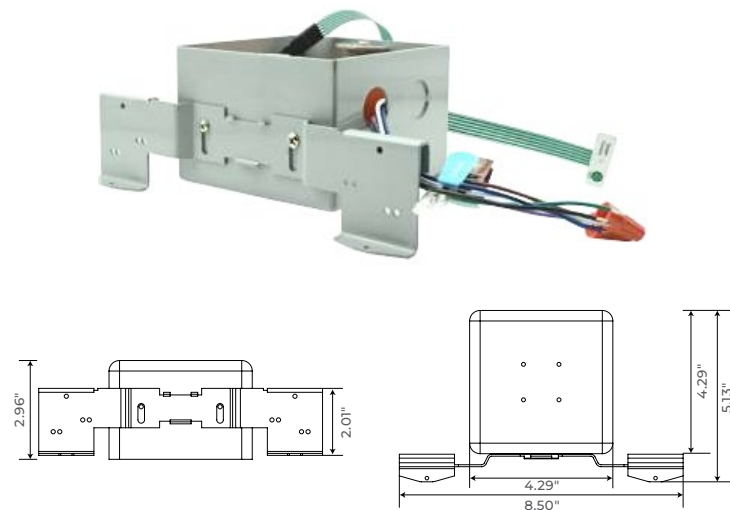
SPR-WL-TRIM-7-BN

SPR-WL-TRIM-9-BK

SPR-WL-TRIM-9-BZ

SPR-WL-TRIM-9-BN

TRIM DIMENSIONS
SPR-WL-TRIM-5

SPR-WL-TRIM-7

SPR-WL-TRIM-9


EMERGENCY SPECIFICATION
JBEM Junction Box Emergency Backup

TECHNICAL SPECIFICATIONS

Wattage	15W
Maximum Fixture Wattage	18W
Input Voltage	AC 120V
Output Voltage	≤ AC 110V
Emergency Time	1.5 hours
Initial Charge Time	24 hours
IP Rating	IP20
Battery Type	Li-ion
Dimensions	8.50" x 5.13" x 2.96" (216 x 130.4 x 75.2mm)
Operating Temp.	41°F – 122°F (5°C–50°C)
Warranty	5 years

Emergency LED Driver

TECHNICAL SPECIFICATIONS

Input Voltage	120V AC, 50/60Hz
Input Current(Max.)	100mA
Input Power(Max.)	≤ 5W
Emergency Time	90 minutes
Charging Time	24 hours
Output Voltage	≤ 110V AC
Warranty	5 years
Adaptive Power	≤ 15W
Battery Type	Li-ion
Ambient Temp.	41°F – 122°F (5°C–50°C)

