



PROJECT DATE

COMMENTS



DISCONTINUED - SOME REMAINING STOCK



ENERGY CHART

HEIGHT inches	DIAMETER inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
6.5	4.3	1000	10	100

ORDERING LOGIC

EX: RWC-G2-27-BK

FAMILY	CCT	FINISH
RWC-G2	FS	<input type="text"/>
FS	Field Selectable 3000K / 4000K / 5000K	<input type="text"/>
BK	Black	<input type="text"/>
BZ	Bronze	<input type="text"/>

RWC-G2 ROUND WALL CYLINDER LED DIRECT GEN 2

The RWC-G2 Series is an outdoor decorative, round, high output wall mount fixture with direct LED light distribution.

- Residential
- Commercial
- Hospitality

PHYSICAL

Material	Die-Cast Aluminum Housing
Mounting	Wall Mount
Lens	Acrylic
Finish	Powder Coated: Black, Bronze

PERFORMANCE

Warranty	5 years
Certifications	Wet Location, UL, cULus, RoHS Compliant
IP Rating	IP65
Rated Life	50,000 hours
Operating Temperature	-40°C to 50°C (-40°F to 122°F)
THD	<20% at full load
CCT	Field Selectable: 3000K/4000K/5000K
CRI	80+
Beam Angle	60°


ELECTRICAL

Wattage	10W
Voltage	110-277Vac
Power Factor	>0.9 at full load




DIMENSIONS

27 CCT OPTION

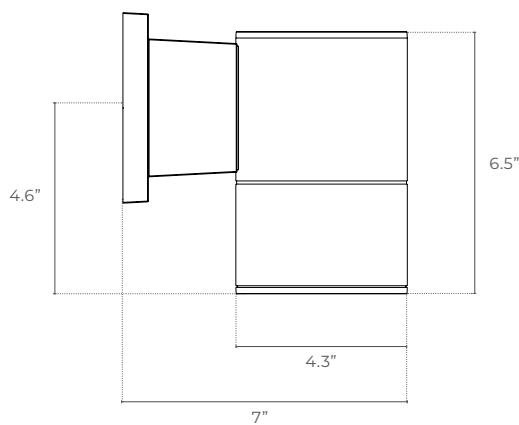

FS CCT OPTION

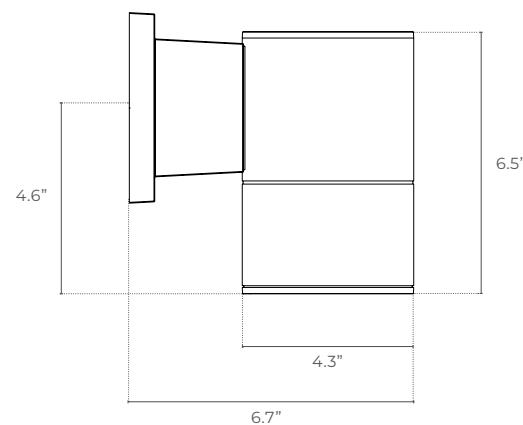
ADDITIONAL IMAGERY
