



IMPORTANT SAFETY PRECAUTIONS

Before you begin, read these instructions completely and carefully.

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire's ventilation by covering with material that will cause luminaire to overheat and potentially shorten the life span.



WARNING: To reduce the risk of personal injury or property damage from fire, electrical shock, falling parts, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions.

This product should be installed, inspected and maintained by a qualified and licensed electrician. Installation of luminaire must be in accordance with NEC and local code requirements.

SAVE THESE INSTRUCTIONS



TOOLS & MATERIALS REQUIRED



Phillips Screwdriver



Wire Cutters/Strippers



Pliers



Wrench



Wire Connectors (Wire Nuts)

- Additional wiring supplies as required by local electrical code
- Silicone sealant (recommended for outdoor installations; not included)

HARDWARE INCLUDED

- A) Mounting screws
- B) Wire connectors
- C) Side mounting screws

(Verify all parts are included before beginning installation.)

INSTALLATION INSTRUCTIONS

STEP 1 — TURN OFF POWER

Turn OFF power at the circuit breaker and verify that power is off at the outlet box.

STEP 2 — INSTALL MOUNTING PLATE

Pull the supply wires out of the outlet box. Secure the mounting plate to the outlet box using the provided mounting screws. Ensure the mounting plate is level and firmly secured.

STEP 3 — MAKE ELECTRICAL CONNECTIONS

Connect fixture wires to supply wires as follows:
Black to Black (Line/Hot)
White to White (Neutral)
Green to Green or Bare Copper (Ground)

Secure all connections with wire connectors. Carefully tuck all wires back into the outlet box.

STEP 4 — SELECT COLOR TEMPERATURE

Before securing the fixture, set the desired color temperature using the built-in CCT selector switch.

Available settings:

- 2700K
- 3000K
- 3500K
- 4000K
- 5000K

STEP 5 — MOUNT FIXTURE

Align the fixture back plate with the mounted wall plate. Secure the fixture using the provided side mounting screws. Ensure the fixture is tight and flush against the wall surface.

STEP 6 — OUTDOOR INSTALLATION (RECOMMENDED)


For exterior applications, apply a continuous bead of silicone sealant (not included) around the top and sides of the fixture where it meets the wall surface. Do not seal the bottom; leave open for drainage.

STEP 7 — RESTORE POWER

Turn power back ON at the breaker and test the fixture.

FINAL CHECK

- Fixture is securely mounted
- All wiring connections are tight
- CCT selection is set properly
- Silicone applied (if outdoors)
- Fixture operates correctly

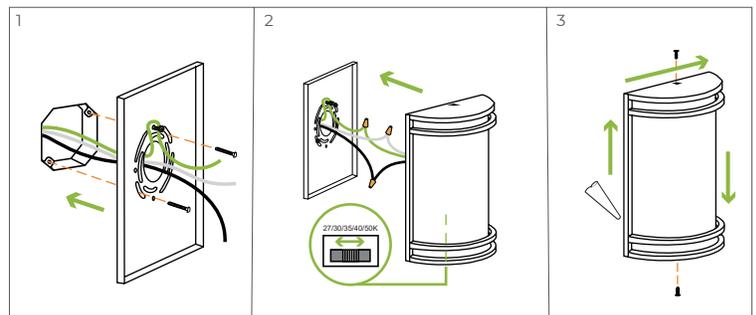


SAVE THESE INSTRUCTIONS




DIMENSIONS

ROUND LENS

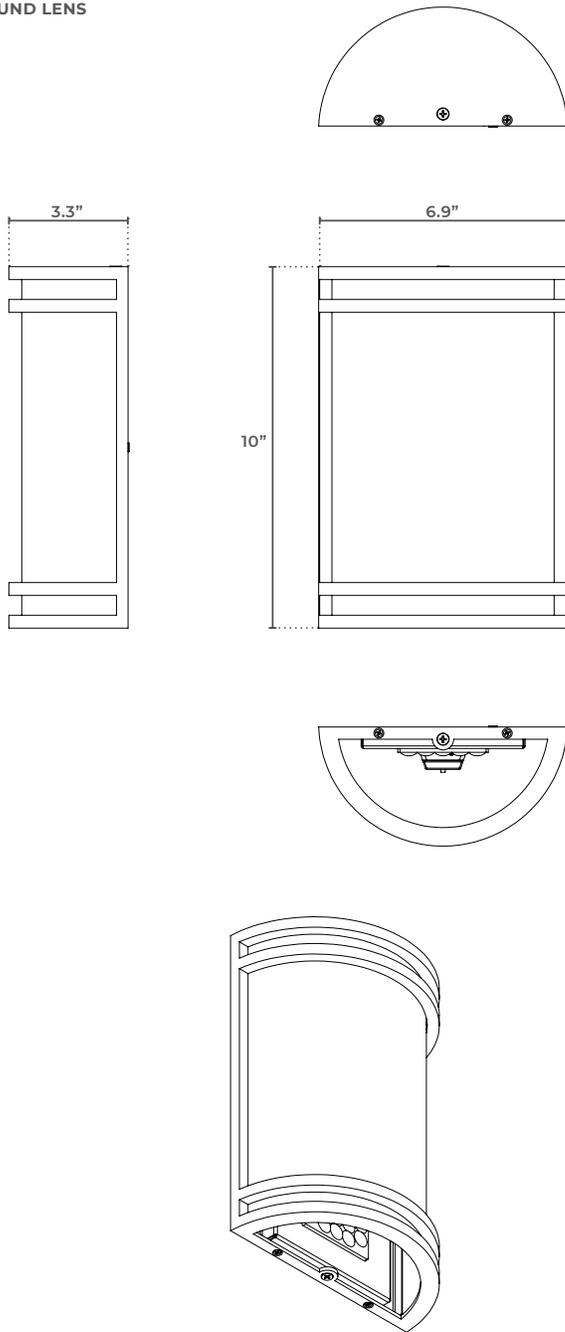

SQUARE LENS

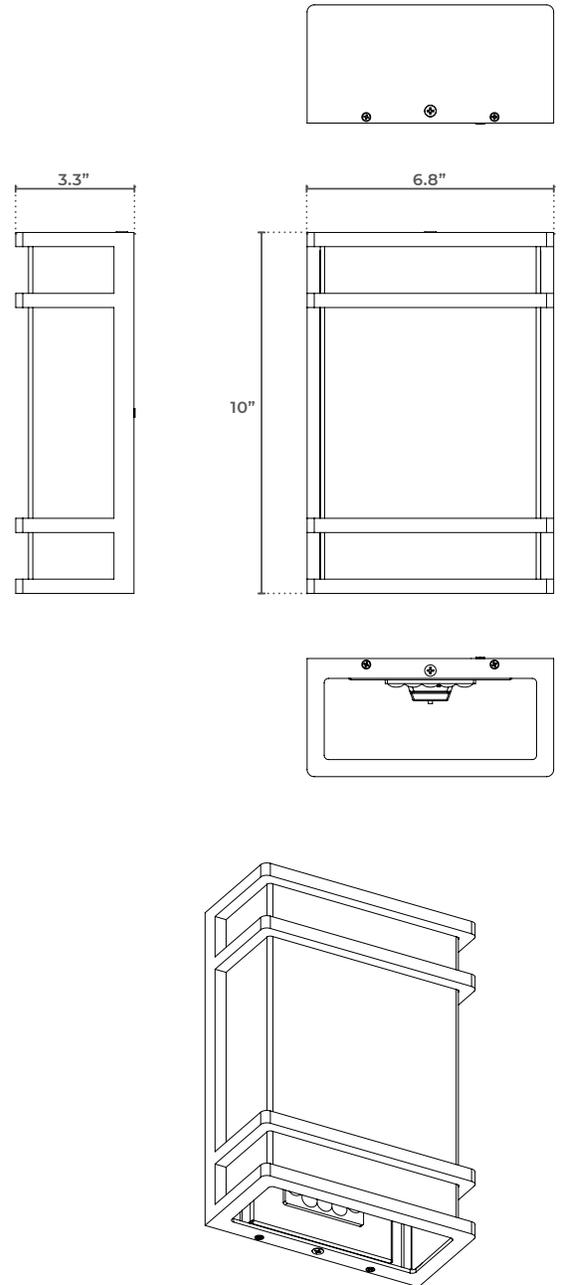

SAVE THESE INSTRUCTIONS




ADDITIONAL IMAGERY

ROUND LENS



SQUARE LENS

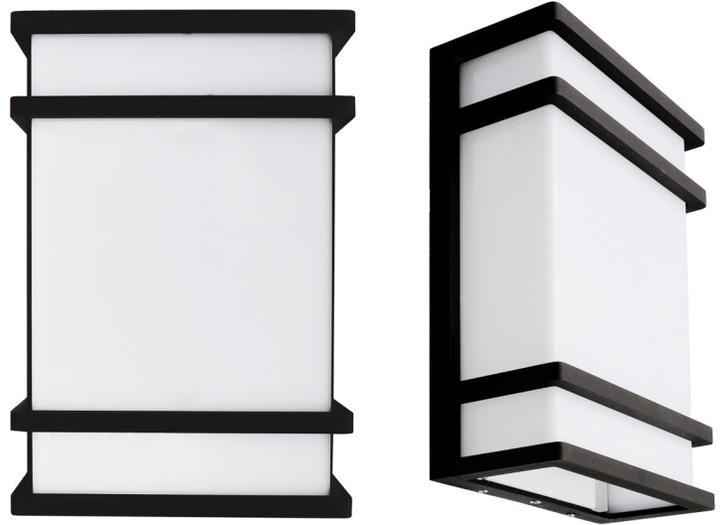

SAVE THESE INSTRUCTIONS

