


PROJECT _____ DATE _____

COMMENTS _____



IN STOCK

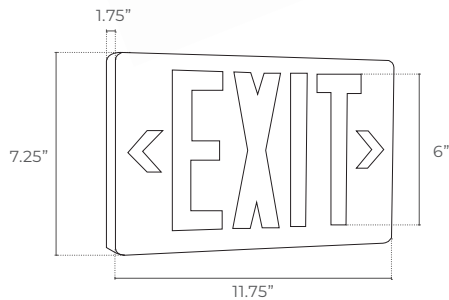

ORDERING LOGIC EX: EX-U-G-AC

FAMILY	FACE COUNT	LETTER COLOR	OPERATION
EX	U		
	U Universal	G Green	AC AC Only
		R Red	EM Emergency (Nickel-Cadmium Battery)

EX THERMOPLASTIC EXIT LED

The EX series is a 120V/277VAC dual voltage thermoplastic exit sign offered with a single, double, or universal face plate and Red or Green LEDs. EX is UL 94V-0 flame rated, damp location listed and includes a test switch and charge indicator. The EX is easy to install with its universal J-box mounting pattern and has a maximum 24-hour full recharge time.

- Residential
- Commercial
- Hospitality

PHYSICAL

Material	Injection-Molded Thermoplastic ABS Housing
Mounting	Universal J-Box Mounting Pattern
Finish	White
Source	LED
Face Count	Single, Double or Universal (Single/Double)
Letter Color	Green or Red (6" Height, 3/4" Stroke)

PERFORMANCE

Warranty	5 years for fixture housing & 2 years for battery
Certifications	Damp Location, cULus, UL 94V-0 Flame Rating, CEC Title 20 Compliant, FCC, DOE
IP Rating	IP20
Operating Temperature	0° to 40° C (32° to 104° F)

ELECTRICAL


Voltage	120V/277VAC Dual Voltage
Wattage	AC - 1.9W, EM - 1.8W
Battery	1.2V Nickel Cadmium 90-Minutes Emergency Operation

ORDERING LOGIC - STOCK EX: EX-D-G-AC


FAMILY	STOCK OPTIONS
EX	
	D-R-AC Double Face, Red Letter Color, AC Only
	S-R-AC Single Face, Red Letter Color, AC Only
	D-G-AC Double Face, Green Letter Color, AC Only
	S-G-AC Single Face, Green Letter Color, AC Only



DIMENSIONS

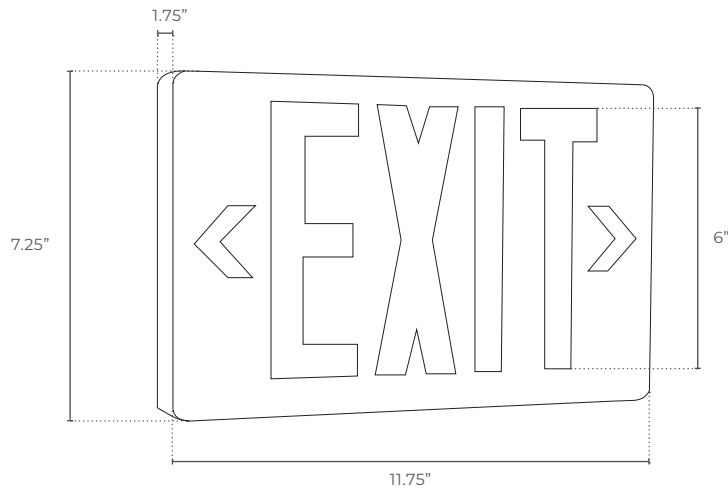


Mounting Canopy

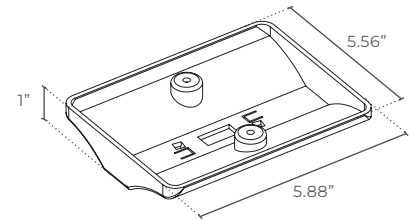


MOUNTING TYPE

Wall Mount



Side Mount



Ceiling Mount

