CANDELA LIGHTING

PROJECT


DATE

COMMENTS

5-YEAR WARRANTY · 0-10V DIMMING · cULus · DLC PREMIUM · FC

IN STOCK







CP-QS CANOPY LED QUICK SHIP

CP-QS is a high output energy efficient LED canopy light with field selectable wattage and CCT that can replace 80-250W metal halide or high pressure sodium fixtures. The heavy die-cast aluminum housing is anti-corrosion and rust proof with a robust powder coated bronze finish. CP-QS features a built in receptacle port for installing a plug and play motion sensor.

- Parking Garage
- Canopy
- Tunnels

PHYSICAL

Material	Die-Cast Aluminum
Mounting	Surface Mount or ¾" Conduit Entry for Pendant Mount (Pendant Stem By Others)
Lens	Polycarbonate
Finish	Bronze Powder Coat
Source	Lumileds LEDs

PERFORMANCE

Warranty	5 years
Certifications	cULus, DLC Premium, FCC
Rated Life	L70 50,000 hours
Operating Temperature	-20°C to 45°C (-4°F to 113°F)
CCT	Field Selectable: 3000K/4000K/5000K
CRI	80+
Beam Angle	150°

ENERGY CHART

HEIGHT inches	WIDTH inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
2.73	10.0	7200	60	120
		9600	80	120
		12000	100	120

ELECTRICAL

Wattage	Field Selectable: 60W/80W/100W
Voltage	120-277V
Power Factor	0.90
Dimmable	0-10V

ORDERING LOGIC


EX: CP-QS-FS-BZ

FAMILY	CCT	FINISH	OPTIONS
CP-QS	**FS**	**BZ**	
	FS Field Selectable 3000K / 4000K / 5000K	**BZ** Bronze	**(blank)** No Motion Sensor
			MS Motion Sensor Included

CANDELA LIGHTING


CP-QS CANOPY LED QUICK SHIP

DIMENSIONS

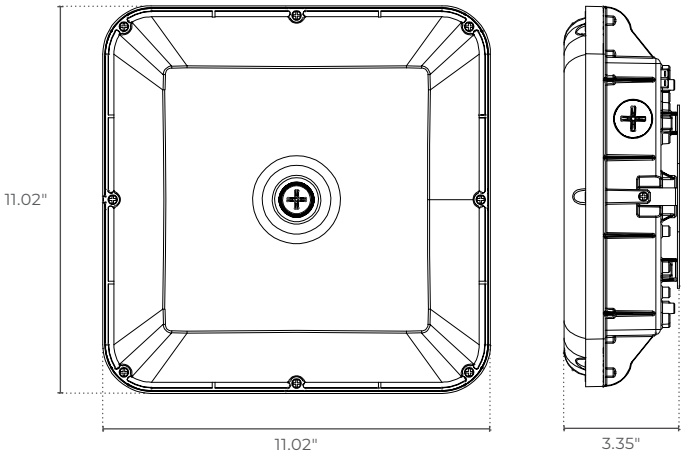


FIELD SELECTABLE FUNCTIONALITY






PHOTOMETRICS - CP-QS-40W

AVERAGE BEAM ANGLE (50%): 150.0°

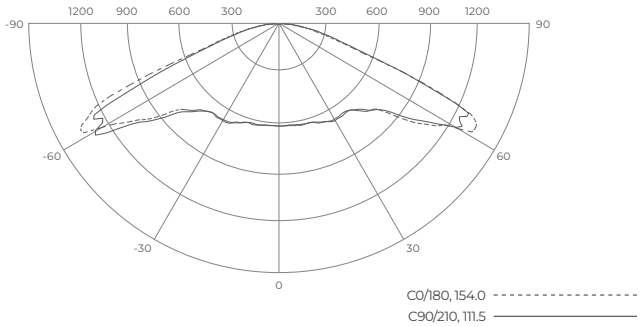


PHOTOMETRICS - CP-QS-60W

AVERAGE BEAM ANGLE (50%): 150.0°

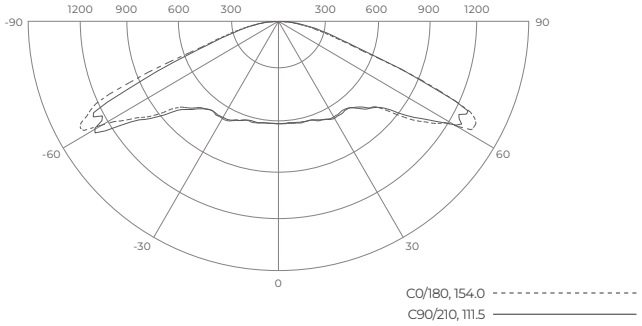

PHOTOMETRICS - CP-QS-80W

AVERAGE BEAM ANGLE (50%): 150.0°

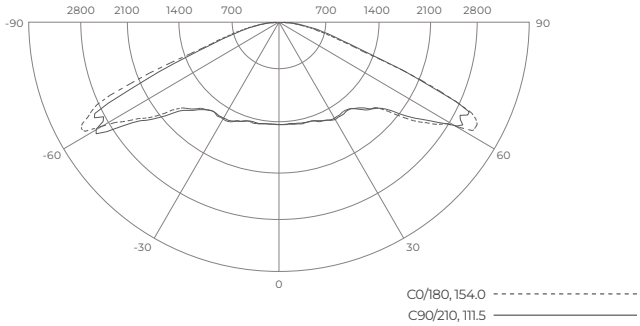

SPECIFICATIONS AND DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTIFICATION. CONTACT SAGE BRANDS FOR UP TO DATE DETAILS.
CANDELA LIGHTING - A DIVISION OF SAGE BRANDS · **CANDELA.LIGHTING** | SAGE BRANDS · **SAGE.LIGHTING**