

PROJECT

DATE

COMMENTS

RoHS  
Compliant

IP20

**PHYSICAL**

Mounting	3M Adhesive
Cut Length	Varies, See Back
Maximum Run	16' 4"

**PERFORMANCE**

Warranty	5 years
Certification	UL, CUL, CE, RoHS Approved
IP Rating	IP20
Dimming	Universal (See Recommended Drivers)
CCT	1800K, 2200K, 2700K, 3000K, 3500K, 4000K, 5000K, 6000K
CRI	90+

**ELECTRICAL**

Voltage	24V DC Constant Voltage Output
---------	--------------------------------

**APPLICATIONS**

Cove & Perimeter Lighting
Architectural Back Lighting
Walls & Surfaces
Stairs & Walkways
Decorative Signage
Channel Letters

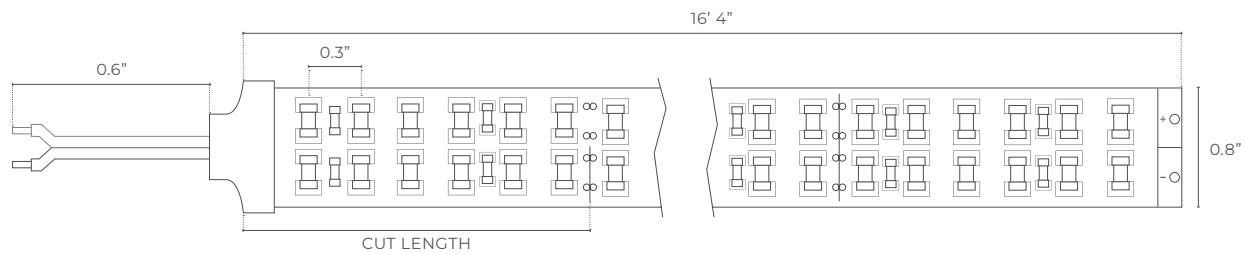

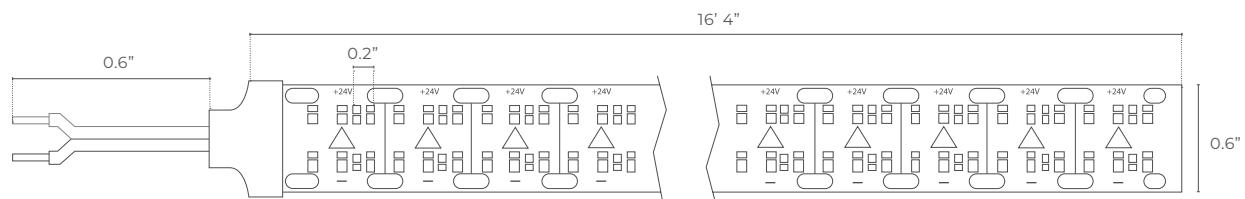
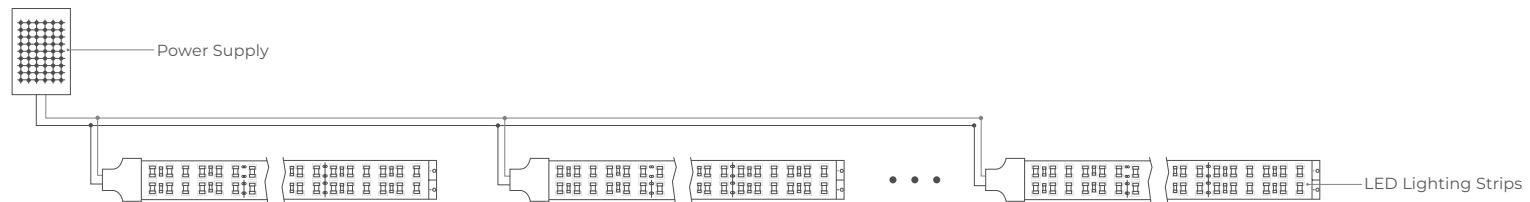
**ENERGY CHART**

TYPE	CCT		POWER w/ft	LUMENS/FT	EFFICACY lm/w
	2700K	5000K			
SW-2X-9	3000K	5000K	8.8	872	100
	3500K				
	4000K	6000K			
	1800K	3500K			
SW-2X-12	2200K	4000K	11.7	1018	87
	2700K	5000K			
	3000K	6000K			

**ORDERING LOGIC**

EX: SW-2X-9-27-ST

FAMILY	TYPE	POWER	CCT		LENGTH
			SW	2X	
SW	2X	9	8.8W/ft	SW-2X-9	ST
2X	Dual Row	12	11.7W/ft	27 2700K	16'; Cut in Field
				18 1800K	STANDARD
				30 3000K	22 2200K
				35 3500K	27 2700K
				40 4000K	30 3000K
				50 5000K	35 3500K
				40 4000K	
				50 5000K	
				60 6000K	

**DIMENSIONS**
**SW-DR-9**

**SW-DR-12**

**CONNECTION DRAWINGS OF SINGLE COLOR**


**RECOMMENDED DRIVERS**
**D-60W**

60W Constant Voltage LED Driver 5 In 1 Dimming Function


**D-96W**

96W Constant Voltage LED Driver 5 In 1 Dimming Function


**D-60W-ND**

60W Constant Voltage LED Driver Non-Dimming


**D-300W**

300W Constant Voltage LED Driver 5 In 1 Dimming Function

