

PROJECT 

 DATE 

 COMMENTS 

**IN STOCK**

**ENERGY CHART**

| FINISH               | HEIGHT<br>inches | WIDTH<br>inches | DELIVERED<br>LUMENS | WATTAGE | EFFICACY<br>lm/w |
|----------------------|------------------|-----------------|---------------------|---------|------------------|
| White                | 2.9              | 4.8             | 110                 | 3W      | 36.7             |
| Silver, Sand         | 2.9              | 4.8             | 80                  | 3W      | 26.7             |
| Oil-Rubbed<br>Bronze | 2.9              | 4.8             | 55                  | 3W      | 18.3             |
| Black                | 2.9              | 4.8             | 55                  | 3W      | 18.3             |

**ORDERING LOGIC**

EX: SLHR-27-BK

| FAMILY      | CCT                                       | FINISH                       |
|-------------|---|------------------------------|
| <b>SLHR</b> |   |                              |
| <b>27</b>   | 2700K                                     | <b>BK</b> Black              |
| <b>30</b>   | 3000K                                     | <b>ORB</b> Oil-Rubbed Bronze |
| <b>40</b>   | 4000K                                     | <b>SD</b> Sand               |
| <b>50</b>   | 5000K                                     | <b>SL</b> Silver             |
| <b>FS3</b>  | Field Selectable<br>3000K / 4000K / 5000K | <b>WH</b> White              |

**SLHR STEP LIGHT HORIZONTAL RECESSED LED**

SLHR is a horizontal recessed LED step light ideal for new construction applications where low level glare free path lighting is desired. SLHR mounts to standard junction boxes, is wet location listed, and IP65 rated. SLHR is offered in four finishes and multiple CCTs including a field selectable 3CCT option.

- Residential
- Hospitality
- Commercial

**PHYSICAL**

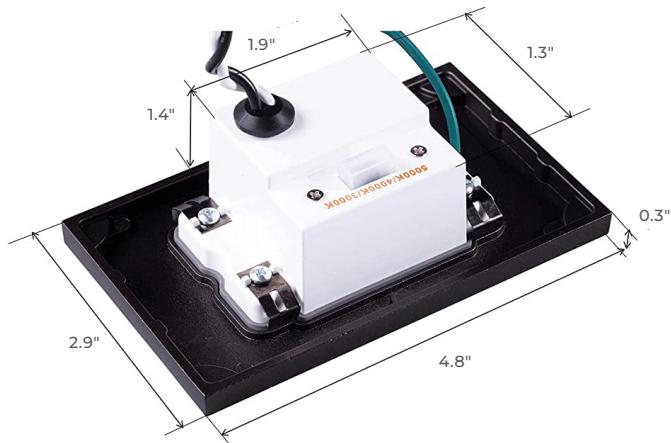
|          |   |
|----------|---|
| Material | Die Cast Aluminum                                 |
| Mounting | Recessed Wall — mounts to standard junction boxes |
| Lens     | Polycarbonate                                     |
| Finish   | Black, Oil-Rubbed Bronze, Sand, Silver, White     |

**PERFORMANCE**

|                       |  |
|-----------------------|--|
| Warranty              | 5 years  |
| Certifications        | Wet location, ETL, FCC, RoHS                                       |
| IP Rating             | IP65   |
| Rated Life            | 30,000 hours   |
| Operating Temperature | -20°C to 40°C (-4°F to 104°F)                                      |
| CCT                   | 2700K, 3000K, 4000K, 5000K,<br>Field Selectable: 3000K/4000K/5000K |
| CRI                   | 90+  |
| Beam Angle            | 90°  |

**ELECTRICAL**

|              |                       |
|--------------|-----------------------|
| Wattage      | 3W                    |
| Voltage      | 120V                  |
| Power Factor | >0.9                  |
| Dimmable     | Triac Dimming 100-10% |

**DIMENSIONS**

**ACCESSORIES**


Wire Nuts x3



Screws x4



Mounting Bracket x1

**ADDITIONAL IMAGERY**


White Finish



Sand Finish



Oil-Rubbed Bronze Finish


**PHOTOMETRICS**

AVERAGE BEAM ANGLE (50%): 96.2°

