

PROJECT

COMMENTS

DATE



IN STOCK


ENERGY CHART

FAMILY	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
BR10	3120	24	130

ORDERING LOGIC

EX: BR10-FS

FAMILY	CCT
BR10	FS

FS Field Selectable
 3000K / 4000K / 5000K

BR10 BOLLARD LED

The BR10 Series offers a durable, corrosion resistant, die-cast aluminum housing in a powder coat bronze finish with field selectable CCT, zero uplight, and a Type V distribution.

- Residential
- Commercial
- Hospitality

PHYSICAL

Material	Aluminum
Mounting	Ground Cage
Lens	Polycarbonate
Finish	Bronze

PERFORMANCE


Warranty	5 years
Certifications	Wet Location, cULus, DLC
Rated Life	50,000 Hours
Operating Temperature	-40°F to 104°F (-40°C to 40°C)
CCT	Field Selectable 3CCT: 3000K/4000K/5000K
CRI	80+
Distribution	Type V

ELECTRICAL

Wattage	24W
Voltage	120-277V
Dimmable	1-10V
Power Factor	≥0.9
THD	≤20%



DIMENSIONS

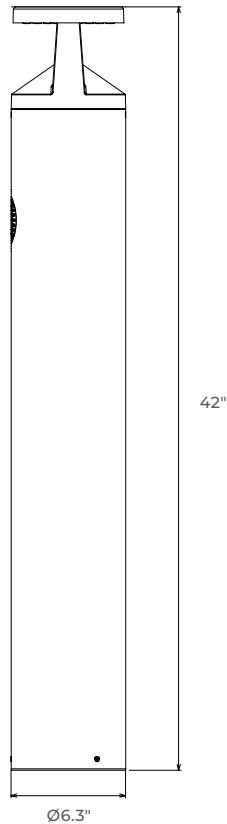

ADDITIONAL IMAGERY

Round Detail



Anchor Bolt Install



Dip Switch for Field Selectable CCT

