

PROJECT

DATE

COMMENTS

RoHS
Compliant

IN STOCK



ENERGY CHART

HEIGHT inches	WIDTH inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
4.7	2.9	160	3.5W	46

ORDERING LOGIC

EX: SLVR-27-BK

FAMILY	CCT	FINISH
SLVR		
	27 2700K	BK Black
FS3	Field Selectable 3000K / 4000K / 5000K	ORB Oil-Rubbed Bronze
		WH White

SLVR STEP LIGHT VERTICAL RECESSED LED

SLVR is a vertical recessed LED step light ideal for new construction applications where low level glare free path lighting is desired. SLVR mounts to standard junction boxes, is wet location listed, and IP65 rated. SLVR is offered in three finishes and multiple CCTs including a field selectable 3CCT option.

- Residential
- Hospitality
- Commercial

PHYSICAL

Material	Die Cast Aluminum
Mounting	Recessed Wall — mounts to standard junction boxes
Lens	Polycarbonate
Finish	Black, Oil-Rubbed Bronze, White



PERFORMANCE

Warranty	5 years
Certifications	Wet Location, ETL, CE, RoHS
IP Rating	IP65
Rated Life	50,000 hours
Operating Temperature	-20°C to 40°C (-4°F to 104°F)
CCT	2700K, Field Selectable: 3000K/4000K/5000K
CRI	>90
Beam Angle	40°

ELECTRICAL

Wattage	3.5W
Voltage	120V
Power Factor	>0.9
Dimmable	Triac Dimming 100-10%

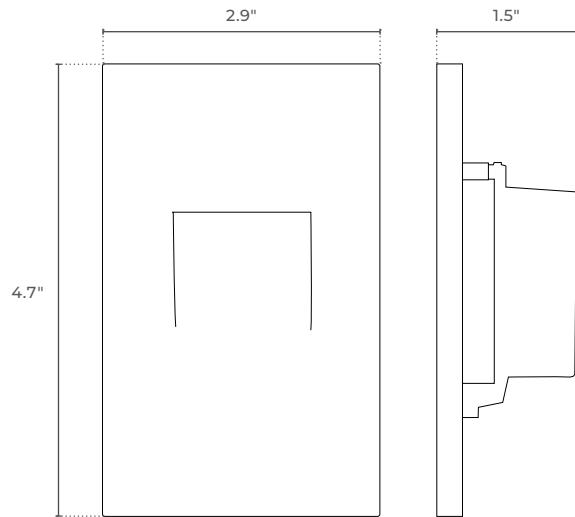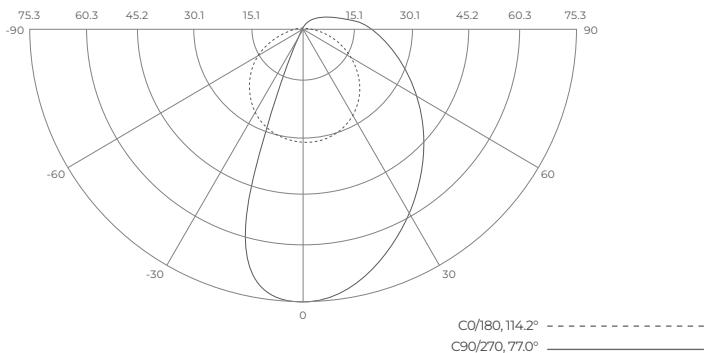

DIMENSIONS

PHOTOMETRICS
AVERAGE BEAM ANGLE (50%): 95.6°

ADDITIONAL IMAGERY
