

PROJECT

DATE

COMMENTS



PHYSICAL

Material	Steel
Mounting	Surface
Lens	PMMA Diffuser
Finish	White
Source	LED

PERFORMANCE

Warranty	5 years
Certification	ETL, RoHS Compliant, Title 24, FCC
Rated Life	L70 50,000 hours
CCT	Field Selectable 5CCT: 2700K/3000K/3500K/4000K/5000K
CRI	90+

ELECTRICAL

Wattage	15W, 20W, 26W, 35W
Voltage	Size 12, 14, 16: 120V Size 16HO: 120-277V
Power Factor	>0.90
Dimmable	Size 12, 14, 16: Triac Size 16HO: Triac at 120V, 0-10V at 120-277V



ENERGY CHART

SIZE Inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
12	1000	15	70
14	1400	20	70
16	1800	26	70
16HO	3000	35	86


ORDERING LOGIC

EX: CAP-12-FS5-90


FAMILY	SIZE	CCT	CRI
CAP		FS5	90
	12 12", 15W	FS5 Field Selectable 2700K / 3000K / 3500K / 4000K / 5000K	90 90+
	14 14", 20W		
	16 16", 26W		
	16HO 16", 35W		

DIMENSIONS


SIZE 12

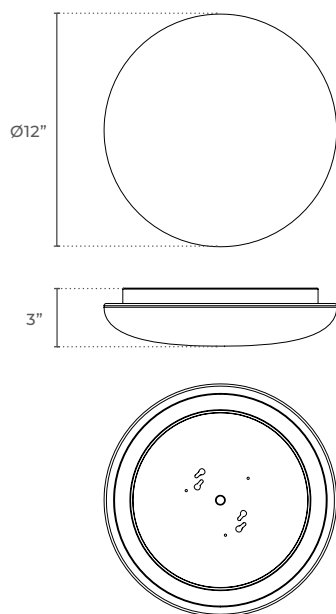

SIZE 14

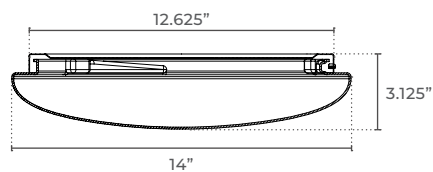

SIZE 16

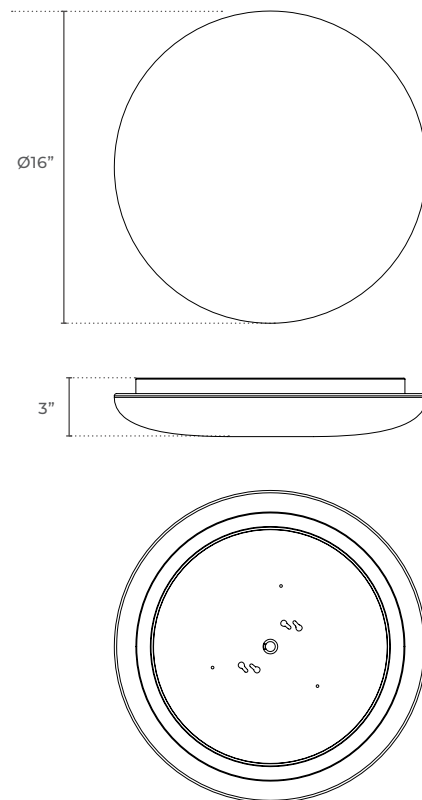

ADDITIONAL IMAGERY

SIZE 12



SIZE 14



SIZE 16

