

PROJECT

DATE

COMMENTS



IN STOCK

PHYSICAL

Material	Metal Back Plate
Mounting	Surface
Lens	Polystyrene
Finish	Black or Brushed Nickel
Source	LED
CCT	Single CCT, Field Selectable 3CCT or Field Selectable 5CCT: 2700K, 3000K, 3500K, 4000K, 5000K
CRI	80+ or 90+

PERFORMANCE

Warranty	5 years
Certification	Damp Location, ETL, Energy Star
Rated Life	L70 50,000 hours


ELECTRICAL

Wattage	15W, 20W, 25W
Voltage	120V
Power Factor	>0.90
Dimmable	Yes

ORDERING LOGIC

EX: BARS-12-FS5-90-BK

FAMILY	DIAMETER	CCT	CRI	FINISH
BARS		FS5	90	
	12 12"	FS5 Field Selectable 2700K / 3000K / 3500K / 4000K / 5000K	90 90+	BK Black
	14 14"			BN Brushed Nickel
	16 16"			

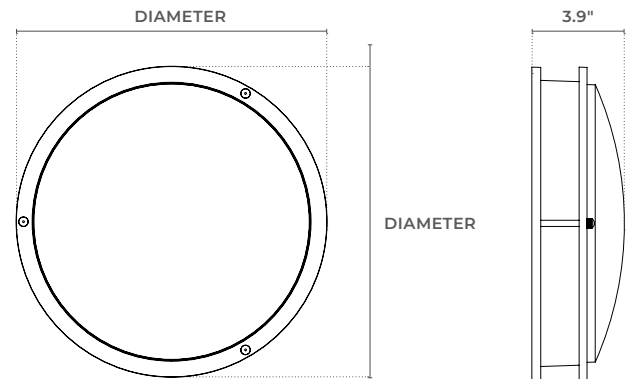

ENERGY CHART

DIAMETER inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
12	1100	15	73.3
14	1500	20	75
16	1900	25	76

RECOMMENDED DIMMERS

LEVITON MODELS

- 6674
- IPL06
- TBL03

LUTRON MODELS

- CT-600P
- CTCL-153P
- 6333-P
- DVCL-153P
- DLC-03P
- AYCL-153P
- S-600P
- LGCL-153P
- MACL-153MR-WH
- TG-600RP
- SCL-153P

ORDERING LOGIC - STOCK

EX: BARS-16-FS3-80-BK

FAMILY	STOCK
BARS	
16-FS3-80-BK	16", 3CCT: 30K/40K/50K, 80CRI, Black
14-30-90-BN	14", 3000K, 90CRI, Brushed Nickel
14-FS3-80-BK	14", 3CCT: 30K/40K/50K, 80CRI, Black
14-30-80-BN	14", 3000K, 80CRI, Brushed Nickel
16-30-80-BN	16", 3000K, 80CRI, Brushed Nickel

