

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_

COMMENTS \_\_\_\_\_



## 6WC-DIM FAN AND LIGHT WALL CONTROL

6WC-DIM is a combo fan speed and light kit dimmer wall control that pairs with the KIWI, CIRRUS, MESOS, BLAZE, FOG, IBIS, MALLARD, and JAY ceiling fans. Functions include 6-speed motor settings, on/off fan control, on/off LED light kit control, dimming for LED light kit, direction of fan, and on/off control for the power supply (both the fan motor and LED light kit). This control also includes a memory function where the status of the fan speed and direction is saved when the power supply is turned off. When the power supplied is turned on again the previous saved setting is reloaded. The default setting for the LED light kit when turning on the power supply is full brightness.

- Residential
- Commercial
- Hospitality

### PERFORMANCE

Warranty	2 years
Certification	ETL
Max Distance from Fan Receiver	30ft

### ELECTRICAL

Voltage	120V
---------	------

### COMPATIBLE FANS

KIWI CEILING FAN LED	CIRRUS CEILING FAN
IBIS CEILING FAN LED	MESOS CEILING FAN LED
MALLARD CEILING FAN E26	

### ORDERING LOGIC


EX: 6WC-DIM

FAMILY

**6WC-DIM**




DIMENSIONS

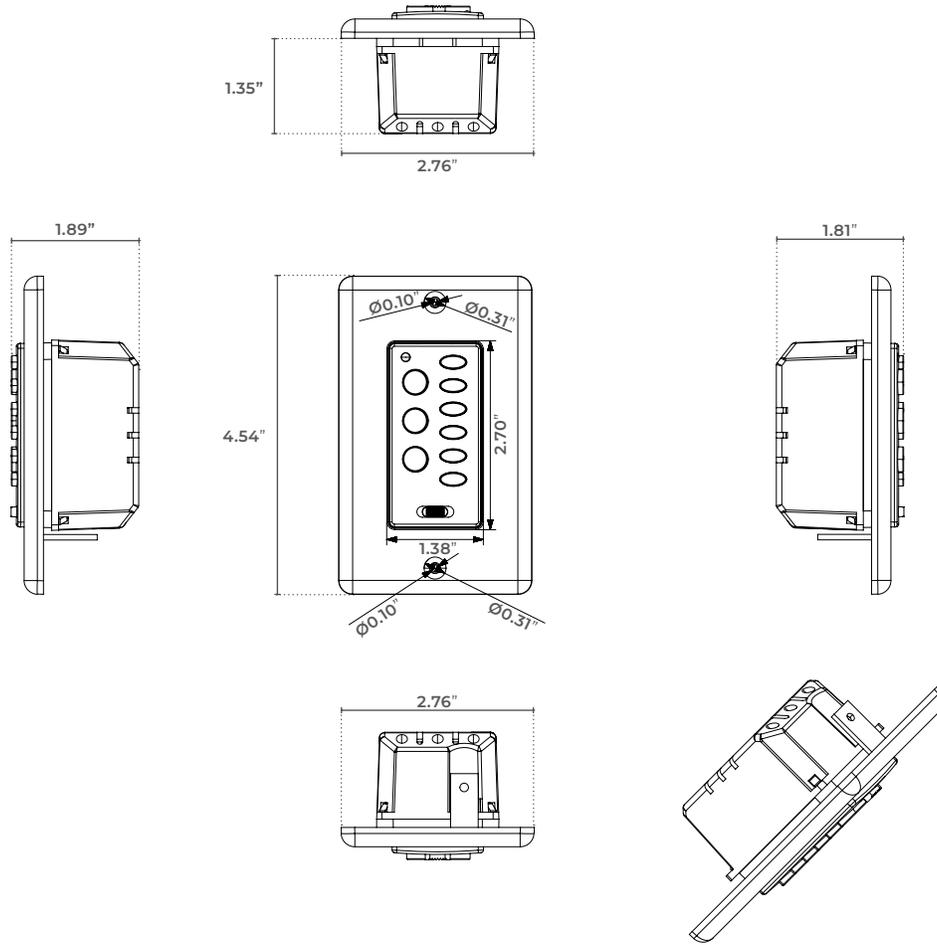

WALL CONTROL FUNCTIONS

1. LED Indicator Light
2. ON/OFF for fan
3. Short Press: ON/OFF for light  
Long Press (hold for 5 seconds): Dimmer
4. Direction of the fan (Reverse Switch)
5. Fan Speed Settings
6. OFF for power supply (fan and light)
7. ON for power supply (fan and light)

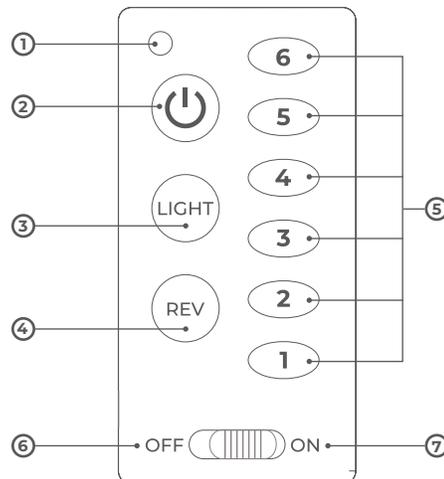

**WIRING DIAGRAM**

Max distance from 6WC-DIM wall control to the fan receiver is 30ft due to internal transmitter inside wall control.

