

PROJECT

DATE

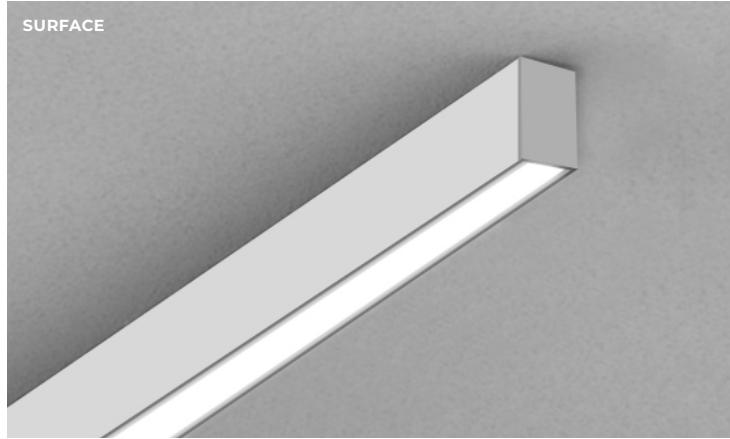
COMMENTS



PENDANT



SURFACE



PENDANT MOUNT ENERGY CHART

WIDTH	LENGTH	WATTAGE	DISTRIBUTION	DELIVERED LUMENS 3500K	EFFICACY
1.3	2	20	DI	2100	105
			D	1800	90
	4	40	DI	4200	105
			D	3600	90
8	80	80	DI	8400	105
			D	7200	90

SUMMIT 13 ARCHITECTURAL LINEAR LED

Summit is a sleek, streamlined architectural linear LED luminaire combining modern aesthetics with exceptional lighting quality. Summit 13 has a 1.3" wide profile that can be pendant or surface mounted in a black or white finish. Summit 13 is available in 2ft, 4ft, and 8ft lengths with 3500K or 4000K and the pendant version is available in a direct or direct/indirect distribution.

- Commercial Office
- Classrooms
- Civic & Transportation

PHYSICAL

Material	Extruded Aluminum
Mounting	Pendant, Surface
Optics	Diffuser
Finish	Black, White

PERFORMANCE

Warranty	5 years
Certifications	Damp Location, cULus
Rated Life	50,000 hours
THD	<20%
CCT	3500K, 4000K
CRI	80+

ELECTRICAL

Wattage	20W, 40W, 80W
Voltage	100-277V
Power Factor	>0.9
LED Driver	Class 2 High Efficiency
Dimming	1-10V


SURFACE MOUNT ENERGY CHART

WIDTH	LENGTH	WATTAGE	DELIVERED LUMENS 3500K	EFFICACY
1.3	2	20	1800	90
	4	40	3600	90
	8	80	7200	90

PENDANT MOUNT ORDERING LOGIC

EX: SUMMIT-13-P-2-20-UNV-35-DF-DI-BK-F

FAMILY	SIZE	MOUNTING	LENGTH	WATTAGE	VOLTAGE	CCT	OPTIC	DISTRIBUTION
SUMMIT	13	P			UNV		DF	
	13 1.3"	P Pendant	2 2'	20 20W	UNV 110-277V	35 3500K	DF Diffuser	DI 75% Direct / 25% Indirect
			4 4'	40 40W		40 4000K		D 100% Direct
			8 8'	80 80W				

FINISH **CEILING TYPE**


BK Black **F** 9/16" or 15/16" Flat
WH White **S** 9/16" Slot
D Drywall

ACCESSORIES (ORDER SEPARATELY)


EX: SUMMIT-13-P-EM

FAMILY	ACCESSORIES
SUMMIT-13-P	
	EM 8W Emergency Battery

SURFACE MOUNT ORDERING LOGIC

EX: SUMMIT-13-S-2-20-UNV-35-DF-D-BK-F

FAMILY	SIZE	MOUNTING	LENGTH	WATTAGE	VOLTAGE	CCT	OPTIC	DISTRIBUTION
SUMMIT	13	S			UNV		DF	D
	13 1.3"	S Surface	2 2'	20 20W	UNV 110-277V	35 3500K	DF Diffuser	D 100% Direct
			4 4'	40 40W		40 4000K		
			8 8'	80 80W				

FINISH **CEILING TYPE**


BK Black **F** 9/16" or 15/16" Flat
WH White **S** 9/16" Slot
D Drywall

ACCESSORIES (ORDER SEPARATELY)

EX: SUMMIT-13-S-EM

FAMILY	ACCESSORIES
SUMMIT-13-S	
	EM 8W Emergency Battery

SPECIFICATIONS
OPTICS

Diffuser lens: 100% direct distribution for surface mounting. Choose between 100% direct or 75% direct/25% indirect for pendant mounting.

CONSTRUCTION

Extruded aluminum housing

FINISH

Powder coat white or black finish

ELECTRICAL

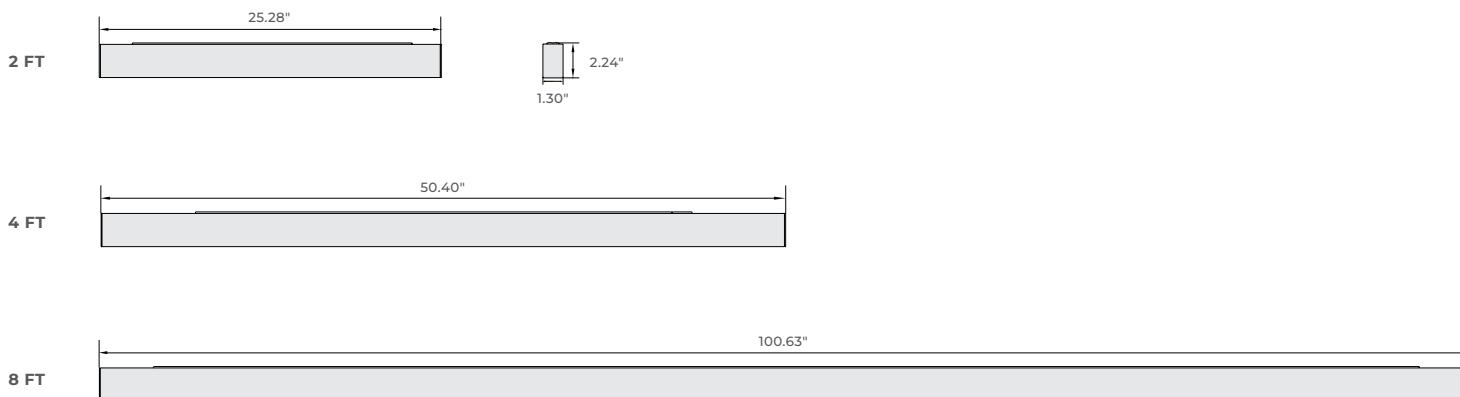
LED Driver: Class 2 high efficiency LED driver with 1-10V continuous dimming to 10% that works with many types of controls. Compatible with the following types of controls:

- Leviton IP710-DL
- Leviton IP710-LF
- Lutron PowPak 0-10V Dimming
- Lutron Diva-Dvtv
- Hubbell NX Distributed Room Control
- Cooper Greengate Room Controller
- nLight nPP16D
- Wattstopper DLM

THD: <20%

Power Factor: >0.9

Input Voltage: 100-277V

DIMENSIONS

MOUNTING

- Pendant or surface mount

LED SYSTEM

CRI: Minimum 80 color rendering index.

CCT: Choose between 3500K and 4000K.

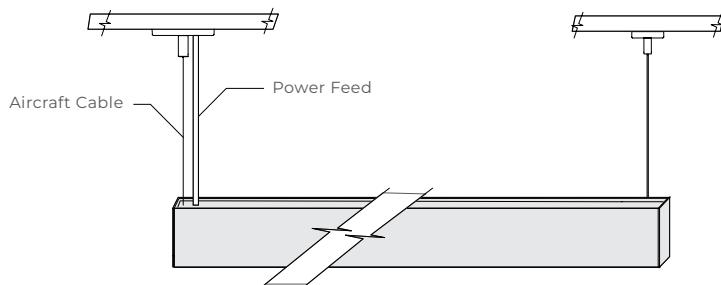
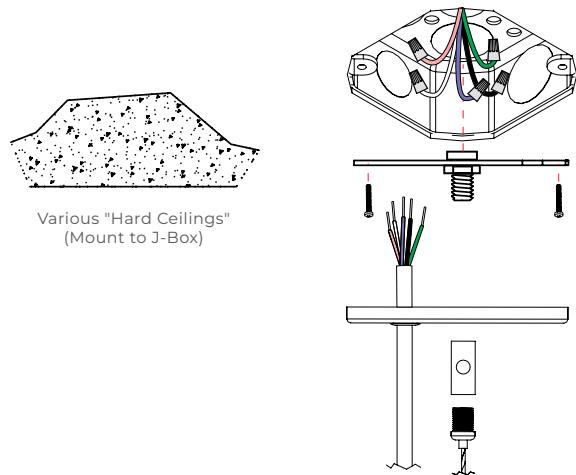

LED: Rated life is 50,000 hours with 87.8% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.

APPROVALS


- cULus listed for damp locations
- 5 years limited warranty

OPTIONAL FUNCTION


Emergency Option: Optional 100-277V emergency LED driver for lighting up to 120 minutes in event of power failure, meets critical life-safety lighting requirements.

MOUNTING
INDIVIDUAL

DRYWALL CEILING / OFF GRID

DROP CEILING / ON GRID



9/16" Flat Ceiling



9/16" Step Ceiling



15/16" Flat Ceiling



15/16" Step Ceiling

