


PROJECT _____ DATE _____

COMMENTS _____

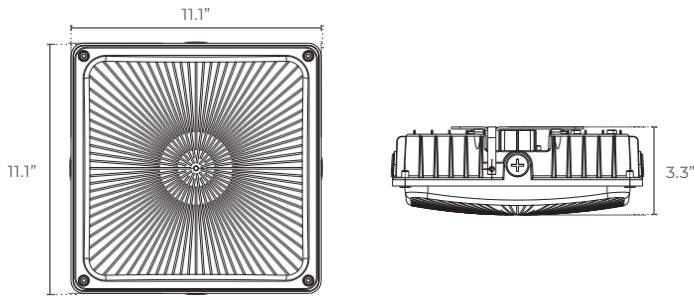

ENERGY CHART

SIZE	HEIGHT inches	WIDTH inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
1	11.1	3.3	4800	40	120
			6000	50	120
			9000	75	120

CP CANOPY LED

The CP series is intended for new construction applications, can be surface mounted or pendant mounted, and is IP65 rated and wet location listed.

- Parking Garage
- Canopy
- Tunnels

PHYSICAL

Material	Die-Cast Aluminum
Mounting	Surface & Pendant
Lens	Polycarbonate
Finish	Black, Bronze, White
CCT	2700K, 3000K, 4000K, 5000K, 5700K
CRI	70+
Beam Angle	120°

PERFORMANCE

Warranty	5 years
Certifications	Wet Location, ETL, CETL, DLC Listed
IP Rating	IP65
Rated Life	>100,000hours
Operating Temperature	-40°C to 50°C (-40°F to 122°F)

ELECTRICAL

Wattage	40W, 50W, 75W
Voltage	120-277V
Power Factor	>0.90
Dimmable	0-10V

ORDERING LOGIC

EX: CP-40-27-SM-BK

FAMILY	WATTAGE	CCT	MOUNTING	FINISH	OPTIONS
CP	40	27	SM	BK	D
	40W	2700K	Surface STANDARD	Black	1-10V Dimming
	50	30	P	BZ	OS
	50W	3000K	Pendant	Bronze	Occupancy Sensor
	75	40		WH	EM
	75W	4000K		White	Integral EM Battery
		50			OSBL(XX)
	5000K			Bi-Level Occupancy Sensor <small>(XX=10, 30, OR 50%) FACTORY PROGRAMMED TO DESIGNATE UNOCCUPIED OUTPUT % (ie. OSBL30)</small>	
	57			MB	
	5700K			Mounting Bracket	