


PROJECT \_\_\_\_\_ DATE \_\_\_\_\_

COMMENTS \_\_\_\_\_



**IN STOCK**

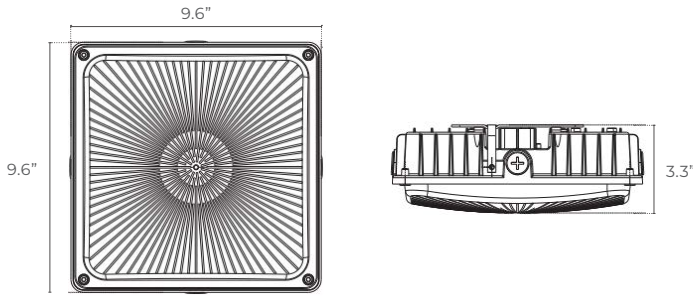

**ENERGY CHART**

HEIGHT inches	WIDTH inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
11.1	3.3	4800	40	120
		6000	50	120
		9000	75	120

**ORDERING LOGIC**

EX: CP-40-30

FAMILY	WATTAGE	CCT	OPTIONS
<b>CP</b>			
<b>40</b>	<b>40W</b>	<b>30</b> 3000K	<b>D</b> 1-10V Dimming
<b>50</b>	<b>50W</b>	<b>40</b> 4000K	<b>OS</b> Occupancy Sensor
<b>75</b>	<b>75W</b>	<b>50</b> 5000K	<b>EM</b> Integral EM Battery
<b>57</b>	<b>5700K</b>	<b>OSBL(XX)</b>	Bi-Level Occupancy Sensor <small>(XX=10, 30, OR 50%) FACTORY PROGRAMMED TO DESIGNATE UNOCCUPIED OUTPUT % (ie. OSBL30)</small>

**CP CANOPY LED**

The CP series is intended for new construction applications, includes provisions for surface and pendant mounting, and is IP65 rated and wet location listed.

- Parking Garage
- Canopy
- Tunnels

**PHYSICAL**

Material	Die-Cast Aluminum
Mounting	Surface & Pendant (3/4" NPT Stem Provided by Others)
Lens	Polycarbonate
Finish	Bronze

**PERFORMANCE**

Warranty	5 years
Certifications	Wet Location, cETLus
IP Rating	IP65
Rated Life	>100,000hours
Operating Temperature	-40°C to 50°C (-40°F to 122°F)
Dimmable	0-10V
CCT	3000K, 4000K, 5000K, 5700K
CRI	70+
Beam Angle	120°

**ELECTRICAL**

Wattage	40W, 50W, 75W
Voltage	120-277V
Power Factor	>0.90

**ACCESSORIES ORDERING LOGIC (ORDER SEPARATELY)**

EX: CP-MB

FAMILY	ACCESSORIES
<b>CP</b>	
<b>MB</b>	Mounting Bracket <small>PROVIDED WITH STANDARD FIXTURE</small>

