


CYRO CYLINDER ROUND OUTDOOR LED

The CYRO Series is a round LED cylinder that can be surface mounted or suspended, offers a wide variety of finish options, and has a CRI of over 90.

- Black or White Finish
- Black, Silver, or White Reflector
- 20° or 40° Beam Angle

PROJECT _____ DATE _____

COMMENTS _____

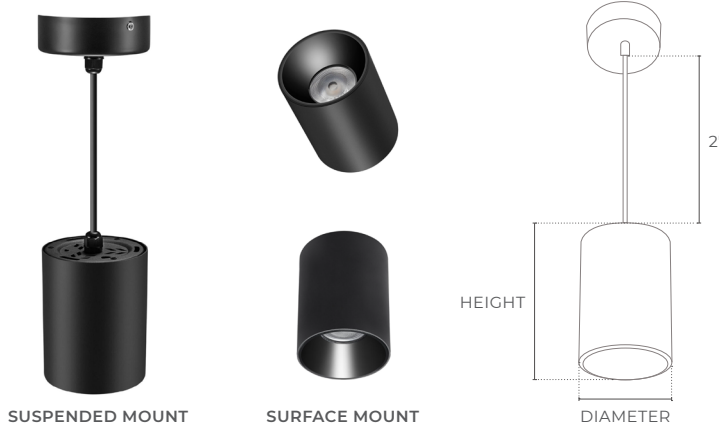

PHYSICAL

| | |
|-----------------|----------------------------|
| Material | Aluminum |
| Mounting | Surface or Suspended |
| Reflector Color | Black, Silver, White |
| Finish | Black or White |
| CCT | 2700K, 3000K, 4000K, 5000K |
| CRI | 90+ |
| Beam Angle | 20°, 40° |

PERFORMANCE

| | |
|----------------|--------------------------|
| Warranty | 5 years |
| Certifications | CETL, CE, RoHS Compliant |
| IP Rating | IP65 |
| UGR | <12 |

ELECTRICAL

| | |
|--------------|----------------------------------|
| Wattage | 8W, 15W, 20W, 30W, 40W, 50W, 55W |
| Voltage | 100-277V |
| Power Factor | >0.95 |
| Dimmable | On/Off, Triac, 0-10V |

ENERGY CHART

| SIZE | HEIGHT inches | WIDTH inches | LUMENS | WATTAGE | EFFICACY lm/w | MOUNTING |
|------|---------------|--------------|--------|---------|---------------|-----------|
| 1 SM | 6.0 | 4.5 | 2400 | 30 | 80 | Surface |
| 2 SM | 6.4 | 5.5 | 3200 | 40 | 80 | |
| 3 SM | 6.4 | 5.5 | 4000 | 50 | 80 | |
| 4 SM | 7.1 | 6.6 | 4400 | 55 | 80 | |
| 1 SP | 3.9 | 3.0 | 640 | 8 | 80 | Suspended |
| 2 SP | 6.0 | 3.0 | 1200 | 15 | 80 | |
| 3 SP | 6.0 | 3.8 | 1800 | 20 | 90 | |
| 4 SP | 6.0 | 4.5 | 2400 | 30 | 80 | |
| 5 SP | 6.4 | 5.5 | 3200 | 40 | 80 | |
| 6 SP | 6.4 | 5.5 | 4000 | 50 | 80 | |
| 7 SP | 7.1 | 6.6 | 4400 | 55 | 80 | |

ORDERING LOGIC

EX: CYRO-1SM-30-27-ONF-20-BK-BK

| FAMILY | SIZE | WATTAGE | CCT | DIMMABLE | BEAM ANGLE | FINISH | REFLECTOR COLOR | OPTIONS |
|-------------|-------------|---------------|-----------------|-------------------|---------------|-----------------|------------------|---|
| CYRO | | | | | | | | |
| 1SM | 1 Surface | 30 30W | 27 2700K | ONF On/Off | 20 20° | BK Black | BK Black | CC Custom Configurations FOR ADDITIONAL OPTIONS CONTACT SALES@SAGE.LIGHTING |
| 2SM | 2 Surface | 40 40W | 30 3000K | TR Triac | 40 40° | WH White | SL Silver | |
| 3SM | 3 Surface | 50 50W | 40 4000K | 0-10 0-10V | | | WH White | |
| 4SM | 4 Surface | 55 55W | 50 5000K | | | | | |
| 1SP | 1 Suspended | 8 8W | | | | | | |
| 2SP | 2 Suspended | 15 15W | | | | | | |
| 3SP | 3 Suspended | 20 20W | | | | | | |
| 4SP | 4 Suspended | 30 30W | | | | | | |
| 5SP | 5 Suspended | 40 40W | | | | | | |
| 6SP | 6 Suspended | 50 50W | | | | | | |
| 7SP | 7 Suspended | 55 55W | | | | | | |