

The DTW-1830 is a flexible LED ribbon line that offers Dim to Warm CCT capabilities with a high, 90+ CRI.


- Dim to Warm Family
- Indoor / Outdoor
- 95 lm/w

PROJECT _____ DATE _____

COMMENTS _____



IP20 IP67

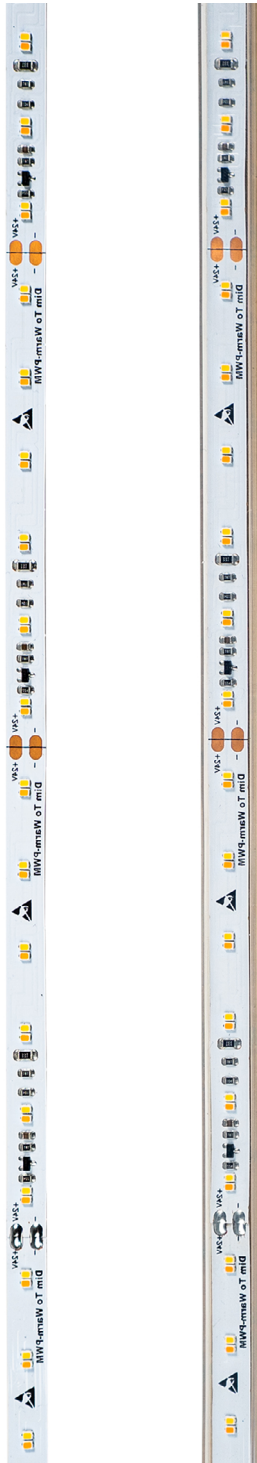

PHYSICAL

Mounting	3M Adhesive
Maximum Run	16' 4"
CCT	1800-3000K
CRI	90+

ELECTRICAL

Voltage	24V DC Constant Voltage Output
Dimming	0-10V

PERFORMANCE

Warranty	5 years
Certification	UL, CUL, CE, ROHS Approved
IP Rating	IP20 or IP67

APPLICATIONS

- Cove & Perimeter Lighting
- Architectural Back Lighting
- Walls & Surfaces
- Stairs & Walkways
- Decorative Signage
- Channel Letters

ENERGY CHART

TYPE	POWER w/ft	LUMENS/FT	EFFICACY lm/w
SW-DTW-3	3.0	290	95
SW-DTW-6	6.1	579	95

ORDERING LOGIC

EX: DTW-1830-3-IP20-ST

FAMILY	TYPE	POWER	IP RATING	LENGTH
DTW	1830			ST
	1830 1800K-3000K	3 3.0W/Ft 6 6.1W/Ft	IP20 IP20 IP67 IP67	ST 16'; Cut in Field STANDARD

CONNECTION DRAWINGS OF SINGLE COLOR

