


PROJECT  DATE

COMMENTS



**IN STOCK**

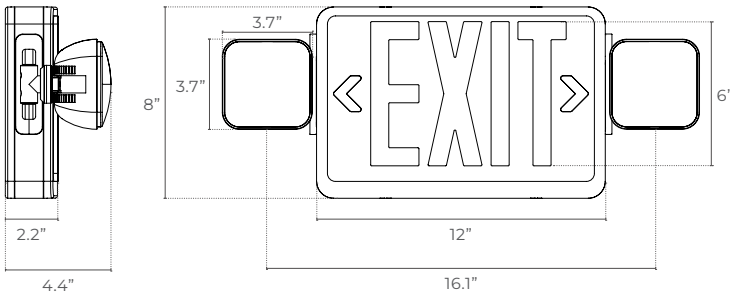

## EXC THERMOPLASTIC EXIT COMBO LED

The EXC series is a 120V/277VAC dual voltage thermoPlastic exit sign offered with a single, double, or universal face plate and Red or Green LEDs. EXC is UL 94V-0 flame rated, damp location listed and includes a test switch and charge indicator. The EXC is easy to install with its universal J-box mounting pattern and has a maximum 24-hour full recharge time. EXC can also be ordered with remote head capacity up to 3W.

- Residential
- Commercial
- Hospitality

### PHYSICAL

Material	Injection-Molded ThermoPlastic ABS Housing
Mounting	Universal J-Box Mounting Pattern
Finish	White
Source	LED
Face Count	Single, Double or Universal (Single/Double)
Letter Color	Green or Red (6" Height, 3/4" Stroke)

### PERFORMANCE

Warranty	5 years for fixture housing & 2 years for battery
Certifications	Damp Location, cULus, UL 94V-0 Flame Rating, CEC, FCC, DOE
IP Rating	IP20
Operating Temperature	0° to 40° C (32° to 104° F)

### ELECTRICAL

Voltage	120V/277VAC Dual Voltage
Wattage	4.2W
Battery	9.6V Nickel Cadmium 90-Minutes Emergency Operation

### ORDERING LOGIC

EX: EXC-S-G-AC

FAMILY	FACE COUNT	LETTER COLOR	OPERATION	REMOTE CAPACITY EM Only
<b>EXC</b>				
<b>S</b>	Single	<b>G</b> Green	<b>AC</b> AC Only	<b>(blank)</b> No Remote Capacity
<b>D</b>	Double	<b>R</b> Red	<b>EM</b> Emergency (Nickel-cadmium battery)	<b>RC</b> Remote Capacity UP TO 3W LOAD
<b>U</b>	Universal	<b>U</b> Universal Red/Green <small>ONLY AVAILABLE WITH UNIVERSAL FACE OPTION</small>		



**ADDITIONAL IMAGERY**



Universal Color

