


# EXSC1 SLIM THERMOPLASTIC COMBO ROUND HEADS LED

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_

COMMENTS \_\_\_\_\_



**IN STOCK**

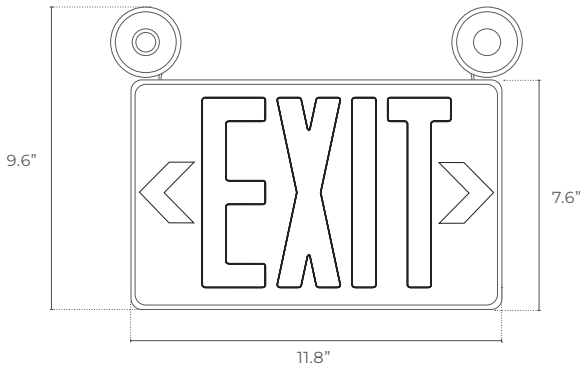

The EXSC1 series is a 120/277V dual voltage thermo-plastic exit combo offered with single, double or universal face plate and Red LEDs. EXSC1 is UL 94V-0 flame rated, damp location listed and includes a test switch and charge indicator. The EXSC1 is easy to install with its universal J-box mounting pattern and has a maximum 24-hour full recharge time. EXSC1 can also be ordered with remote head capacity up to 2W.

- Hospitality
- Commercial
- Residential

## PHYSICAL

Material	Injection-Molded Thermo-plastic ABS Housing
Mounting	Universal J-Box Mounting Pattern
Finish	White
Face Count	Single, Double or Universal (Single/Double)
Letter Color	Red (6" Height, 3/4" Stroke)
Source	LED

## PERFORMANCE

Warranty	5 years for fixture housing & 2 years for battery
Certifications	Damp Location, cULus, UL 94V-0 Flame Rating, CEC, DOE, FCC
IP Rating	IP40
Operating Temperature	32° to 104°F (0° to 40°C)

## ELECTRICAL

Voltage	120/277VAC Dual Voltage
Wattage	3.5W
Battery	3.6V Nickel Cadmium 90-Minutes Emergency Operation

## ORDERING LOGIC

EX: EXSC1-S-AC

FAMILY	FACE COUNT	OPERATION	REMOTE CAPACITY <small>EM ONLY</small>
<b>EXSC1</b>			
<b>S</b>	Single	<b>AC</b> AC Only	<b>(blank)</b> No Remote Capacity
<b>D</b>	Double	<b>EM</b> Emergency (Nickel-cadmium battery)	<b>RC</b> Remote Capacity <small>UP TO 2W LOAD</small>