

PROJECT _____ DATE _____

COMMENTS _____



IN STOCK



ENERGY CHART

SIZE	HEIGHT inches	WIDTH inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w	VOLTAGE/CURRENT INPUT	
						120V	277V
Small	5.89	7.2	2025	15	135	0.12A	0.06A
	5.89	7.2	2700	20	135	0.2A	0.7A
	5.89	7.2	4725	35	135	0.3A	0.1A
Medium	5.89	7.2	4725	35	135	0.3A	0.1A
	9.85	9.72	4725	60	135	0.5A	0.2A
	9.85	9.72	8100	80	135	0.6A	0.3A
Large	11.55	12.09	10800	100	135	0.8A	0.3A
	11.55	12.09	13500	120	135	1.0A	0.4A
	11.55	12.09	16200	150	135	1.2A	0.5A

FLW-QS FLOOD LIGHT WIDE LED QUICK SHIP

FLW-QS is a wattage and CCT selectable, IP65 rated, DLC Premium LED flood light with wide and uniform 120-degree distribution. FLW-QS is easy to install with multiple mounting methods including knuckle, yoke or slip fitter. The die cast aluminum housing and bronze powder coat are rust and corrosion proof and the fixture is equipped with a high quality tempered glass lens. FLW-QS can replace 30-500W metal halide and high pressure sodium fixtures.

- Pathway
- Underpasses
- Perimeter / Area Lighting

PHYSICAL

Material	Die-Cast Aluminum
Mounting	Knuckle, Slip Fitter, Yoke
Lens	Glass
Finish	Bronze Powder Coat
Source	Lumileds LEDs

PERFORMANCE

Warranty	5 years
Certifications	cULus, DLC Premium, FCC
IP Rating	IP65
Rated Life	L70 50,000 hours
Operating Temperature	-20°C to 60°C (-4°F to 140°F)
CCT	Field Selectable: 3000K, 4000K, 5000K
CRI	72+
Beam Angle	120°

ELECTRICAL

Wattage	Field Selectable: 15W/20W/35W, 35W/60W/80W, 100W/120W/150W
Voltage	120-277V
Power Factor	0.9
Dimmable	0-10V

ORDERING LOGIC


EX: FLW-QS-S-KM-BZ

FAMILY	SIZE	MOUNTING	FINISH
FLW-QS			BZ
	S 15/20/35W	KM Knuckle Mount <small>ONLY AVAILABLE WITH SIZE S OR M</small>	BZ Bronze
	M 35/60/80W	UB U "Yoke Bracket"	
	L 100/120/150W	SF Slip Fitter <small>ONLY AVAILABLE WITH SIZE L</small>	




DIMENSIONS


15W / 20W / 35W

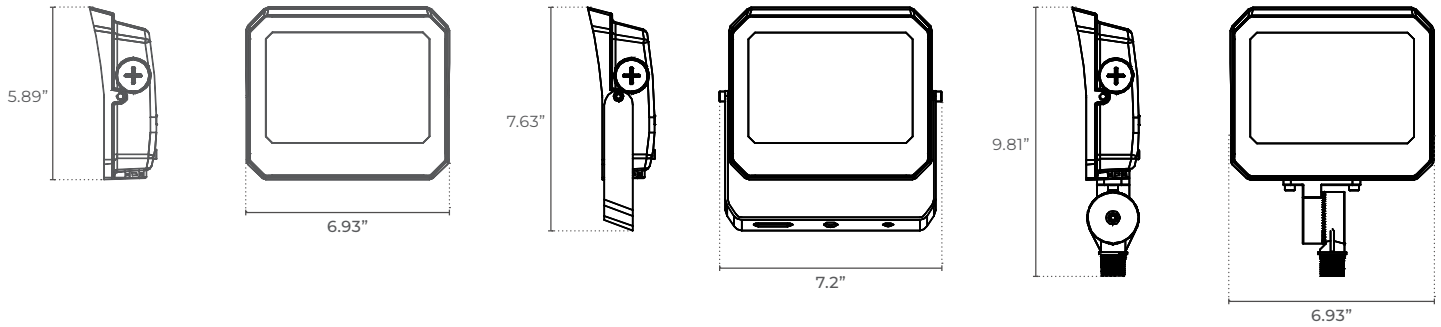



35W / 60W / 80W

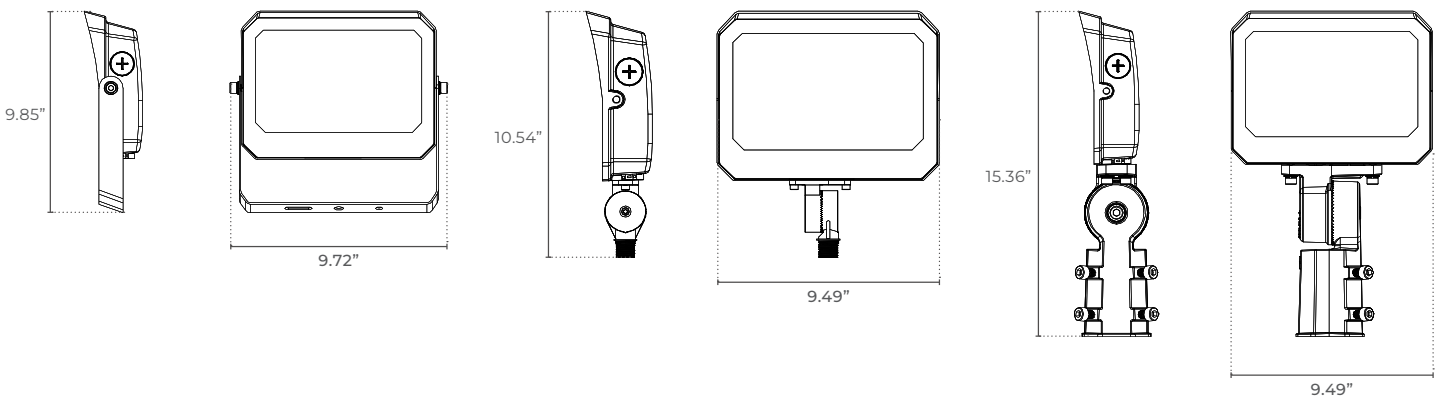

100W / 120W / 150W

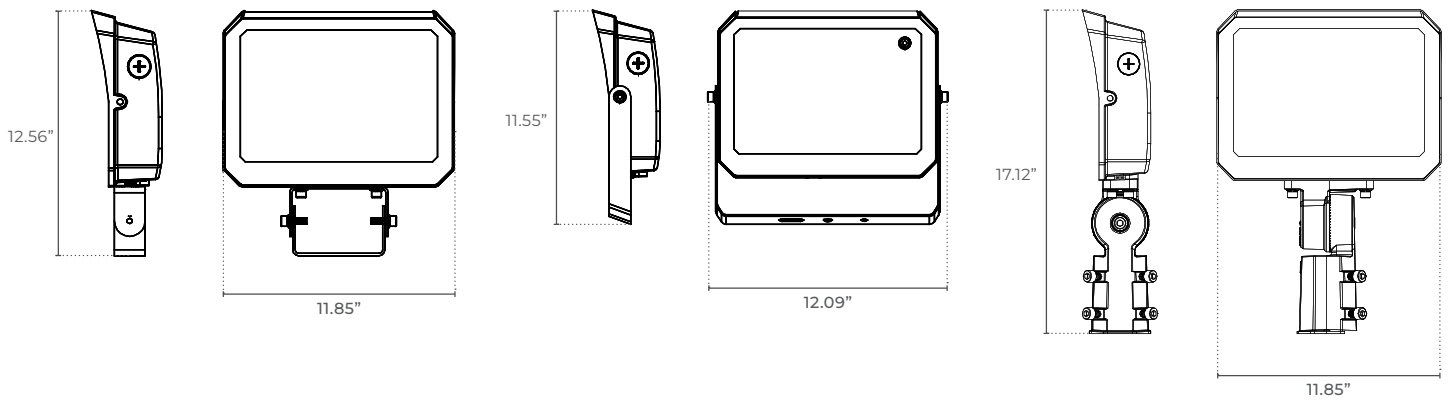


FIELD SELECTABLE WATTAGE & CCT SWITCHES

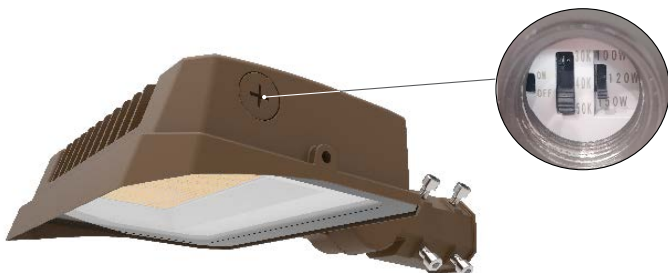


PHOTOMETRICS - FLW-QS-15W

AVERAGE BEAM ANGLE (50%): 120°

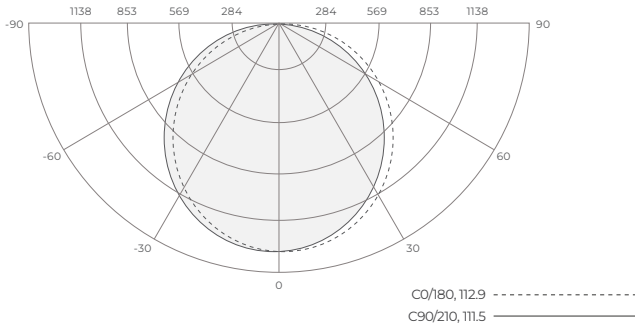


PHOTOMETRICS - FLW-QS-30W

AVERAGE BEAM ANGLE (50%): 120°

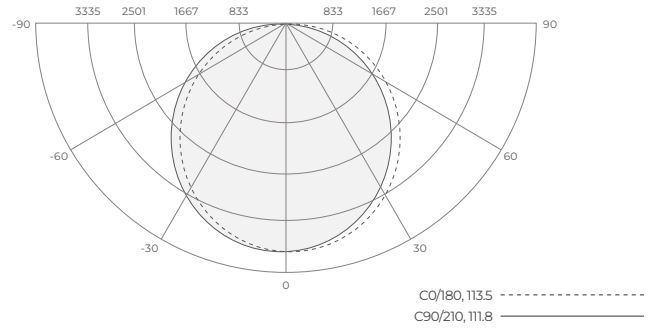


PHOTOMETRICS - FLW-QS-60W

AVERAGE BEAM ANGLE (50%): 120°

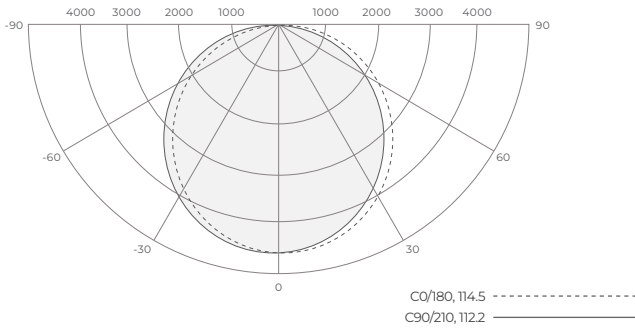


PHOTOMETRICS - FLW-QS-80W

AVERAGE BEAM ANGLE (50%): 120°

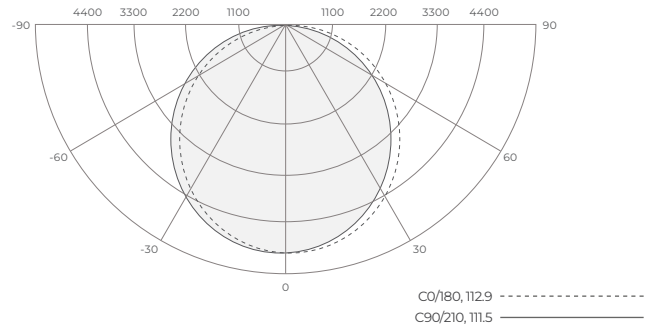


PHOTOMETRICS - FLW-QS-100W

AVERAGE BEAM ANGLE (50%): 120°

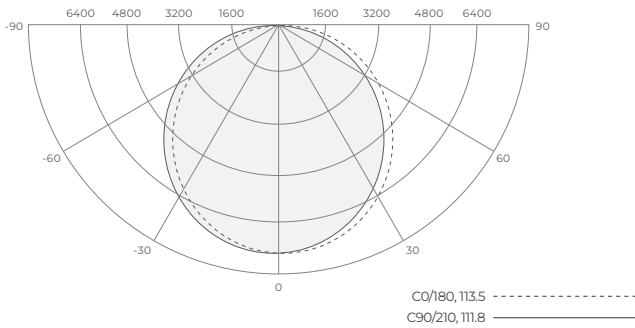


PHOTOMETRICS - FLW-QS-150W

AVERAGE BEAM ANGLE (50%): 120°

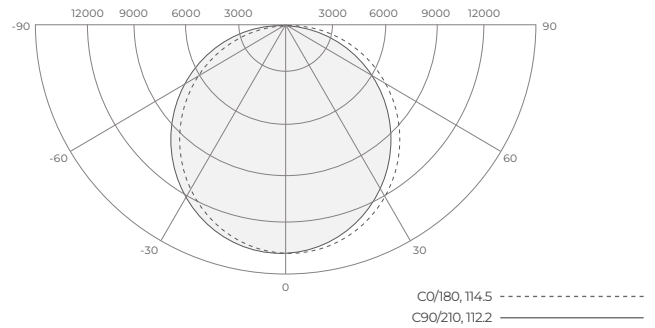


MOUNTING

KNUCKLE MOUNT

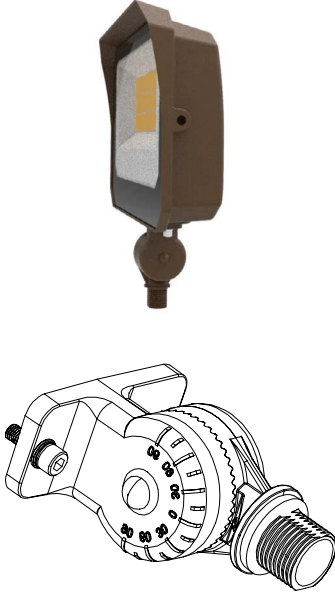

SLIP FITTER MOUNT

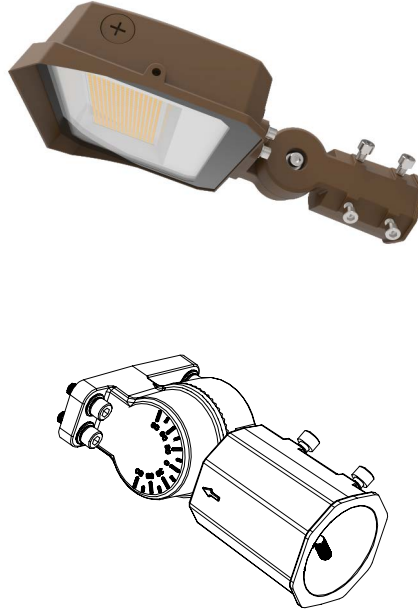

YOKE MOUNT

