

PROJECT DATE

COMMENTS



IN STOCK



ENERGY CHART

INPUT CURRENT		DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
120V	277V			
0.17A	0.07A	2520	21	120

JJ-QS JELLY JAR LED QUICK SHIP

JJ-QS is a DLC Premium, IP65 rated, universal voltage, 0-10V dimmable Jelly Jar LED with an adjustable bracket that is easy to install on ceilings, walls, threaded poles, and junction boxes. JJ-QS is constructed of heavy die-cast aluminum alloy and a tempered glass lens. An ideal solution for elevator pits, garages, attics, and exterior areas.

PHYSICAL

Material	Heavy Die-Cast Aluminum Alloy Housing
Lens Material	Tempered Glass
Mounting	Angle-Adjustable U Bracket Mount (Ceiling, Wall or Square Pole Mounting)
Finish	Powder Coat Silver
Source	Lumileds LEDs

PERFORMANCE

Warranty	5 years
Certifications	cULus, DLC Premium, FCC
IP Rating	IP65
LED Lifetime	L70 > 50,000 hours
Operating Temperature	-30°C to 45°C (-22°F to 113°F)
CCT	5000K
CRI	80+
Beam Angle	160°

ELECTRICAL

Wattage	21W
Voltage	120-277V
Power Factor	0.9
Dimming	0-10V

ORDERING LOGIC


EX: JJ-QS

FAMILY

JJ-QS




DIMENSIONS



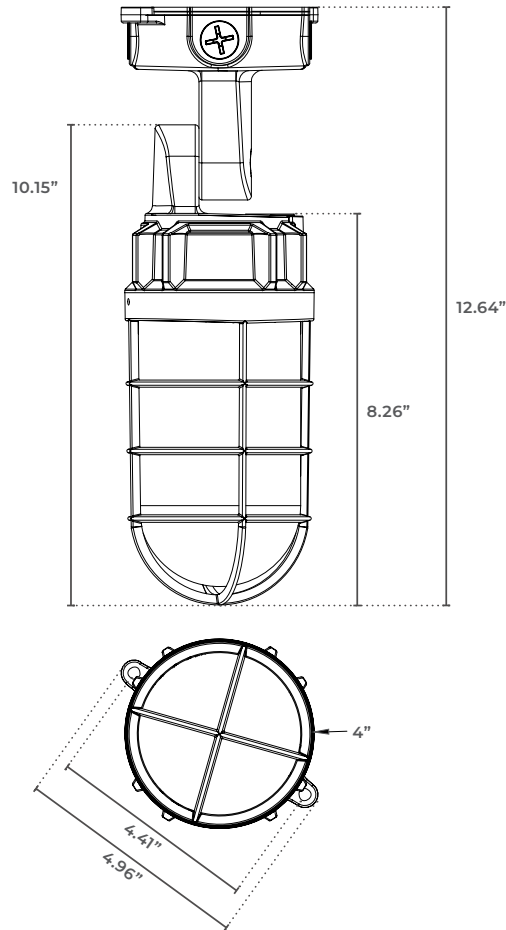


PHOTOMETRICS - 21W - 5000K

AVERAGE BEAM ANGLE (50%): 160°

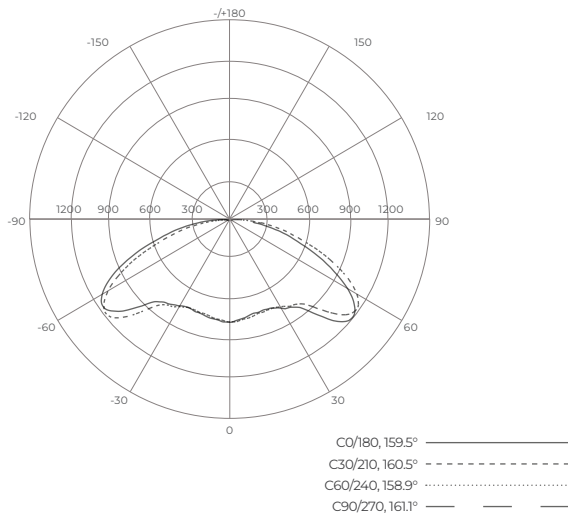

INSTALLATION METHODS

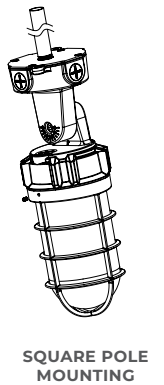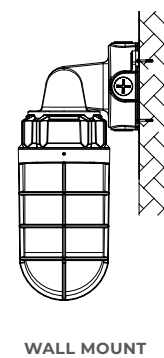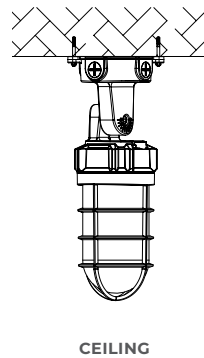

ADDITIONAL IMAGERY

