


NCH4-IC-FR NEW CONSTRUCTION HOUSING 4-INCH IC RATED FIRE RATED

The NCH4-IC-FR Series is an airtight new construction housing that offers an IC rating and fire rating option.

- Hospitality
- Parking Garages
- Utility Rooms
- Corridors
- Closets

PROJECT _____ DATE _____

COMMENTS _____

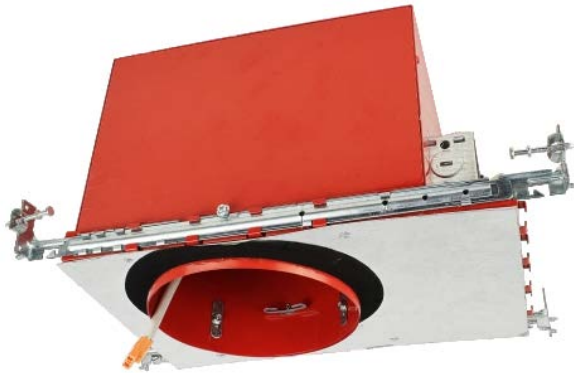

PHYSICAL

Material	Die-Formed Aluminum
Mounting	New Construction
Source	E26 LED Medium Base Socket and T24 Connector
Hanger Bar	
Positioning	Locked at Any Point On 24" Joist Span Can be Shortened for 12" Joists Long or Short Axis of Housing
Alignment	T-Bar Spline
Junction Box	
Listings	UL and cETLus for Branch Wiring
Knockouts	1/2" and 3/4" Pry-Out Slots
Wiring	Pre-Wired J-Box with Removable Access Plate
Leads	All Leads #18AWG with Supplied Quick Connectors Ground Wire Connected to the Bottom

PERFORMANCE

Warranty	5 years
Certifications	IC Rated, 2 Hour Fire Rated, cETLus, UL
Operating Temperature	-30°C to 95°C (-22°F to 203°F)

ELECTRICAL

Wattage	50W Maximum
Voltage	120V

ORDERING LOGIC

EX: NCH4-IC-FR

FAMILY	OPTIONS
NCH4	IC-FR
	IC-FR IC Rated, 2 Hour Fire Rated



DIMENSIONS

