



TERRAIN SITE LIGHTING

PROJECT _____ DATE _____

COMMENTS _____



ENERGY CHART

SIZE	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
1	8000	50	160
	12000	75	160
	16000	100	160
	24000	150	160
	13500 / 17500 / 24000	75 / 100 / 150	180 / 175 / 160
2	32000	200	160
	38400	240	160
	28000 / 35000 / 40000	152 / 200 / 240	180 / 175 / 160

ORDERING LOGIC

EX: PL-1-50-12-40-3-BK

FAMILY	SIZE	WATTAGE	VOLTAGE	CCT	DISTRIBUTION	FINISH
PL			12		3	
	1	50 50W 75 75W 100 100W 150 150W FS1 Field Selectable <small>75W / 100W / 150W</small>	12 120-277V	40 4000K 50 5000K	3 Type 3	BK Black BZ Bronze BR Brown GR Gray
	2	200 200W 240 240W FS2 Field Selectable <small>152W / 200W / 240W</small>				

SEE NEXT PAGE FOR OPTIONS

PL PARKING LOT LED DUSK-TO-DAWN

The PL Series offers a DLC Certified, IP66 wet location rated LED luminaire with optional occupancy sensors for maximum energy savings.

- Multiple Finish Options
- Standard 1-10V Dimming
- Multiple Mounting Options

PHYSICAL

Material	Die-Cast Aluminum
Mounting	Slip Fitter, Arm/Wall Bracket, Trunnion, Yoke Bracket
Lens	Polycarbonate Diffuser
Finish	Black, Bronze, Brown, Gray
CCT	4000K, 5000K
CRI	80+

PERFORMANCE

Warranty	5 years
Certifications	CETL, DLC
IP Rating	IP66
Rated Life	>100,000 Hours
Operating Temperature	-40°C to 50°C (-40°F to 122°F)

ELECTRICAL


Wattage	50W, 75W, 100W, 150W, 152W, 200W, 240W
Voltage	120-277VAC
Dimmable	1-10V
Surge Protector	Yes
Control	Dusk-to-Dawn Photocell

OPTIONS

PL-SF	Slip Filter	PL-RPM5	Round Pole Mount, 5" Pole	PL-UB	"U" Bracket
PL-SPM	Square Pole Mount	PL-RPM6	Round Pole Mount, 6" Pole	MS	Motion Sensor
PL-RPM4	Round Pole Mount, 4" Pole	PL-TB	Trunion Bracket	RC	Remote Control for Motion Sensor

DISTRIBUTION

TYPE 3

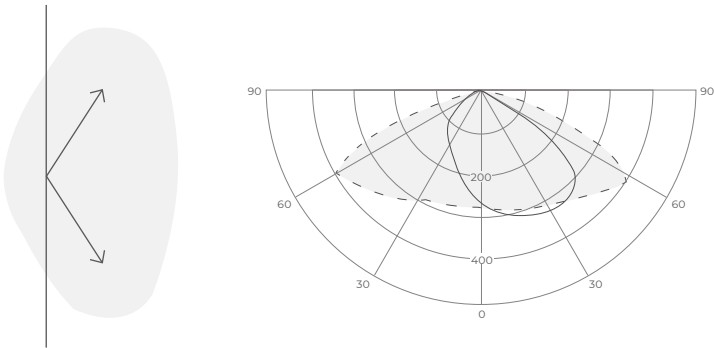

ADDITIONAL IMAGERY


150W WITH PHOTOCELL & FIELD SELECTABLE WATTAGE DIP SWITCH



150W WITH COVER ON PHOTOCELL



OPTIONS

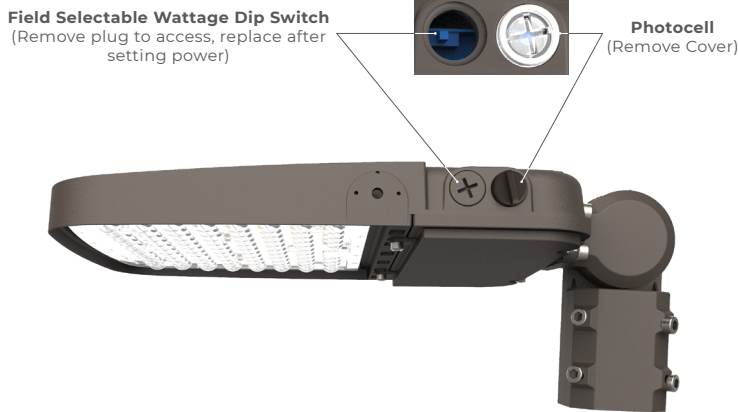

200W WITH PHOTOCELL & FIELD SELECTABLE WATTAGE DIP SWITCH



200W WITH COVER ON PHOTOCELL

