

PROJECT DATE

COMMENTS



ENERGY CHART

SIZE	HEIGHT inches	WIDTH inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
1	19.8	14.2	7800	60	130
	19.8	14.2	13000	100	130
	19.8	14.2	19500	150	130

PTR POST TOP ROUND LED

The PTR Series offers an IP65 wet location rated outdoor LED luminaire with a daylight sensor or motion sensor.

- Parking Lots
- Underpasses
- Perimeter / Area Lighting

PHYSICAL

Material	Die-Cast Aluminum
Mounting	2.4" / 3.0" Tenon
Lens	Glass
Finish	Black
CCT	3000K, 4000K, 5000K, 5700K
CRI	70+
Beam Angle	120°

PERFORMANCE

Warranty	5 years
Certifications	CUL, CE, DLC, ROHS Compliant
IP Rating	IP65
Rated Life	L80 50,000 hours
Operating Temperature	-35°C to 55°C (31°F to 131°F)

ELECTRICAL



Wattage	60W, 100W, 150W
Voltage	100-277V
Power Factor	>0.9

ORDERING LOGIC

EX: PTR-60-30

FAMILY	WATTAGE	CCT	OPTIONS
PTR			
	60 60W	30 3000K	DS Daylight Sensor
	100 100W	40 4000K	MS Motion Sensor
	150 150W	50 5000K	
		57 5700K	

DIMENSIONS

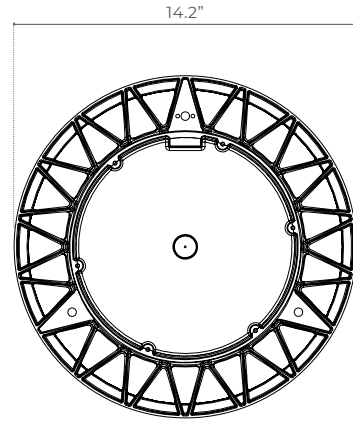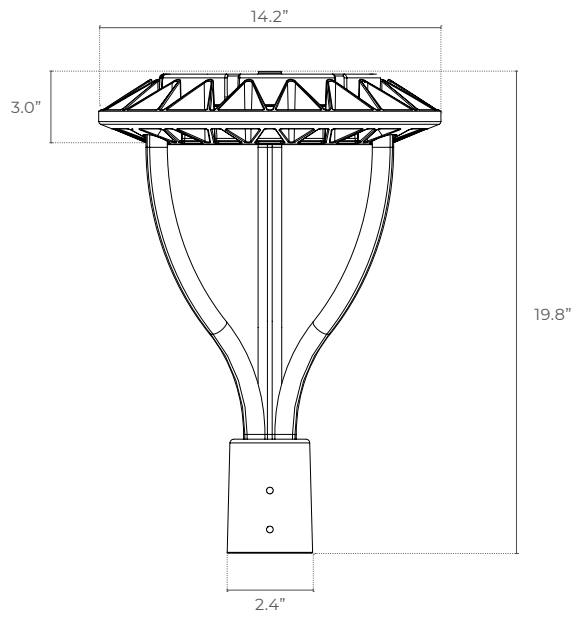

DAYLIGHT SENSOR



MOTION SENSOR

