

PROJECT DATE

COMMENTS









IN STOCK



DIMENSIONAL DATA

SIZE	HEIGHT inches	DIAMETER inches
6	2.89	7.36

ENERGY CHART

SIZE	CCT (Field Selectable)	DELIVERED LUMENS	WATTAGE	EFFICACY Im/w
6	2700K	1233	15	82.2
	3000K	1350	15	90
	3500K	1413	15	94.2
	4000K	1417	15	94.5
	5000K	1329	15	88.6

RDR-QS ROUND DOWNLIGHT RETROFIT LED QUICK SHIP

RDR-QS is a 6-inch LED retrofit downlight with field selectable CCT and an aluminum reflector with an architectural white finish. RDR-QS is easy and quick to install with recessed mounting clips that secure the downlight into existing or new construction housings. RDR-QS is damp location rated and Energy Star certified with continuous dimming to 10% with triac dimmers.

- · Residential
- · Commercial
- Hospitality

PHYSICAL

Material	PC Driver Housing and Aluminum Reflector
Lens Material	Polycarbonate
Mounting	Recessed
Reflector	Aluminum Baffle
Finish	Matte White

PERFORMANCE

Warranty	5 years
Certifications	Damp Location, Energy Star, cETLus
Rated Life	L70 ≥ 50,000hours
Operating Temperature	-4°F~ 122°F (-20~40°C)
ССТ	Field Selectable: 2700K/3000K/3500K/4000K/5000K
CRI	90
Beam Angle	100°

ELECTRICAL

Wattage	15W
Voltage	120-277V 60Hz
Power Factor	> 0.9
Dimmable	100% - 10% Triac Dimming

ORDERING LOGIC EX: RDR-QS-6-15


 FAMILY
 SIZE
 WATTAGE


 RDR-QS
 6
 15

 6
 Fits 5" / 6"
 15
 15W



DIMENSIONS



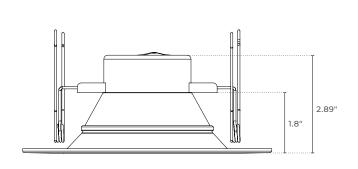

RECOMMENDED DIMMERS

LEVITON MODELS

- 6672
- 6674DSL06

- · PD-6WCL
- MACL-153M//MA-R

LUTRON MODELS

- TG-600PR-WH S-600PR-WH
- CTCL-153PDH-WH TGCL-153PH-LA SLV-600P-AL
- DV-600PR-WH
- SCL-153PH-WH GT-600P
 - MSCL-OP153M

DVCL-153P RNL06

IPL06

ADDITIONAL IMAGERY



INCLUDED ACCESSORIES

E26 Adapter



