

PROJECT _____ DATE _____

COMMENTS _____



IN STOCK



ENERGY CHART

SIZE	DIAMETER inches	LUMENS	WATTAGE	EFFICACY lm/w
3	3	390	6	65
4	4	675	9	75
6	6	960	12	80
		1200	15	80
8	8	1440	18	80
12	12	1920	24	80

RPR RECESSED PANEL ROUND LED

The RPR Series offers a low-profile, high output recessed mount LED luminaire that meets Energy Star's efficiency standards.

- Residential
- Commercial
- Hospitality

PHYSICAL

Material	Die-Cast Aluminum
Mounting	Recessed
Lens	Polycarbonate Diffuser
Finish	White
CCT	Field Selectable 5CCT: 2700K, 3000K, 3500K, 4000K, 5000K
CRI	90+
Beam Angle	120°

PERFORMANCE

Warranty	5 years
Certifications	Wet Location, IC Rated, Title 24, CETL Energy Star
Rated Life	L70 50,000 hours
Operating Temperature	-20°C to 40°C (-4°F to 104°F)

ELECTRICAL

Wattage	6W, 9W, 12W, 15W, 18W, 24W
Voltage	120V
Power Factor	>0.90
Dimmable	Triac Dimming


ORDERING LOGIC

EX: RPR-3


FAMILY	SIZE	WATTAGE <small>For 6" Product Only</small>	
RPR	3 3"	12	12W
	4 4"	15	15W
	6 6"		
	8 8"		
	12 12"		

DIMENSIONS


3" Product

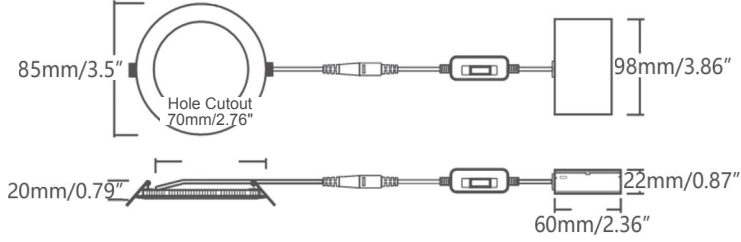


4" Product

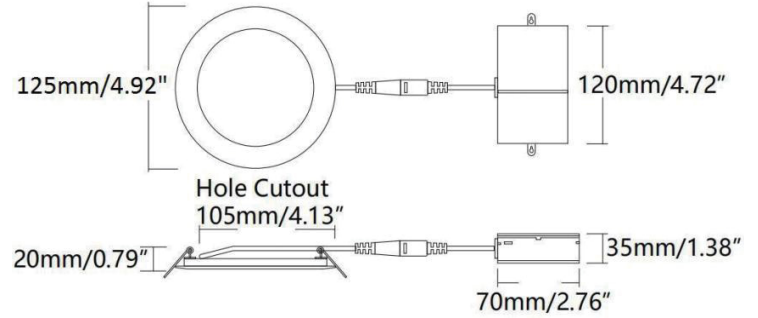

6" Product

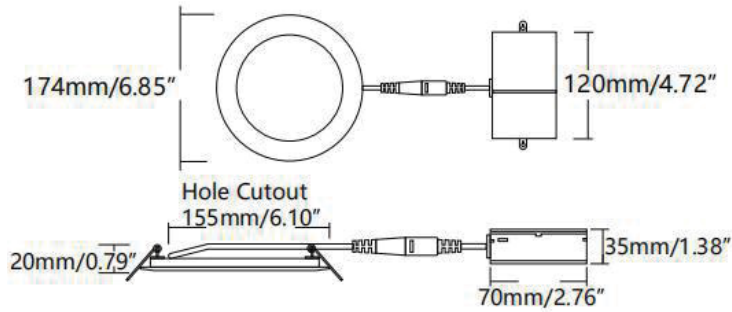

8" Product

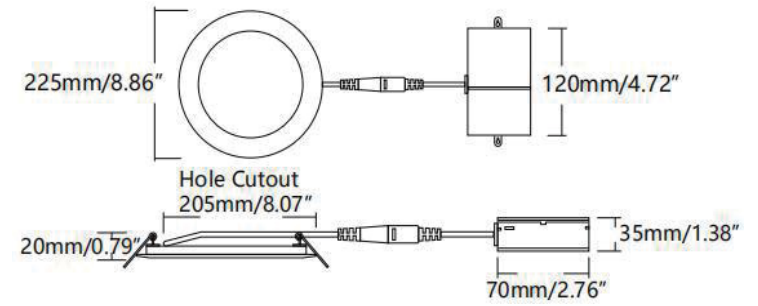

12" Product

