

PROJECT _____ DATE _____

COMMENTS _____



IN STOCK



ENERGY CHART

DIAMETER inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
4	720	9	80
6	960	12	80

RPR-QS RECESSED PANEL ROUND LED QUICK SHIP

The RPR Series offers a low-profile, high output recessed mount LED luminaire that meets Energy Star's efficiency standards.

- Residential
- Commercial
- Hospitality

PHYSICAL

Material	Aluminum Alloy Housing, Steel-Encased
Mounting	Recessed
Lens	Polycarbonate
Finish	White

PERFORMANCE

Warranty	5 years
Certifications	Energy Star, ETL, cETL
Rated Life	50,000 hours
Operating Temperature	-30°C to 45°C (-22°F to 113°F)
CCT	Field Selectable 5CCT: 2700K, 3000K, 3500K, 4000K, 5000K
CRI	>80
Beam Angle	120°

ELECTRICAL

Wattage	9W, 12W
Voltage	120V
Power Factor	0.9
Dimmable	Triac Dimming


ORDERING LOGIC

EX: RPR-QS-4-FS

FAMILY	DIAMETER	CCT
RPR-QS		FS
	4 4"	FS Field Selectable 2700K / 3000K / 3500K / 4000K / 5000K
	6 6"	

DIMENSIONS

4" Product

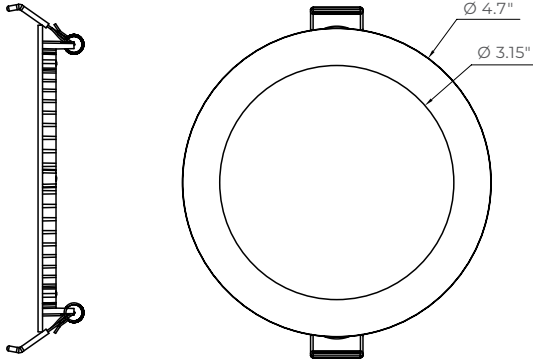

6" Product

