

PROJECT

DATE

COMMENTS























ENERGY CHART

SIZE	DIAMETER inches	LUMENS	WATTAGE	EFFICACY Im/w
4	4	600	10	65
6	6	720	12	60

RPRS RECESSED PANEL ROUND SMART LED

The RPRS Series offers a low-profile, high output recessed mount LED luminaire that meets Energy Star's efficiency standards. The RPRS offers Wifi pairing capabilities with multiple smart control features including voice control, music syncing, timing function, etc.

- · Residential
- · Commercial
- Hospitality

PHYSICAL

Material	Die-Cast Aluminum
Mounting	Recessed
Lens	Polycarbonate Diffuser
Finish	Black, Brushed Nickel, White
ССТ	RGBCW (RGB+6500K+2700K)
CRI	80+ or 90+
Beam Angle	120°

PERFORMANCE

Warranty	5 years
Certifications	Wet Location, CETL Energy Star, FCC
Rated Life	L70 35,000 hours

ELECTRICAL

Wattage	10W, 12W
Voltage	120V
Power Factor	>0.80
Dimmable	10% - 100% Voice or App Dimming

EX: RPRS-4-80-BK **ORDERING LOGIC**


FAMILY	SIZE	CRI	FINISH	
RPRS				
	4 4"	80 80+	вк	Black
	6 6"	90 90+	BN	Brushed Nickel
			WH	White



RPRS RECESSED PANEL ROUND SMART LED

DIMENSIONS

4-Inch

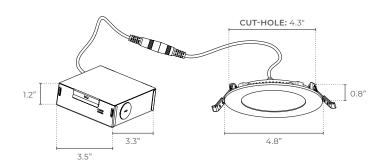

6-Inch

