

PROJECT _____ DATE _____

COMMENTS _____



DISCONTINUED



ENERGY CHART

SIZE	DIAMETER inches	LUMENS	WATTAGE	EFFICACY lm/w
4	4	630	9	70
6	6	960	12	80

RPS RECESSED PANEL SQUARE LED

The RPS Series offers a low-profile, high output recessed mount LED luminaire that meets Energy Star's efficiency standards.

- Residential
- Commercial
- Hospitality

PHYSICAL

Material	Die-Cast Aluminum
Mounting	Recessed
Lens	Polycarbonate Diffuser
Finish	White
CCT	Field Selectable 5CCT: 2700K, 3000K, 3500K, 4000K, 5000K
CRI	90+
Beam Angle	120°

PERFORMANCE

Warranty	5 years
Certifications	Wet Location, IC Rated, Title 24, CETL Energy Star
Rated Life	L70 50,000 hours
Operating Temperature	-20°C to 40°C (-4°F to 104°F)

ELECTRICAL

Wattage	9W, 12W
Voltage	120V
Power Factor	>0.90
Dimmable	Triac Dimming

ORDERING LOGIC


EX: RPS-4

FAMILY	SIZE
RPS	
	4 4"
	6 6"



DIMENSIONS

4" Product

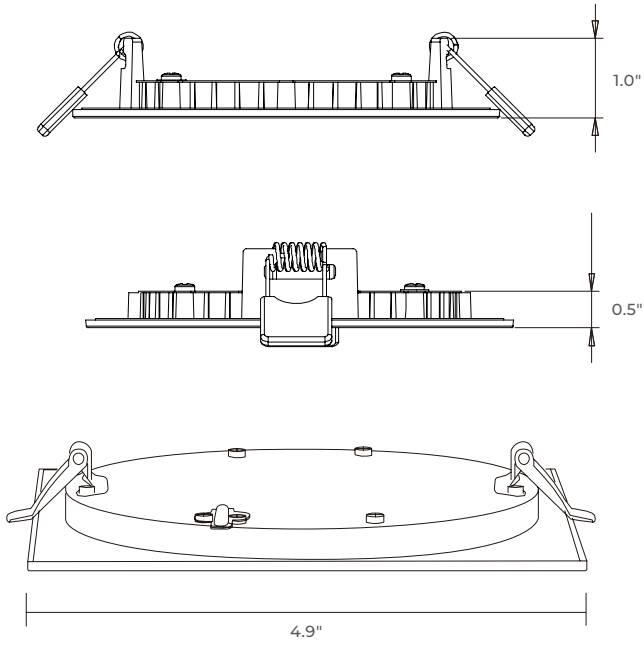

6" Product

