

PROJECT _____ DATE _____

COMMENTS _____



DISCONTINUED



ENERGY CHART

SIZE	DIAMETER inches	LUMENS	WATTAGE	EFFICACY lm/w
4	4	600	10	65
6	6	720	12	60

RPSS RECESSED PANEL SQUARE SMART LED

The RPSS Series offers a low-profile, high output recessed mount LED luminaire that meets Energy Star's efficiency standards. The RPSS offers Wifi pairing capabilities with multiple smart control features including voice control, music syncing, timing function, etc.

- Residential
- Commercial
- Hospitality

PHYSICAL

Material	Die-Cast Aluminum
Mounting	Recessed
Lens	Polycarbonate Diffuser
Finish	Black, Brushed Nickel, White
CCT	RGBCW (RGB+6500K+2700K)
CRI	80+ or 90+
Beam Angle	120°

PERFORMANCE

Warranty	5 years
Certifications	Wet Location, CETL Energy Star, FCC
Rated Life	L70 35,000 hours

ELECTRICAL

Wattage	10W, 12W
Voltage	120V
Power Factor	>0.80
Dimmable	10% - 100% Voice or App Dimming


ORDERING LOGIC

EX: RPSS-4-80-BK

FAMILY	SIZE	CRI	FINISH
RPSS	4 4"	80 80+	BK Black
	6 6"	90 90+	BN Brushed Nickel
			WH White

DIMENSIONS

4-Inch

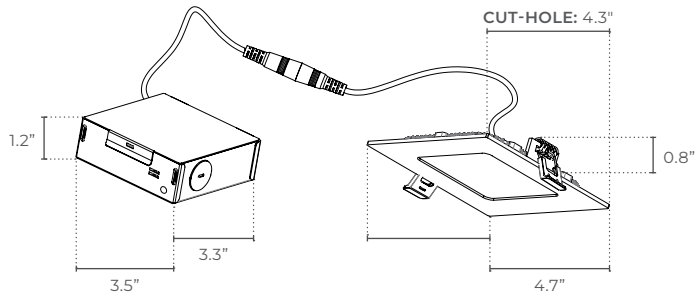

6-Inch

