

PROJECT DATE

COMMENTS













ENERGY CHART

SIZE	HEIGHT inches	DIAMETER inches	DELIVERED LUMENS	WATTAGE	EFFICACY Im/w
6	1.18	7.32	1000	15	66.7

SDL-MS SLIM DISK LIGHT LED MOTION SENSOR

The SDL-MS Series offers a low-profile, high output surface mount LED luminaire with a motion sensor that meets Energy Star's efficiency standards.

- Residential
- · Commercial
- Hospitality

PHYSICAL

Housing Material	Iron
Mounting	Surface Mount
Finish	White

PERFORMANCE

Warranty	5 years
Certifications	UL, Energy Star, FCC, Damp Location, Title 24, JA8 Compliant
Rated Life	L70 50,000 hours
Operating Temperature	-20°C to 40°C (-4°F to 104°F)
ССТ	Field Selectable 5CCT: 2700K/3000K/3500K/4000K/5000K
CRI	>90
Beam Angle	140°

ELECTRICAL

Voltage	120V
Wattage	15W
Power Factor	>0.9
Dimmable	Yes

ORDERING LOGIC EX: SDL-MS-6

FAMILY SIZE

SDL-MS

6

6 Fits 5"/6"








DIMENSIONS

Size 6

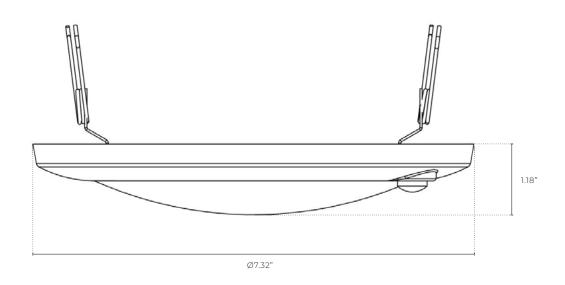

APPROVED DIMMERS

LEVITON MODELS

- 6674 1E1205 6633-P 6672 DB33K11F4205
- 6631 · 1A2305 IPL06 DSL06-1TW

LUTRON MODELS

- · NT-1000
- S-603P S-600P
- DVCL-153P-WH
- CTCL-153PDH-WH SLV-600P-WH
- DV-600P
- CT-603PGH-WH MIR-600THW-WH
- MACL-153M-WH
- S-600PR-WH DVLV-603P-IV
- · DVW-603PGH-WH
- DVFSQ-LFHSCL-153PR-WHCT-600PR-WH
- CT-103PR-WHDVWCL-153PH-LA
- CTCL-150H-WHCTCL-153PR-WHSTCL-153PH-WH