

PROJECT

DATE

COMMENTS



#### ENERGY CHART

SIZE	HEIGHT inches	TOTAL DIAMETER inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
4	0.63	4.96	650	10	65
6	0.87	7.86	1050-1200	15	70-80
11	1.34	10.91	1600	20	80

#### ORDERING LOGIC

EX: SDL-WL-4-27-WH

FAMILY	SIZE	CCT	FINISH
SDL-WL			
	4 4"	27 2700K	WH White
	6 5/6"	30 3000K	
	11 11"	40 4000K	
		50 5000K	

## SDL-WL SLIM DISK LIGHT LED WET LOCATION

The SDL-WL Series is a low-profile, high output surface mount LED luminaire suitable for new construction and retrofit applications. SDL-WL easily mounts to 5/6" recessed cans and 4" or larger junction boxes. SDL-WL meets Energy Star efficiency standards and is Wet Location listed.

- Residential
- Commercial
- Hospitality

#### PHYSICAL

Material	Aluminum
Mounting	Surface Mount, 5/6" recessed cans and 4" junction boxes
Finish	White

#### PERFORMANCE

Warranty	5 years
Certifications	Wet Location, Title 24, cETL, Energy Star, FCC. RoHS Compliant, JA8 Compliant
Rated Life	L70 50,000 hours
Operating Temperature	-20°C to 40°C (-4°F to 104°F)
CCT	2700K, 3000K, 4000K, 5000K
CRI	90+
Beam Angle	102°


#### ELECTRICAL

Voltage	120V
Wattage	10W, 15W, 20W
Power Factor	>0.9
Dimmable	100-10%, compatible with most Lutron and Leviton dimmers





**DIMENSIONS**



**Size 4**

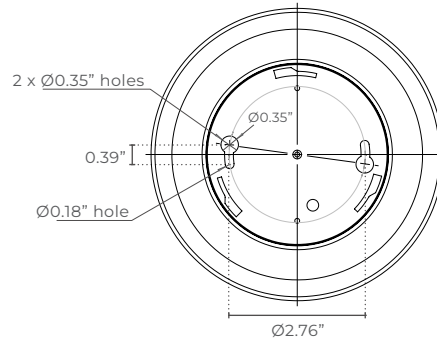

**Size 6**

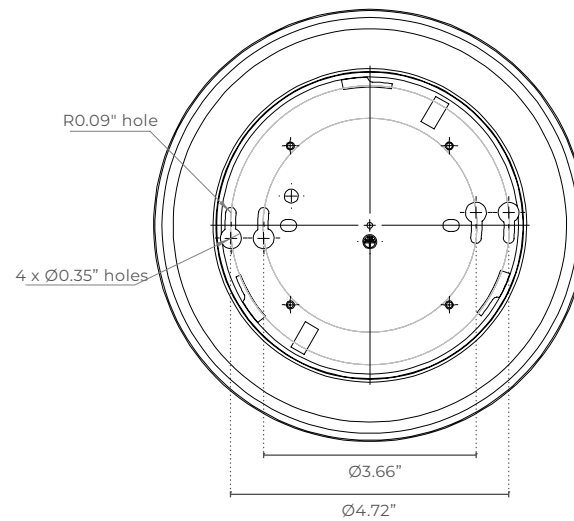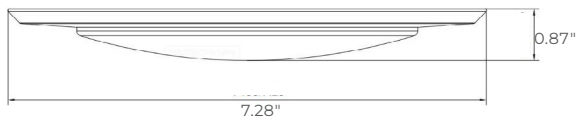


**Size 11**

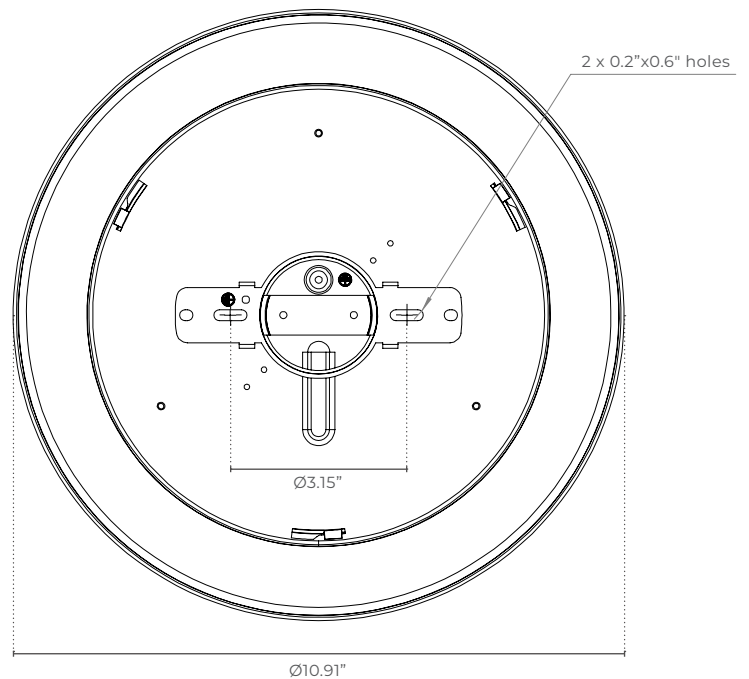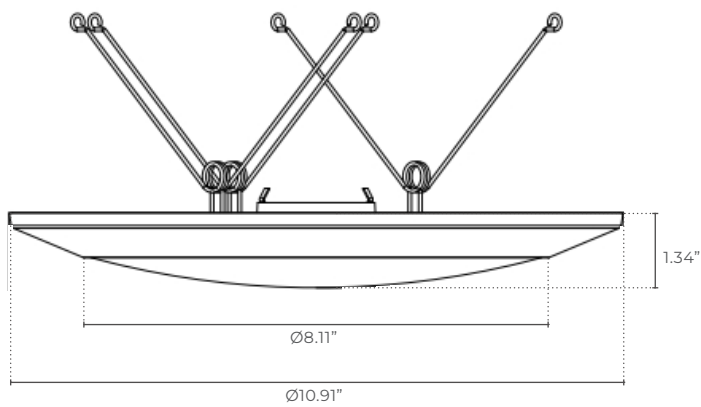

**DIMENSIONS (CONTINUED)**

Size 11

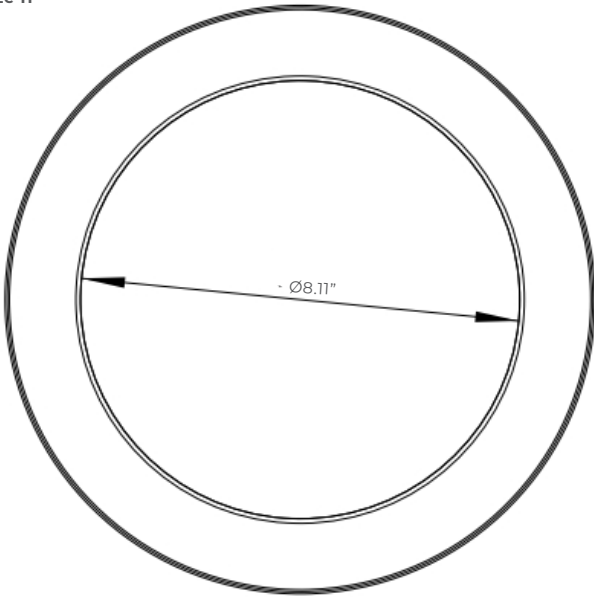
**APPROVED DIMMERS**
**LEVITON MODELS**

- 6674
- 6633-P
- 6672
- 6631
- IPL06
- 1E1205
- DB33K1
- 1F4205
- 1A2305
- DSL06-1TW

**LUTRON MODELS**

- NT-1000
- S-603P
- S-600P
- DVCL-153P-WH
- CTCL-153PDH-WH
- SLV-600P-WH
- DV-600P
- CT-603PGH-WH
- MIR-600THW-WH
- MACL-153M-WH
- S-600PR-WH
- DVLV-603P-IV
- DVW-603PGH-WH
- DVFSQ-LFH
- SCL-153PR-WH
- CT-600PR-WH
- CT-103PR-WH
- DVWCL-153PH-LA
- CTCL-150H-WH
- CTCL-153PR-WH
- STCL-153PH-WH

**ADDITIONAL IMAGERY**

Size 11

