

PROJECT

DATE

COMMENTS



DISCONTINUED



ENERGY CHART

LUMENS	WATTAGE	EFFICACY lm/w
48,000	300	140
64,000	400	140
80,000	500	140
96,000	600	140
112,000	700	140
128,000	800	140
160,000	1000	140

SLB SPORTS LIGHT BASIC LED

The SLB Sports Light Basic LED offers a high power, anti-glare system for the outdoors that is 2-10x brighter than a conventional light.

- Parks
- Stadiums
- Outdoor

PHYSICAL

Material	Aluminum Alloy
Bracket Material	Stainless Steel
Mounting	Joint U-Bracket, Knuckle Flat Bracket, Knuckle Slip Fitter
Lens	PMMA
Finish	Black, Blue, Red, Silver
CCT	3000K, 4000K, 5000K, 6000K
CRI	70+
Beam Angle	15°, 30°, 80°

PERFORMANCE

Warranty	5 years
Certifications	ETL, CE, ROHS Compliant
IP Rating	IP65
IK Rating	IK10
Rated Life	>80,000 hours
Operating Temperature	-40°C to 55°C (-40°F to 131°F)

ELECTRICAL

Voltage	100-277VAC, 347-480VAC
Power Factor	0.96
Dimmable	Dali, Zigbee, 1-10V Options Available

ORDERING LOGIC

EX: SLB-300-10-30-JU-15-BK


FAMILY	WATTAGE	VOLTAGE	CCT	MOUNTING	BEAM ANGLE	FINISH	OPTIONS
SLB							
300	300W	10 100-277VAC STANDARD	30 3000K	JU Joint U-Bracket STANDARD	15 15°	BK Black	DALI Dali Dimming
400	400W	34 347-480VAC	40 4000K	KF Knuckle Flat Bracket	30 30°	BL Blue	ZB Zigbee Dimming
500	500W		50 5000K	KS Knuckle Slip Fitter	80 80°	RD Red	1-10 1-10V Dimming
600	600W		60 6000K			SL Silver	
700	700W						
800	800W						
1000	1000W						




DIMENSIONS

300W-600W


Front

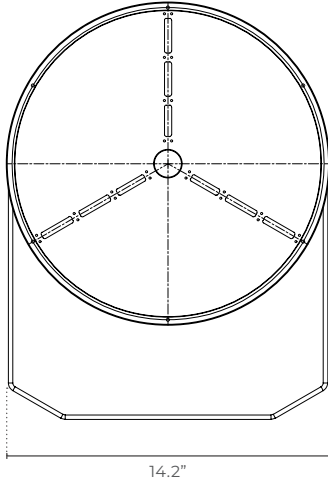

Side

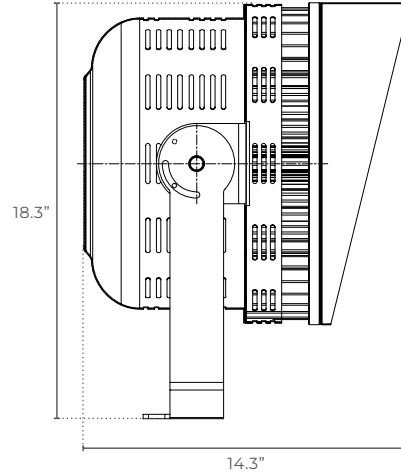


Button

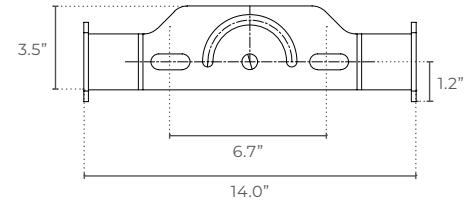


750W-1250W

Front

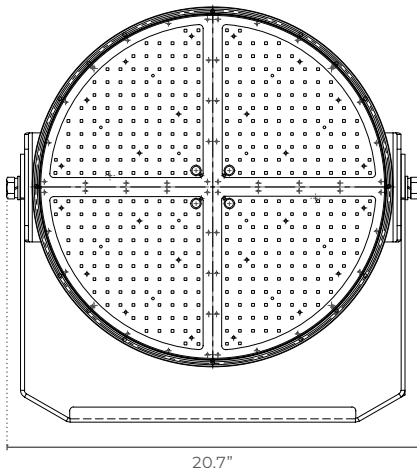

Side

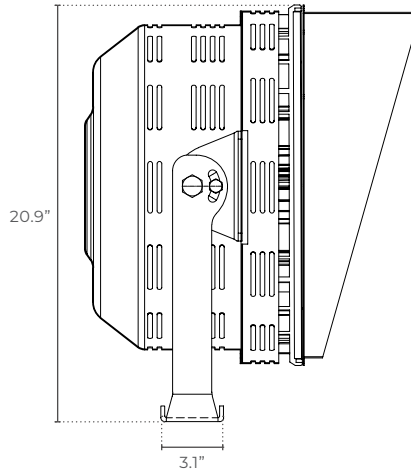

Button

