

PROJECT _____ DATE _____

COMMENTS _____



ENERGY CHART

SIZE	LUMENS	WATTAGE	EFFICACY lm/w
3	48000	300	140
4	64000	400	140
5	80000	500	140
6	96000	600	140
7	112000	700	140
8	128000	800	140
10	160000	1000	140

SLB SPORTS LIGHT BASIC LED

The SLB Sports Light Basic LED offers a high power, anti-glare system for the outdoors that is 2-10x brighter than a conventional light.

- Parks
- Stadiums
- Outdoor

PHYSICAL

Material	Aluminum Alloy
Bracket Material	Stainless Steel
Mounting	Joint U-Bracket, Knuckle Flat Bracket, Knuckle Slip Fitter
Lens	PMMA
Finish	Black, Blue, Red, Silver
CCT	3000K, 4000K, 5000K, 6500K
CRI	70+
Beam Angle	15°, 30°, 80°

PERFORMANCE

Warranty	5 years
Certifications	ETL, CE, ROHS Compliant
IP Rating	IP65
IK Rating	IK10
Rated Life	>80,000 hours
Operating Temperature	-40°C to 55°C (-40°F to 131°F)

ELECTRICAL

Voltage	100-277VAC, 347-480VAC
Power Factor	0.96
Dimmable	Dali, Zigbee, 1-10V Options Available

ORDERING LOGIC

EX: SLB-3-30-10-30-JU-15-BK

FAMILY	SIZE	WATTAGE	VOLTAGE	CCT	MOUNTING	BEAM ANGLE	FINISH
SLB							
	3	30 300W	10 100-277VAC STANDARD	30 3000K	JU Joint U-Bracket STANDARD	15 15°	BK Black
	4	40 400W	34 347-480VAC	40 4000K	KF Knuckle Flat Bracket	30 30°	BL Blue
	5	50 500W		50 5000K	KS Knuckle Slip Fitter	80 80°	RD Red
	6	60 600W		65 6500K			SL Silver
	7	70 700W					
	8	80 800W					
	10	100 1000W					


OPTIONS

- DALI** Dali Dimming
- ZB** Zigbee Dimming
- 1-10** 1-10V Dimming
- CC** Custom Configurations
FOR ADDITIONAL OPTIONS CONTACT SALES@SAGE.LIGHTING


DIMENSIONS

300W-600W


Front

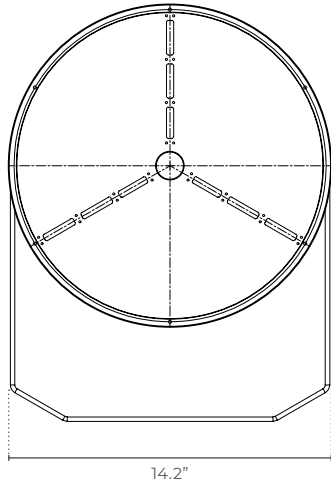

Side

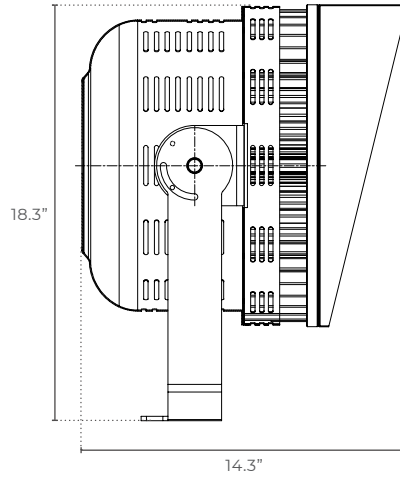


Button

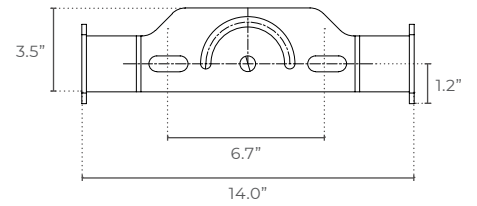


750W-1250W

Front

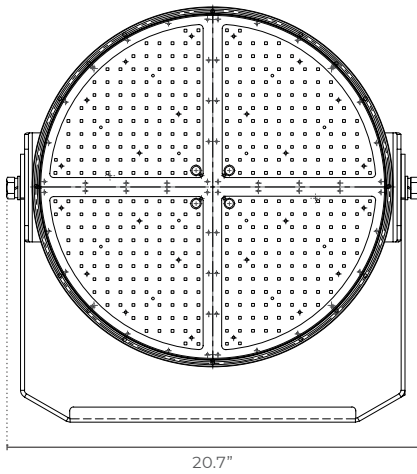

Side

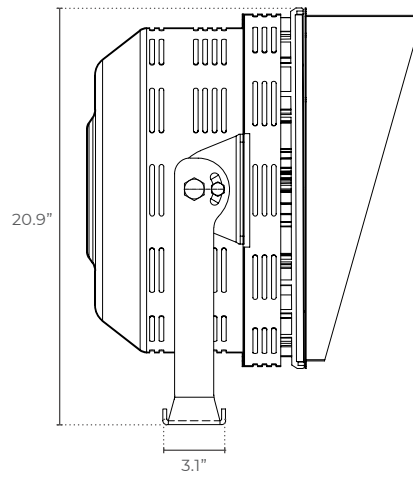

Button

