

PROJECT DATE

COMMENTS



IN STOCK



SLHR STEP LIGHT HORIZONTAL RECESSED LED

SLHR is a horizontal recessed LED step light ideal for new construction applications where low level glare free path lighting is desired. SLHR mounts to standard junction boxes, is wet location listed, and IP65 rated. SLHR is offered in four finishes and multiple CCTs with two field selectable CCT options.

- Residential
- Hospitality
- Commercial

PHYSICAL

Material	Die Cast Aluminum
Mounting	Recessed Wall — mounts to standard junction boxes
Lens	Polycarbonate
Finish	Black, Oil-Rubbed Bronze, Sand, Silver, White

PERFORMANCE

Warranty	5 years
Certifications	Wet Location, ETL, FCC, RoHS
IP Rating	IP65
Rated Life	30,000 hours
Operating Temperature	-20°C to 40°C (-4°F to 104°F)
CCT	2700K, Field Selectable: (3000K/4000K/5000K), (2700K/3000K/3500K/4000K/5000K)
CRI	90+
Beam Angle	90°

ENERGY CHART

FINISH	HEIGHT inches	WIDTH inches	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
White	2.9	4.8	110	3W	36.7
Silver, Sand	2.9	4.8	80	3W	26.7
Oil-Rubbed Bronze	2.9	4.8	55	3W	18.3
Black	2.9	4.8	55	3W	18.3

ELECTRICAL

Wattage	3W
Voltage	120V
Power Factor	>0.9
Dimmable	Triac Dimming 100-10%


ORDERING LOGIC

EX: SLHR-27-BK

FAMILY	CCT	FINISH
SLHR		
	27 2700K	BK Black
	FS3 Field Selectable <small>3000K / 4000K / 5000K</small>	ORB Oil-Rubbed Bronze
	FS5 Field Selectable <small>2700K / 3000K / 3500K / 4000K / 5000K</small>	SD Sand
		SL Silver
		WH White



DIMENSIONS

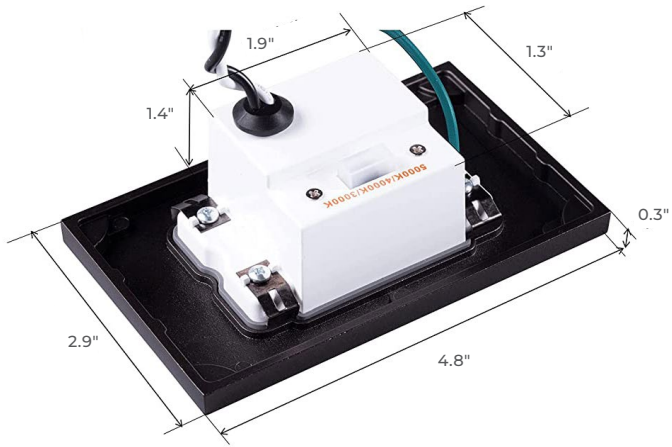

ACCESSORIES



Wire Nuts x3



Screws x4




Mounting Bracket x1

ADDITIONAL IMAGERY

White Finish



Sand Finish



Oil-Rubbed Bronze Finish



PHOTOMETRICS

AVERAGE BEAM ANGLE (50%): 96.2°

