

SPR-HO-WL SLIM PANEL ROUND LED HIGH OUTPUT WET LOCATION

PROJECT _____ DATE _____

COMMENTS _____



ENERGY CHART


SIZE	TOTAL DIAMETER inches	WATTAGE	DELIVERED LUMENS	EFFICACY lm/w
5	5.32	10	1100	110
7	7.29	15	1650	110

ORDERING LOGIC

EX: SPR-HO-WL-5-30-BK

FAMILY	SIZE	CCT	FINISH
SPR-HO-WL	5 5.3"	30 3000K	BK Black
	7 7.3"	40 4000K	BN Brushed Nickel
		50 5000K	WH White

DIMENSIONS

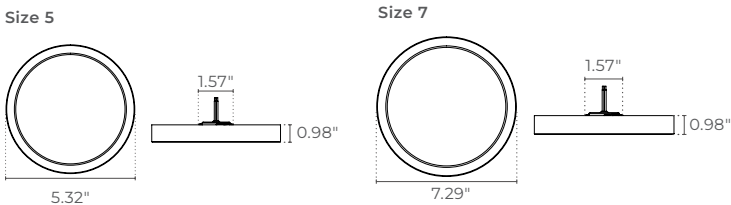

The SPR-HO-WL series offers a IP65 rated, low-profile, high output surface mount LED luminaire that is suitable for wet locations.

- Residential
- Commercial
- Hospitality

PHYSICAL

Mounting	Surface
Finish	Black, Brushed Nickel, White

PERFORMANCE

Warranty	5 years
Certifications	Wet Location, ETL, Energy Star, FCC
IP Rating	IP65
Rated Life	L70 50,000 hours
Operating Temperature	-20°C to 40°C (-4°F to 104°F)
CCT	3000K, 4000K, 5000K
CRI	80+
Beam Angle	120°

ELECTRICAL

Wattage	10W, 15W
Voltage	120V
Power Factor	≥0.9
Dimmable	100% - 10% Triac Dimming

STRUCTURE

