

PROJECT  DATE

COMMENTS



## SPR-WL-CR SLIM PANEL ROUND LED WET LOCATION CLOSET RATED

The SPR-WL-CR series is a 0.82" low-profile, closet-rated, field selectable CCT surface mount LED luminaire that is suitable for wet locations. SPR-WL-CR is suitable for use in clothes closet storage spaces per UL 1598 Ed.5-2021 and CSA C22.2 #250 Ed.5-2021 testing standards which complies with NEC 410.16 requirements for Luminaires in Clothes Closets.

- Residential
- Commercial
- Hospitality

### PHYSICAL

Material	Die Cast Aluminum
Mounting	2.75"/3"/4" J-Boxes All Sizes, 5"/6" Cans Size 7 Only
Lens	PS
Finish	White

### PERFORMANCE

Warranty	5 years
Certifications	Wet Location, Energy Star, Title 24, Closet Rated (NEC 410.16)
Rated Life	L70 > 50,000 Hours
Operating Temperature	-4°F to 113°F (-20°C to 45°C)
CCT	Field Selectable: 2700K/3000K/3500K/4000K/5000K
CRI	90+
Beam Angle	120°

### ENERGY CHART

SIZE	TOTAL DIAMETER inches	WATTAGE	DELIVERED LUMENS (3000K)	EFFICACY lm/w
5	5.5	7	520	74.3
7	7.5	12	1000	83.3

### ELECTRICAL

Wattage	7W, 12W
Voltage	120V 60Hz
Power Factor	≥0.7
Dimmable	100% - 5% Triac Dimming
THD	<30%

### ORDERING LOGIC

EX: SPR-WL-CR-5-FS-WH

FAMILY	SIZE	CCT	FINISH*
SPR-WL-CR		FS	WH
	5 5.5"	FS Field Selectable 2700K / 3000K / 3500K / 4000K / 5000K	WH White
	7 7.5"		

### TRIM FINISHES



\*Additional trim finishes available as a separate accessory attachment, see page 2

SEE ACCESSORIES ORDERING LOGIC ON PAGE 2





ACCESSORIES ORDERING LOGIC (ORDER SEPARATELY)

EX: SPR-WL-5-30-BK

TRIM	SIZE	FINISH	EMERGENCY
<b>SPR-WL-TRIM</b>			
	<b>5</b> 5"	<b>BK</b> Black	<b>JBEM</b> Junction Box Emergency Backup
	<b>7</b> 7"	<b>BZ</b> Bronze	
		<b>BN</b> Brushed Nickel	

DIMENSIONS

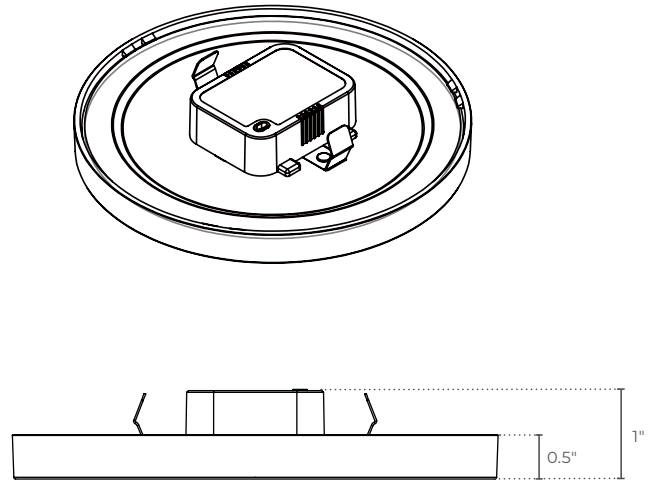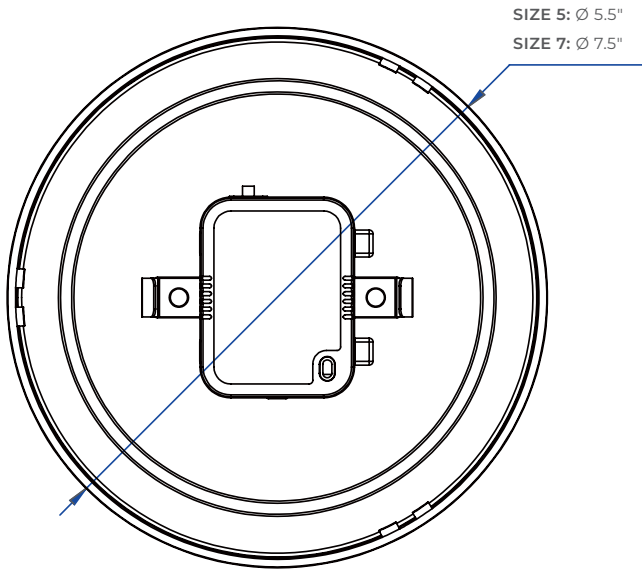

RECOMMENDED DIMMERS

LEVITON MODELS

- 6672
- 6674
- RNL06
- DSL06
- IPL06

LUTRON MODELS

- TG-600PR-WH
- TGCL-153PH-LA
- SCL-153PH-WH

- MSCL-OP153M
- S-600PR-WH
- SLV-600P-AL

- GT-600P
- MACL-153M//MA-R
- CTCL-153PDH-WH

- DV-600PR-WH
- DVCL-153P
- PD-6WCL



**TRIMS**

SPR-WL-TRIM-5-BK



SPR-WL-TRIM-5-BZ



SPR-WL-TRIM-5-BN



SPR-WL-CR-TRIM-7-BK



SPR-WL-TRIM-7-BZ




SPR-WL-TRIM-7-BN




**TRIM DIMENSIONS**

SPR-WL-TRIM-5

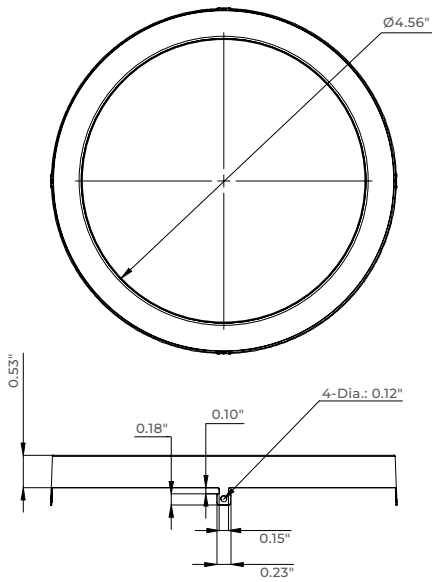


SPR-WL-TRIM-7

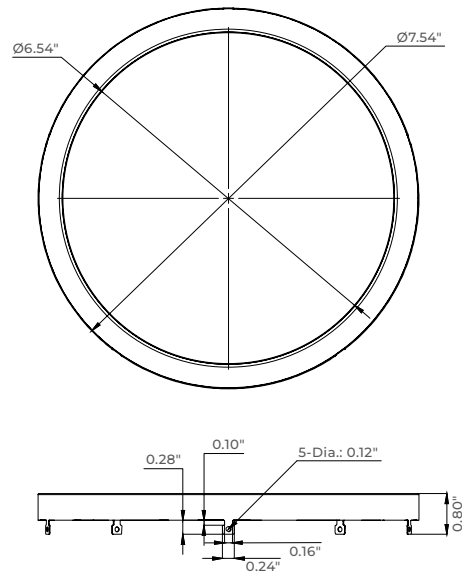

**EMERGENCY SPECIFICATION**

**JBEM Junction Box Emergency Backup**

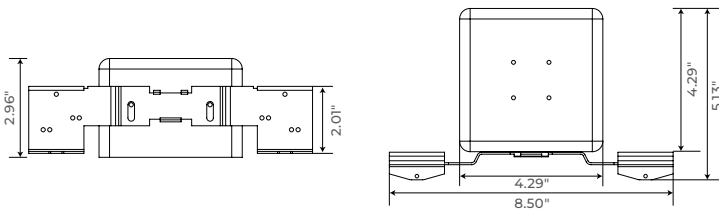

**TECHNICAL SPECIFICATIONS**

Wattage	15W
Input Voltage	AC 120V
Output Voltage	≤ AC 110V
Emergency Time	1.5 hours
Initial Charge Time	24 hours
IP Rating	IP20
Battery Type	Li-ion
Dimensions	8.50" x 5.13" x 2.96"(216 x 130.4 x 75.2mm)
Operating Temp.	41°F – 122°F (5°C–50°C)
Warranty	5 years

**Emergency LED Driver**



**TECHNICAL SPECIFICATIONS**

Input Voltage	120V AC,50/60Hz
Input Current(Max.)	100mA
Input Power(Max.)	≤ 5W
Emergency Time	90 minutes
Charging Time	24 hours
Output Voltage	≤110V AC
Warranty	5 years
Adaptive Power	≤ 15W
Battery Type	Li-ion
Ambient Temp.	41°F – 122°F (5°C–50°C)

