



DUNTON HOUSE

DECORATIVE LIGHTING

SQUIRE-EM FLUSH MOUNT LED WITH INTEGRAL EMERGENCY BATTERY

PROJECT DATE

COMMENTS



DISCONTINUED

PHYSICAL

Material	Die-Cast Aluminum
Mounting	Surface (Ceiling/Wall), 3" & 4" J-Boxes
Finish	Bronze, Brushed Nickel, White
CCT	2700K, 3000K, 4000K, 5000K, 6000K, Field Selectable 2CCT
CRI	80+ or 90+
Beam Angle	120°

PERFORMANCE

Warranty	5 years
Certifications	Damp Location, CETL, Energy Star
IP Rating	IP44
Rated Life	L70 30,000 hours
Operating Temperature	-20°C to 50°C (-4°F to 122°F)

ELECTRICAL

Wattage	18.5W
Voltage	120V, 277V, 120-277V
Power Factor	0.98
Dimmable	Triac Dimming



ENERGY CHART

SIZE	LENGTH inches	WIDTH inches	LUMENS	WATTAGE	EFFICACY lm/w	VOLTAGE
9	9.0	9.0	1320	18.5	71.4	120V / 277V 120-277V

NOTES

Usage Indoor (Ceiling/Wall), Outdoor (Covered Ceiling)


ORDERING LOGIC

EX: SQUIRE-EM-9-12-27-80-BZ

FAMILY	SIZE	VOLTAGE	CCT	CRI	FINISH
SQUIRE-EM	9	12 120V 27 277V UNV 120-277V	27 2700K 30 3000K 40 4000K 50 5000K 60 6000K FS2 Field Selectable CHOOSE2	80 80+ 90 90+	BZ Bronze
					BN Brushed Nickel
					WH White



DIMENSIONS

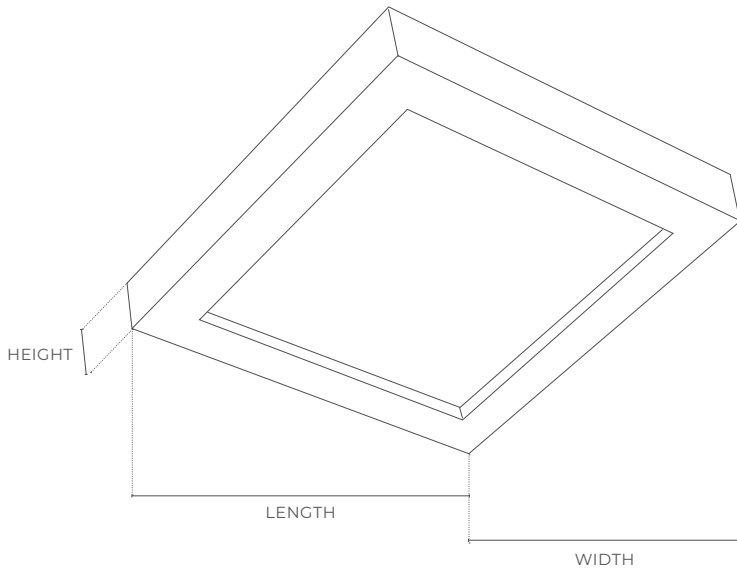

SIZE	LENGTH inches	WIDTH inches	HEIGHT inches
9	9.0	9.0	1.0

PHOTOMETRICS

Beam Angle: 108°

