

## SW-2X STATIC WHITE LED TAPELIGHT DUAL ROW

The SW-2X is a flexible, double row LED ribbon line that offers a high light output with a variety of color temperatures.


- Static-White Family
- 90+ CRI
- Indoor

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_

COMMENTS \_\_\_\_\_



IP20



### PHYSICAL

Mounting	3M Adhesive
Cut Length	Varies, See Back
Maximum Run	16' 4"
CCT	1800K, 2200K, 2700K, 3000K, 3500K, 4000K, 4500K, 5000K, 6000K, 6500K
CRI	90+

### ELECTRICAL

Voltage	24V DC Constant Voltage Output
Dimming	0-10V

### PERFORMANCE

Warranty	5 years
Certification	UL, CUL, CE, ROHS Approved
IP Rating	IP20

### APPLICATIONS

- Cove & Perimeter Lighting
- Architectural Back Lighting
- Walls & Surfaces
- Stairs & Walkways
- Decorative Signage
- Channel Letters

### ENERGY CHART


TYPE	CCT		POWER w/ft	LUMENS/FT	EFFICACY lm/w
	2700K	4500K			
SW-2X-9	3000K	5000K	8.8	731.5	83
	3500K	6000K			
	4000K				
SW-2X-12	1800K	3500K	11.7	975.4	83
	2200K	4000K			
	2700K	5000K			
	3000K	6500K			

### ORDERING LOGIC

EX: SW-2X-9-27-ST

FAMILY	TYPE	POWER	CCT		LENGTH
<b>SW</b>	<b>2X</b>				<b>ST</b>
	<b>2X</b> Dual Row	<b>9</b> 8.8W/Ft	<b>SW-2X-9</b>	<b>SW-2X-12</b>	<b>ST</b> 16'; Cut in Field STANDARD
		<b>12</b> 11.7W/Ft	<b>27</b> 2700K	<b>18</b> 1800K	
			<b>30</b> 3000K	<b>22</b> 2200K	
			<b>35</b> 3500K	<b>27</b> 2700K	
			<b>40</b> 4000K	<b>30</b> 3000K	
			<b>45</b> 4500K	<b>35</b> 3500K	
			<b>50</b> 5000K	<b>40</b> 4000K	
			<b>60</b> 6000K	<b>50</b> 5000K	
				<b>65</b> 6500K	

**DIMENSIONS**

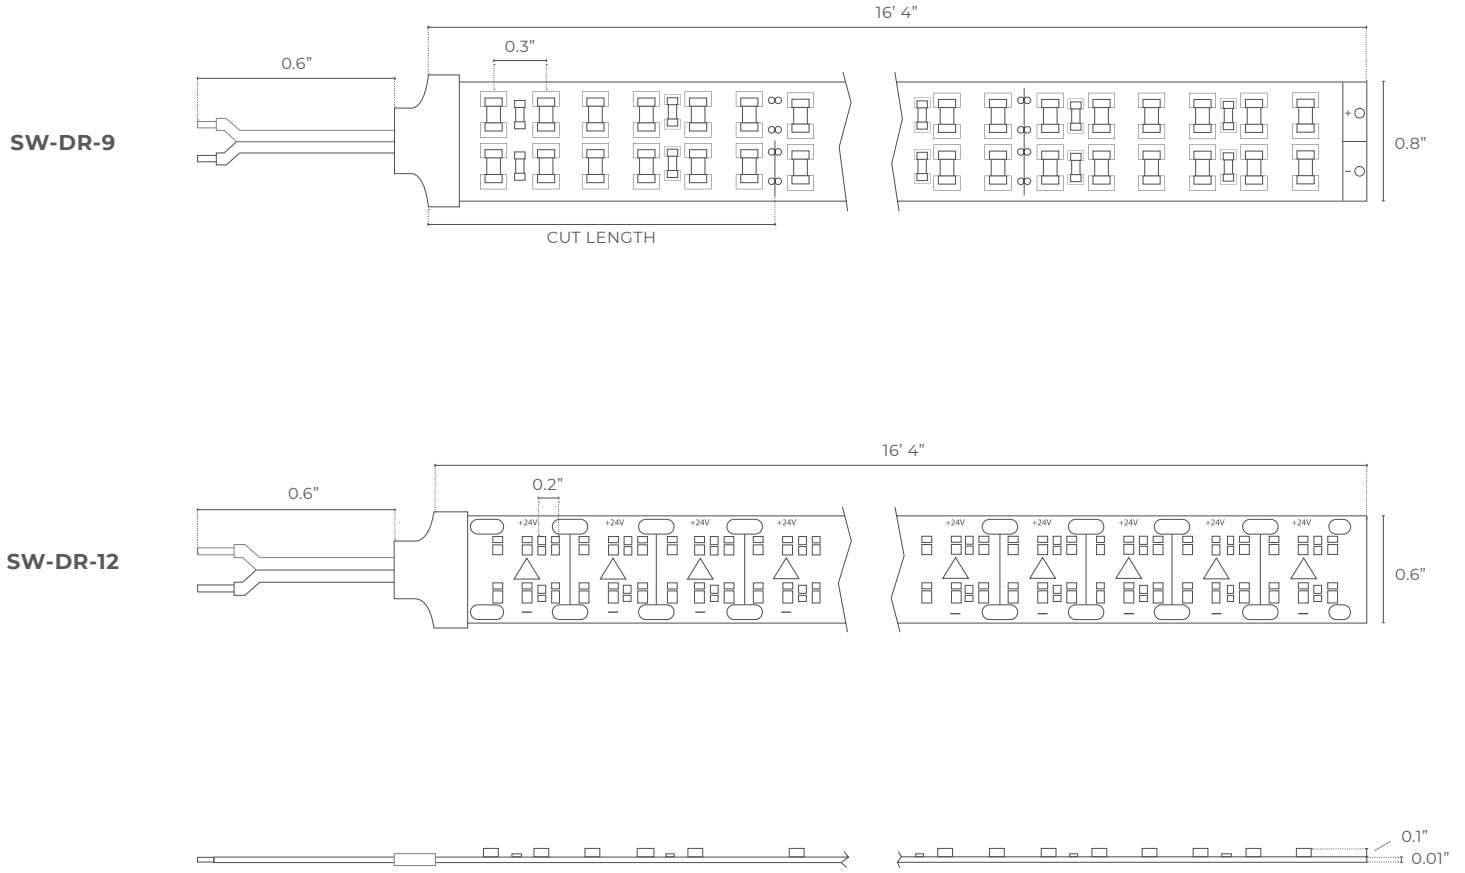

**CONNECTION DRAWINGS OF SINGLE COLOR**

