

SW-2X STATIC WHITE LED TAPELIGHT DUAL ROW

The SW-2X is a flexible, double row LED ribbon line that offers a high light output with a variety of color temperatures.

- Static-White Family
- 90+ CRI
- Indoor


PROJECT

DATE

COMMENTS



IP20



PHYSICAL

Mounting	3M Adhesive
Cut Length	Varies, See Back
Maximum Run	16' 4"

PERFORMANCE

Warranty	5 years
Certification	UL, CUL, CE, RoHS Approved
IP Rating	IP20
Dimming	Universal (See Recommended Drivers)
CCT	1800K, 2200K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
CRI	90+

ELECTRICAL

Voltage	24V DC Constant Voltage Output
---------	--------------------------------

APPLICATIONS

Cove & Perimeter Lighting
Architectural Back Lighting
Walls & Surfaces
Stairs & Walkways
Decorative Signage
Channel Letters

ENERGY CHART


TYPE	CCT		POWER w/ft	LUMENS/FT	EFFICACY lm/w
SW-2X-9	2700K	4500K	8.8	731.5	83
	3000K	5000K			
	3500K	6000K			
	4000K				
SW-2X-12	1800K	3500K	11.7	975.4	83
	2200K	4000K			
	2700K	5000K			
	3000K	6500K			

ORDERING LOGIC


EX: SW-2X-9-27-ST

FAMILY	TYPE		POWER		CCT		LENGTH	
SW	2X						ST	
	2X	Dual Row	9	8.8W/Ft	SW-2X-9	SW-2X-12	ST	16'; Cut in Field STANDARD
			12	11.7W/Ft	27	2700K	18	1800K
					30	3000K	22	2200K
					35	3500K	27	2700K
					40	4000K	30	3000K
					50	5000K	35	3500K
							40	4000K
							50	5000K
							65	6500K

DIMENSIONS

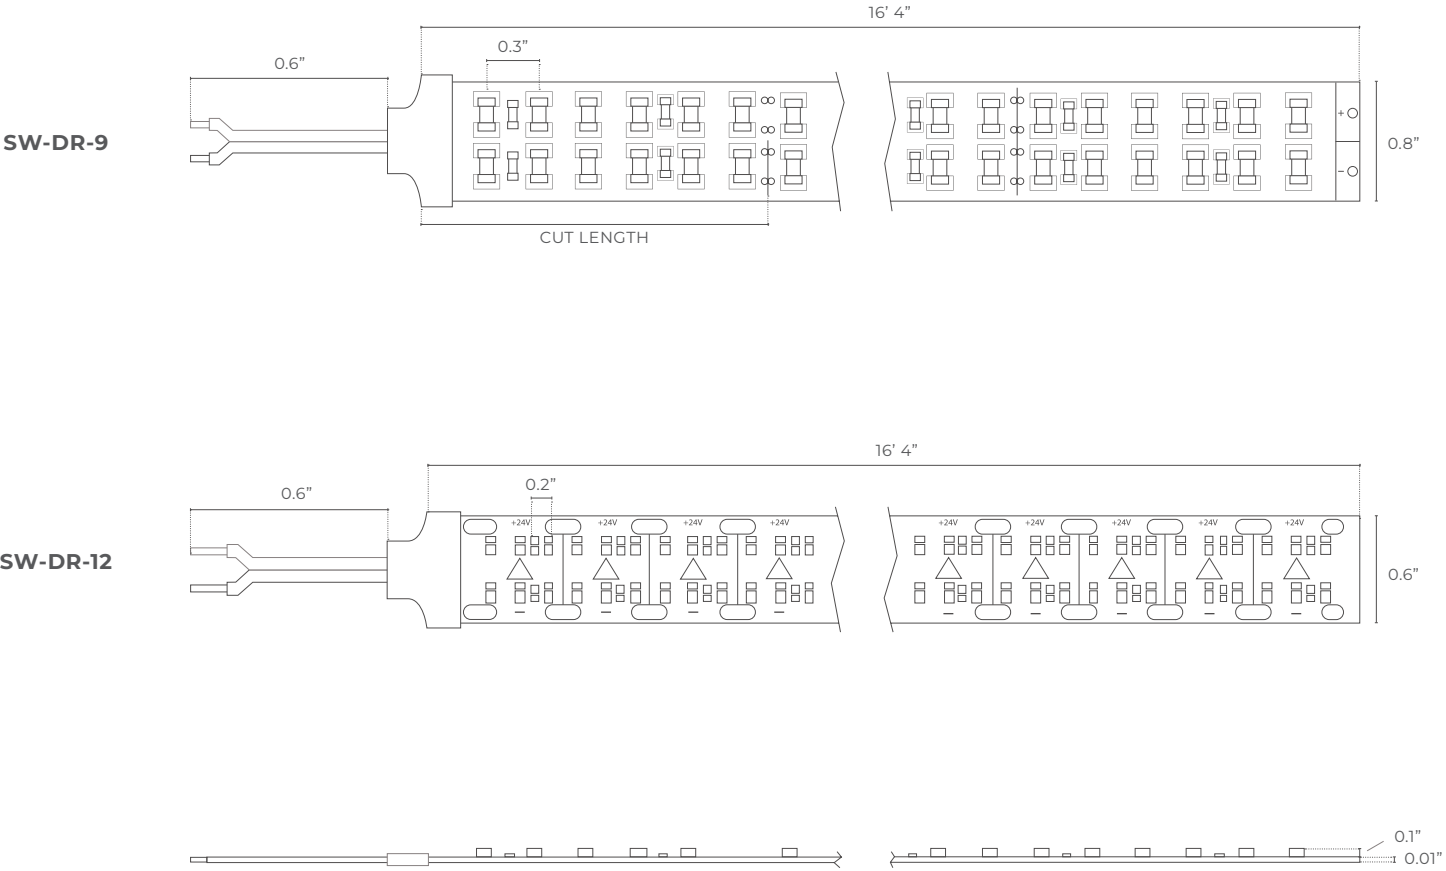

CONNECTION DRAWINGS OF SINGLE COLOR

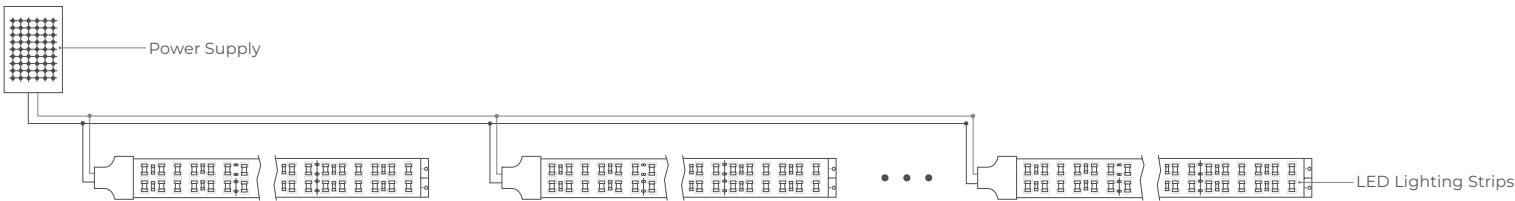

RECOMMENDED DRIVERS

D-60W

60W Constant Voltage LED Driver 5 In 1 Dimming Function



D-60W-ND

60W Constant Voltage LED Driver Non-Dimming



D-96W

96W Constant Voltage LED Driver 5 In 1 Dimming Function



D-300W

300W Constant Voltage LED Driver 5 In 1 Dimming Function

