

PROJECT DATE

COMMENTS



IN STOCK



ENERGY CHART

SIZE feet	DELIVERED LUMENS	WATTAGE	EFFICACY lm/w
2x2	2340	18	130
	3640	28	130
	4940	38	130
2x4	3640	28	130
	4940	38	130
	6240	48	130

ORDERING LOGIC

EX: TCB-QS-22

FAMILY	SIZE
TCB-QS	<input type="text"/>
	22 2x2
	24 2x4

TCB-QS TROFFER CENTER BASKET LED QUICK SHIP

The TCB-QS Series is a CCT and wattage selectable volumetric troffer, available in 2x2 and 2x4 configurations. TCB-QS is ideal for new construction and retrofit applications. TCQ-QS utilizes linear prisms on the inside of the diffuser to improve visual uniformity across the entire lens area. TCQ-QS is suitable for damp locations.

- Hospitality
- Commercial
- Indoor

PHYSICAL

Material	Steel Body, Aluminum Heatsink
Lens	Prismatic Acrylic Diffuser
Mounting	Recessed
Finish	White

PERFORMANCE


Warranty	5 years
Certifications	cULus, DLC Premium, Damp Location
IP Rating	IP41
Rated Life	L80 50,000 hours
Operating Temperature	-40°C to 45°C (-40°F to 113°F)
CCT	Field Selectable 3CCT: 3500K, 4000K, 5000K
CRI	>80
Beam Angle	110°

ELECTRICAL


Wattage	2x2 Field Selectable: 18W/28W/38W 2x4 Field Selectable: 28W/38W/48W
Voltage	100-277VAC 50/60Hz
Dimmable	0-10V
Power Factor	≥0.9
THD	≤20%

DIMENSIONS

2X4

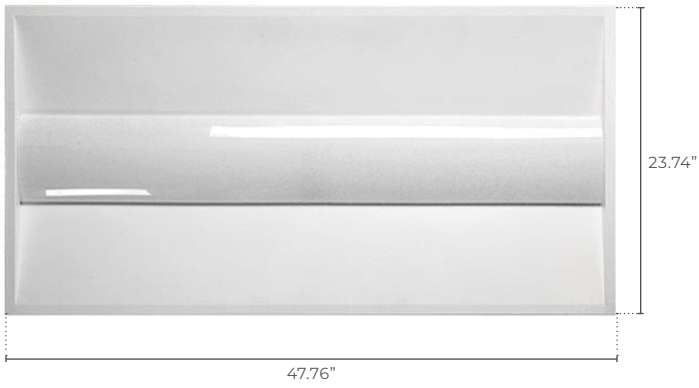

2X2

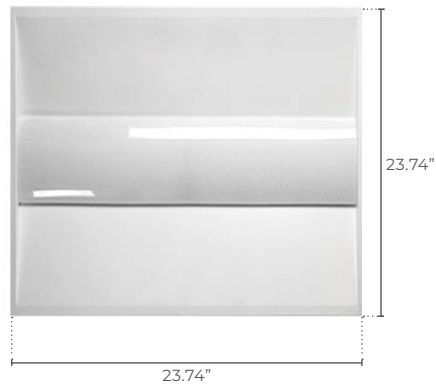

Side View



ADDITIONAL IMAGERY

2X4



2X2

